

Crawler Crane

LR 1200
Litronic®

EN


LR 1004.02



LIEBHERR

Dimensions

Basic machine with undercarriage

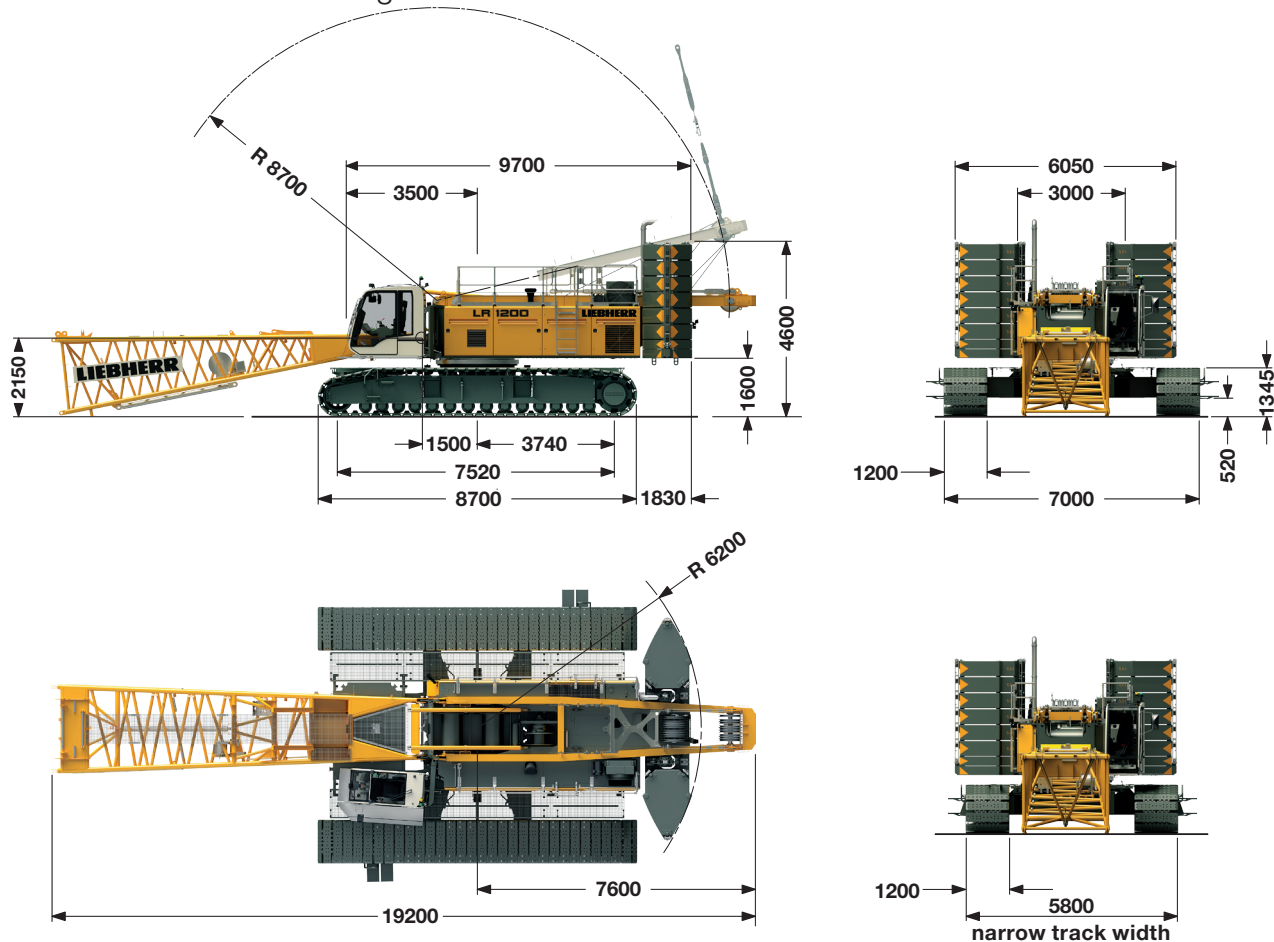

Operating weight

The operating weight includes the basic machine with crawlers, 2 main winches 120 kN including wire ropes (260 m and 495 m) and 20 m main boom, consisting of A-frame, boom foot (10 m), boom head (7 m), boom extension (3 m), 82.3 t basic counterweight, 36 t carbody counterweight and 250 t hook block.

Total weight ————— approx. 210 t

Ground pressure

The actual ground pressure is calculated according to the configuration and position of the machine and displayed in the operator's cab. Using the optional Liebherr Crane-Planner the actual ground pressure, amongst other parameters, can already be calculated and displayed in the planning stage.

Equipment


| | |
|---------------------------------------|------------------|
| Main boom (No. 2320.xx) max. length | 89 m |
| High reach (No. 2320.xx und 1916.xx) | 117 m |
| Luffing jib (No. 1916.xx) max. length | 95 m |
| Max. combination | main boom 53 m |
| | luffing jib 95 m |
| Fixed jib (No. 1008.xx) | 11 – 26 m |
| Auxiliary jib 24 t (option 36 t) | |

Remarks


1. The lifting capacities stated are valid for lifting operation only (corresponding with crane classification according to F.E.M. 1.001. crane group A1).
2. Crane standing on firm, horizontal ground.
3. The weight of the lifting device (hoisting ropes, hook block, shackle etc.) must be deducted from the gross lifting capacity to obtain a net lifting value.
4. Additional equipment on boom (e.g. boom walkways, auxiliary jib) must be deducted to get the net lifting capacity.
5. For max. wind speed please refer to lift chart in operator's cab or manual.
6. Working radii are measured from center of swing and under load.
7. The lifting capacities are valid for 360 degrees of swing.
8. Calculation of stability under load is based on DIN 15019 / part 2 / chart 1 and ISO 4305 Table 1 + 2, tipping angle 4°.
9. The structures are calculated according to F.E.M. 1.001 - 1998 (EN 13001-1; EN 13001-2).

Transport dimensions and weights

Basic machine and main boom (No. 2320.xx)

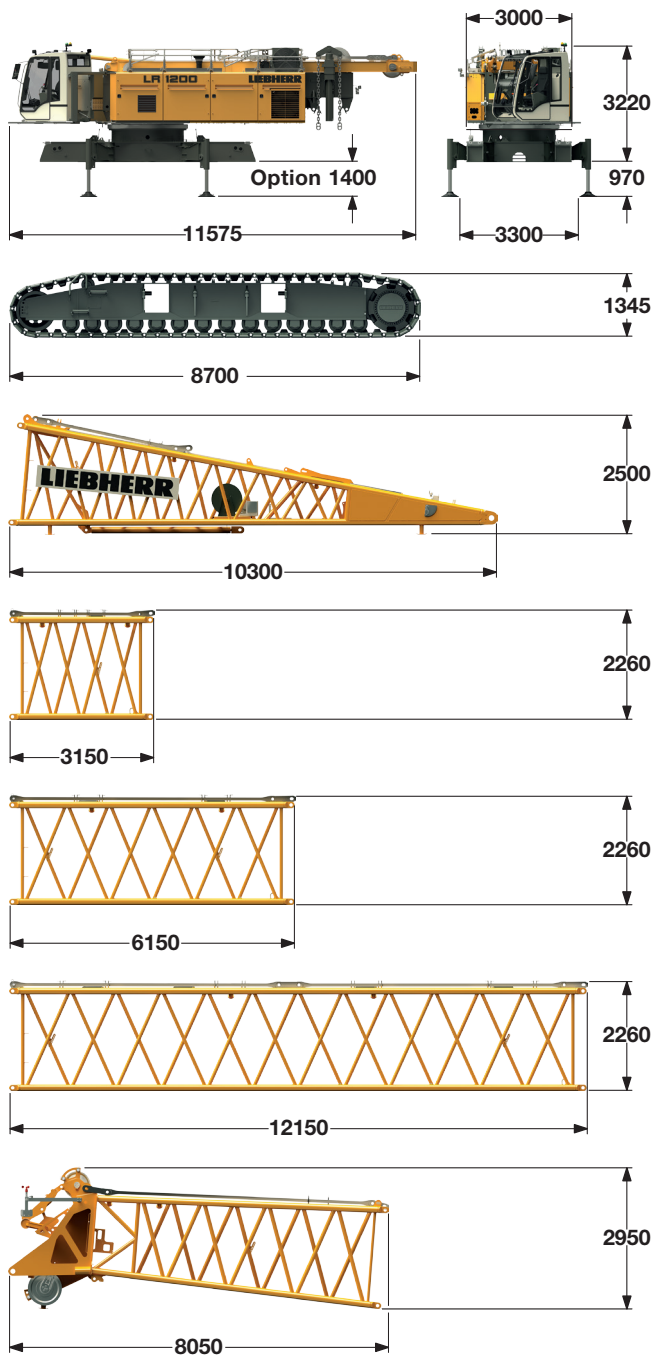

Transport option

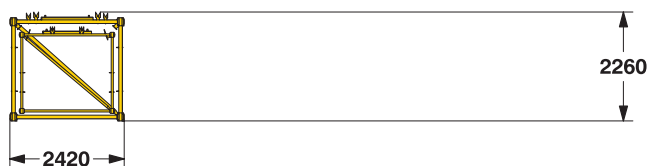

Basic machine

with A-frame, 2x 120 kN crane winches without boom foot, hoist ropes, basic counterweight and crawlers

| | |
|----------------------|-----------|
| Width | 3000 mm |
| Weight | 42500 kg |
| Weight of hoist rope | 3.42 kg/m |

Crawler

2x

| | |
|------------|----------|
| Track pads | 1200 mm |
| Width | 1200 mm |
| Weight | 19800 kg |

Boom foot (No. 2320,25)

| | |
|-----------------------------|---------|
| Width | 2430 mm |
| Weight incl. winch and rope | 5600 kg |
| Weight without winch | 4000 kg |

Boom section (No. 2320,23)

3 m

| | |
|---|---------|
| Width | 2430 mm |
| Weight with HPT ¹⁾ | 830 kg |
| Weight with HPT ¹⁾ and NDL ²⁾ | 920 kg |

Boom section (No. 2320,20)

6 m

| | |
|---|---------|
| Width | 2430 mm |
| Weight with HPT ¹⁾ | 1125 kg |
| Weight with HPT ¹⁾ and NDL ²⁾ | 1285 kg |

Boom section (No. 2320,20)

12 m

| | |
|---|---------|
| Width | 2430 mm |
| Weight with HPT ¹⁾ | 2030 kg |
| Weight with HPT ¹⁾ and NDL ²⁾ | 2380 kg |

Boom head (No. 2320,23)

| | |
|-------------------------------|---------|
| Width | 2430 mm |
| Weight with HPT ¹⁾ | 4200 kg |

1) Pendant straps for main boom • 2) Pendant straps for jib


Boom transport option

| | | | | |
|-----------------------|-------|------|------|----|
| (No. 2320.xx/1916.xx) | 12/12 | 6/6 | 3/3 | m |
| Length | 12250 | 6250 | 3250 | mm |
| Weight* | 3610 | 1975 | 1475 | kg |

*) Including pendant straps

Transport dimensions and weights

Luffing jib (No. 1916.xx)

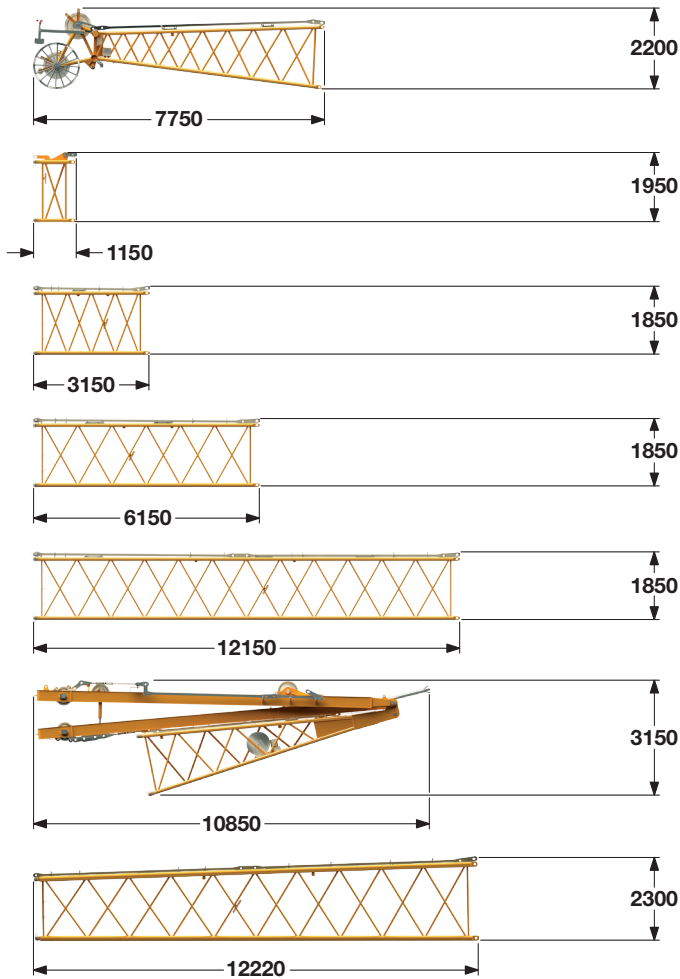

Luffing jib head (No. 1916.21)

| | |
|---------|---------|
| Width | 2010 mm |
| Weight* | 1515 kg |

L-boom jib section (No. 1916.22)

1 m

| | |
|---------|---------|
| Width | 2010 mm |
| Weight* | 460 kg |

Luffing jib section (No. 1916.18)

3 m

| | |
|---------|---------|
| Width | 2010 mm |
| Weight* | 475 kg |

Luffing jib section (No. 1916.18)

6 m

| | |
|---------|---------|
| Width | 2010 mm |
| Weight* | 690 kg |

Luffing jib section (No. 1916.18)

12 m

| | |
|---------|---------|
| Width | 2010 mm |
| Weight* | 1250 kg |

Luffing jib foot with A-frames (No. 1916.22)

| | |
|---------|---------|
| Width | 2010 mm |
| Weight* | 6220 kg |


L-boomsection tapered (No. 2320/1916.20)

12 m

| | |
|---------|---------|
| Width | 2430 mm |
| Weight* | 1700 kg |

*) Including pendant straps

Fixed jib (No. 1008.xx)

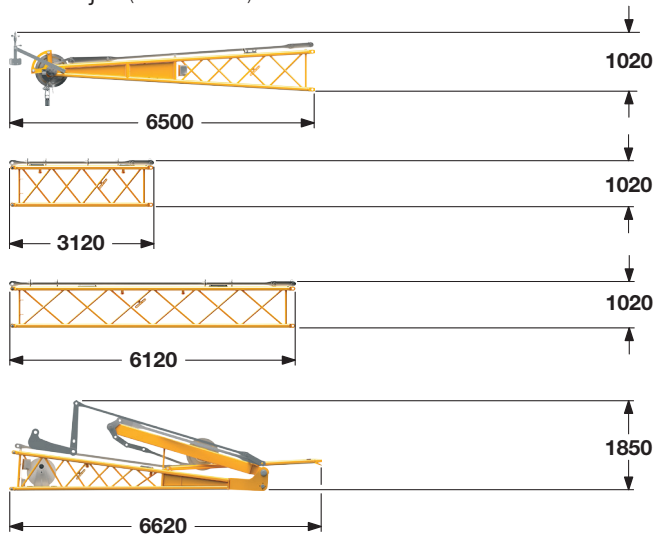

Fixed jib head (No. 1008.20)

| | |
|---------|---------|
| Width | 1090 mm |
| Weight* | 875 kg |

Fixed jib section (No. 1008.17)

3 m

| | |
|---------|---------|
| Width | 1090 mm |
| Weight* | 300 kg |

Fixed jib section (No. 1008.17)

6 m

| | |
|---------|---------|
| Width | 1090 mm |
| Weight* | 455 kg |


Fixed jib foot with A-frame (No. 1008.20)

| | |
|---------|---------|
| Width | 2200 mm |
| Weight* | 2050 kg |

*) Including pendant straps

Transport dimensions and weights

Counterweight

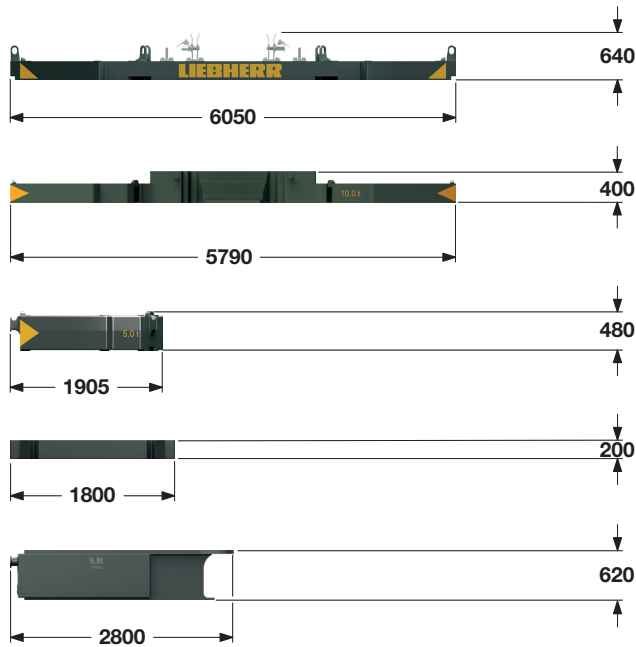

Counterweight **1x**

| | |
|--------|----------|
| Width | 1660 mm |
| Weight | 12000 kg |

Counterweight **1x**

| | |
|--------|----------|
| Width | 1660 mm |
| Weight | 10000 kg |

Counterweight **12x**

| | |
|--------|---------|
| Width | 1360 mm |
| Weight | 5000 kg |


Carbody counterweight **2x**

| | |
|--------|---------|
| Width | 3340 mm |
| Weight | 8300 kg |

Carbody counterweight **2x**

| | |
|--------|---------|
| Width | 3340 mm |
| Weight | 9800 kg |


Mid fall (option)

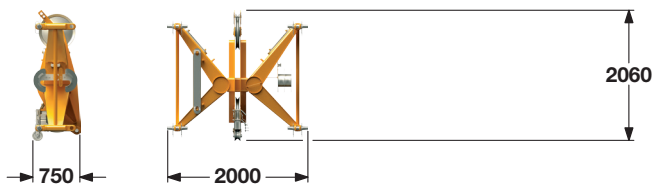

Mid fall section (No. 1916.xx) **0.5 m**

| | |
|--------|--------|
| Width | 750 mm |
| Weight | 715 kg |

Hooks

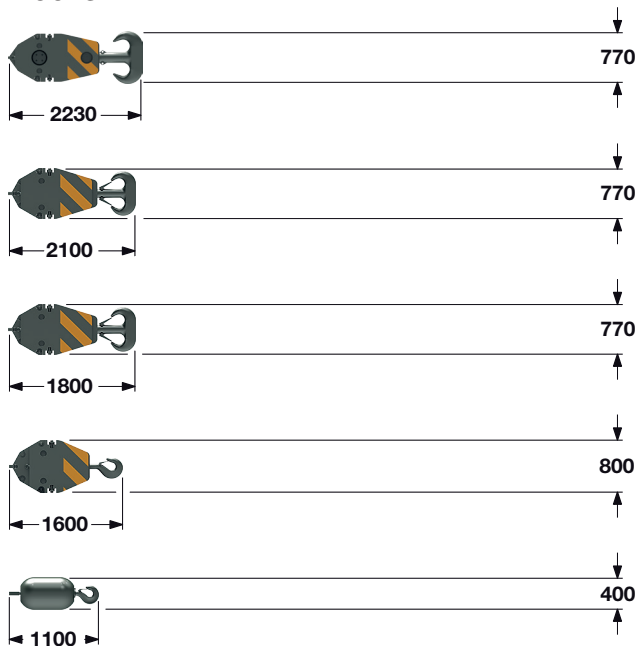

250 t hook block – 11 sheaves

| | | |
|--------|------|---------|
| Width | 1030 | 1250 mm |
| Weight | 2300 | 3200 kg |

160 t hook block – 7 sheaves

| | | | |
|--------|------|------|---------|
| Width | 640 | 760 | 880 mm |
| Weight | 1500 | 2250 | 3000 kg |

100 t hook block – 5 sheaves

| | | | |
|--------|------|------|---------|
| Width | 540 | 670 | 770 mm |
| Weight | 1300 | 1800 | 2300 kg |

40 t hook block – 1 sheave

| | | | |
|--------|-----|------|---------|
| Width | 300 | 400 | 500 mm |
| Weight | 700 | 1100 | 1500 kg |

12.5 t single hook

| | |
|--------|--------|
| Width | 400 mm |
| Weight | 600 kg |

Boom combinations



Technical description



Engine

Power rating according to ISO 9249, 230 kW (308 hp) at 1700 rpm
Engine type — Liebherr D 944 A7-04
Fuel tank — 790 l capacity with continuous level indicator and reserve warning
Engine complies with NRMM exhaust certification EPA/CARB Tier 4f and 97/68 EC Stage IV.



Hydraulic system

A double axial displacement pump supplies the open loop hydraulic system, allowing all functions to be operated simultaneously. To minimize peak pressure an automatic working pressure cut-off is integrated in the pump. All filters are electronically monitored. The use of synthetic environmentally friendly (biodegradable) oils is possible.
Working pressure — max. 350 bar
Oil tank capacity — 650 l



Luffing jib winch

Line pull — max. 105 kN
Rope diameter — 20 mm
Jib luffing — 51 sec. from 15° to 78°



Boom winch

Line pull — max. 217 kN
Rope diameter — 24 mm
Boom up — 130 sec. from 15° to 86°



Crawlers

Propulsion through axial piston motor, hydraulically released spring loaded multi-disc brake, crawler tracks, hydraulic chain tensioning device.
Track pads — 1200 mm
Drive speed — 0 – 1.6 km/h



Swing

Consists of rollerbearing with external teeth, swing drive with fixed axial piston hydraulic motor, spring loaded and hydraulically released multi-disc holding brake, planetary gearbox and pinion.
Both swing modes are possible – speed control or free swing.
A multi-disc holding brake acts automatically at zero swing motion. Swing speed from 0 – 3 rpm continuously variable.



Main winches

Line pull (7th layer) — 120 kN
Rope diameter — 26 mm
Drum diameter — 580 mm
Rope speed — 0 – 136 m/min
Rope capacity in 7 layers — 489 m
The winches are outstanding in their compact design and easy assembly. Propulsion is via a planetary gearbox in an oil bath.
Load support by the hydraulic system; additional safety factor provided by a spring loaded, multi-disc holding brake. The main winches use pressure controlled, variable flow hydraulic motors. This system features sensors that automatically adjust oil flow to provide max. winch speed depending on load.

Option – winch with free-fall system:

Clutch and braking functions on the free-fall system are provided by a compact designed, low wear and maintenance-free multi-disc brake.



Control

The heart of the hydraulic crawler cranes is the Liebherr control system which has been developed and manufactured in-house. It includes all control and monitoring functions and is designed to withstand extreme environmental conditions and heavy duty construction tasks. Complete machine operating data as well as warning signals and irregularities are clearly displayed on the high resolution monitor in the operator's cab in the required language.
The electro-hydraulic proportional control allows several movements to be performed simultaneously. This ensures that all categories of loads can be positioned with utmost precision.

Option:

GSM/GPRS telematics module




Noise emission


Noise emissions correspond with 2000/14/EC directive.

Guaranteed sound pressure level L_{PA} in the cabin — ≤ 72.9 dB(A)
Guaranteed sound power level L_{WA} — ≤ 107 dB(A)
Vibration transmitted to the hand-arm system of the machine operator — < 2.5 m/s²
Vibration transmitted to the whole body of the machine operator — < 0.5 m/s²


Self assembly system

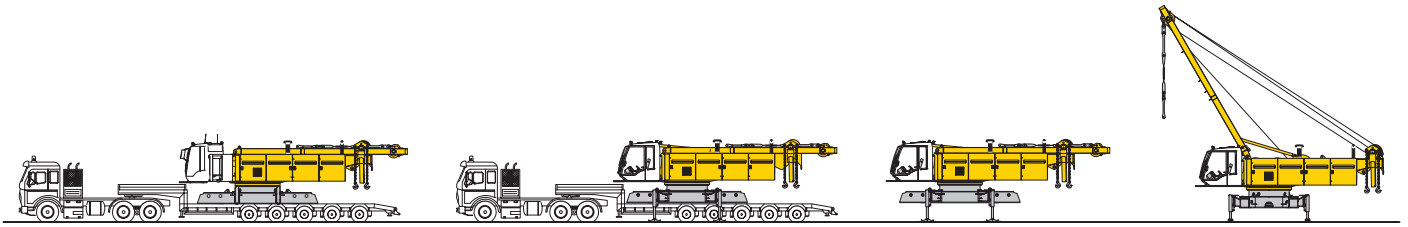


Unloading of basic machine

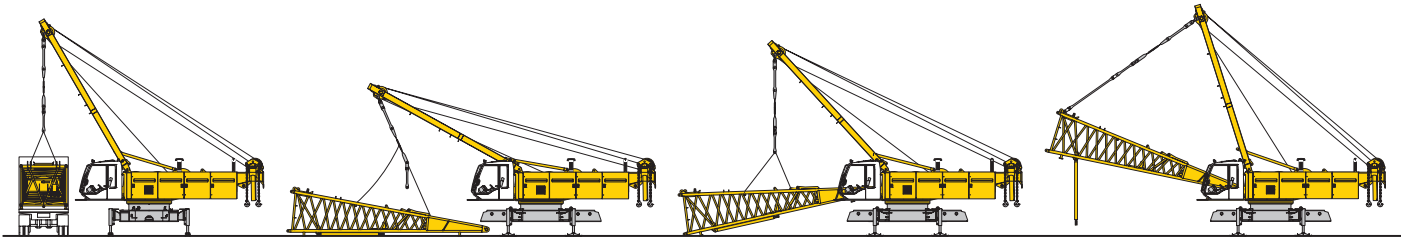

Unloading and assembly of boom foot

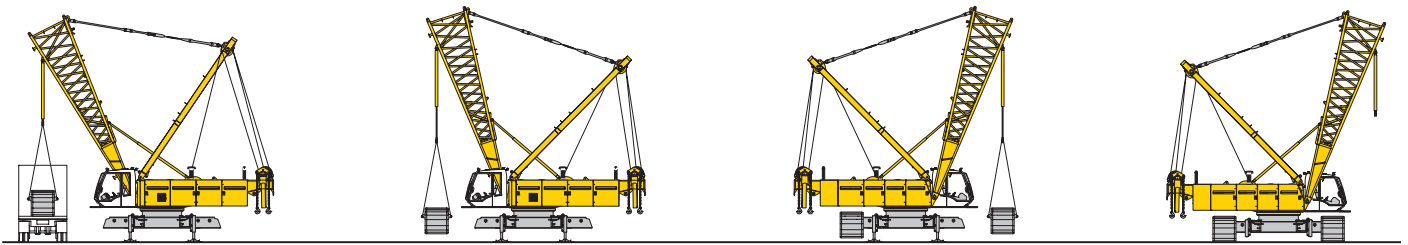


Unloading and assembly of crawlers

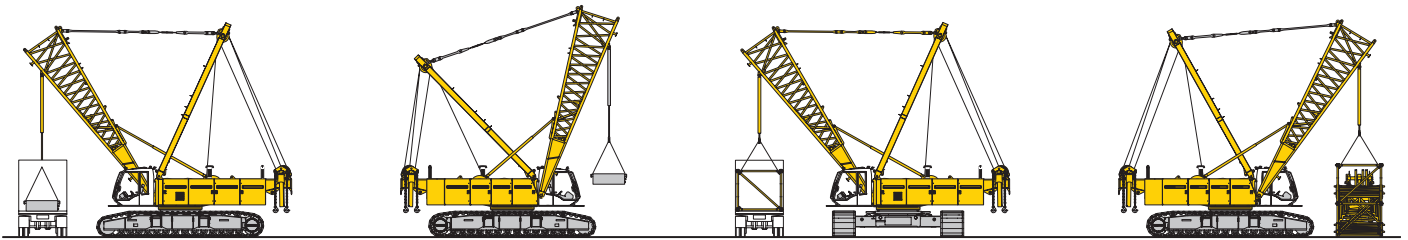


Unloading and assembly of carbody counterweight

Entladung und Zusammenbau des Auslegers

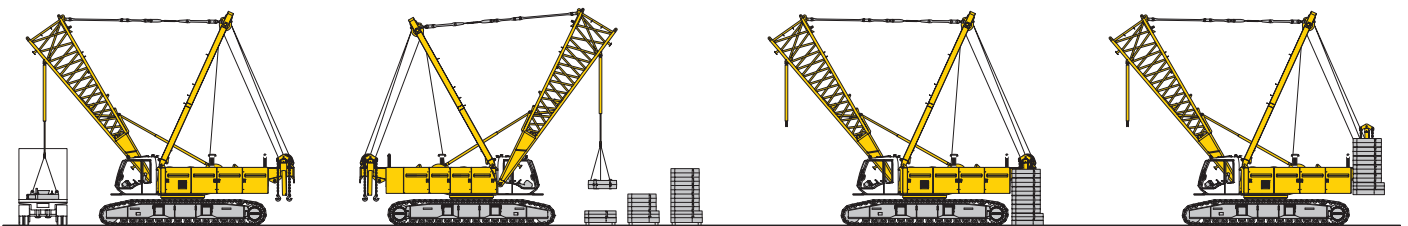


Unloading and assembly of counterweight


Erecting of main boom to working position

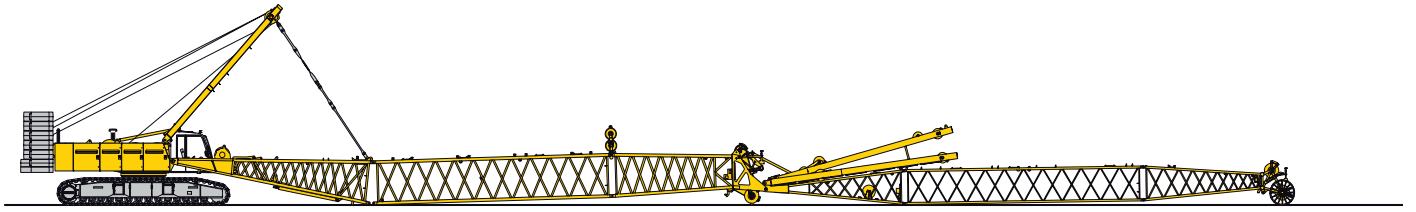


Assembly of boom

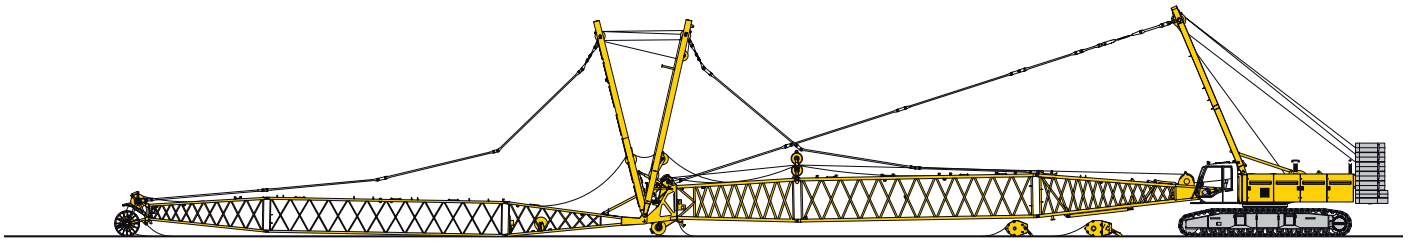

Reeving of hoist and luffing jib ropes

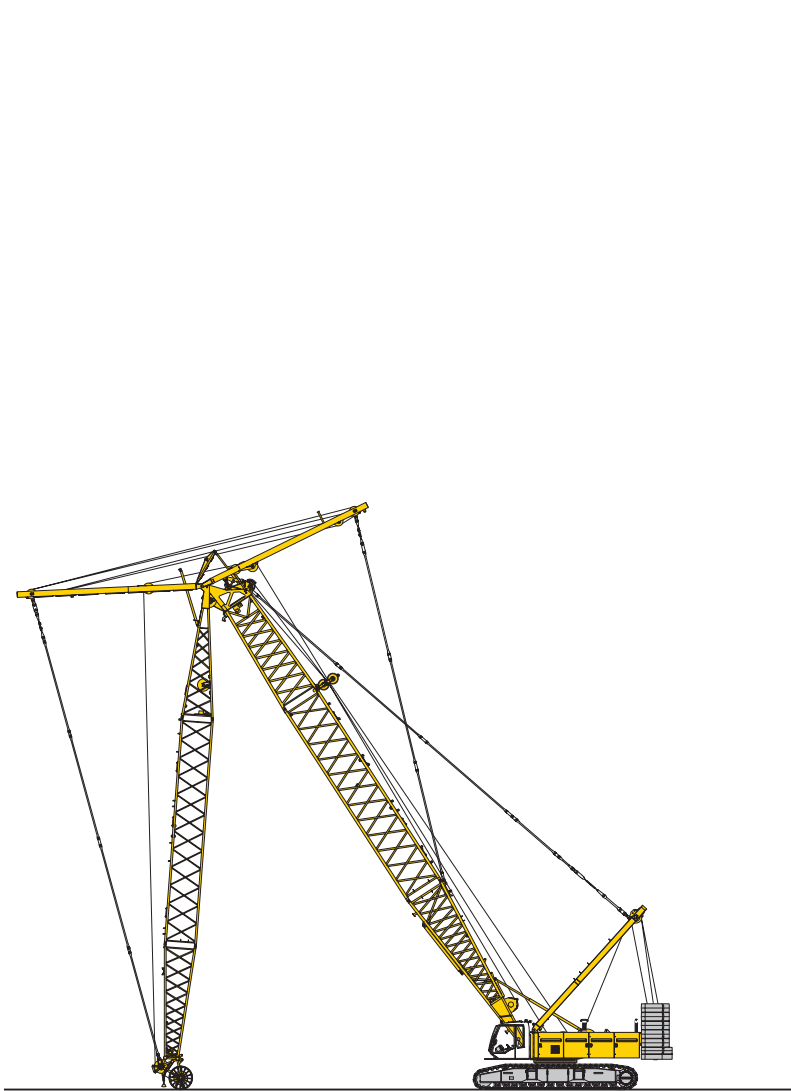


Erecting of main boom and luffing jib

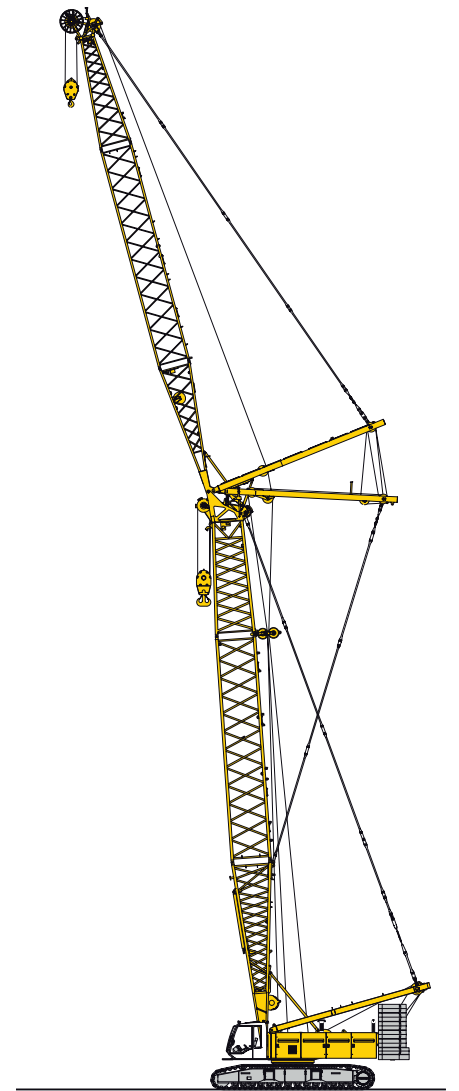


Working position

Main boom 86° - 15° (No. 2320.xx)

82.3 t counterweight and 36 t carbody counterweight

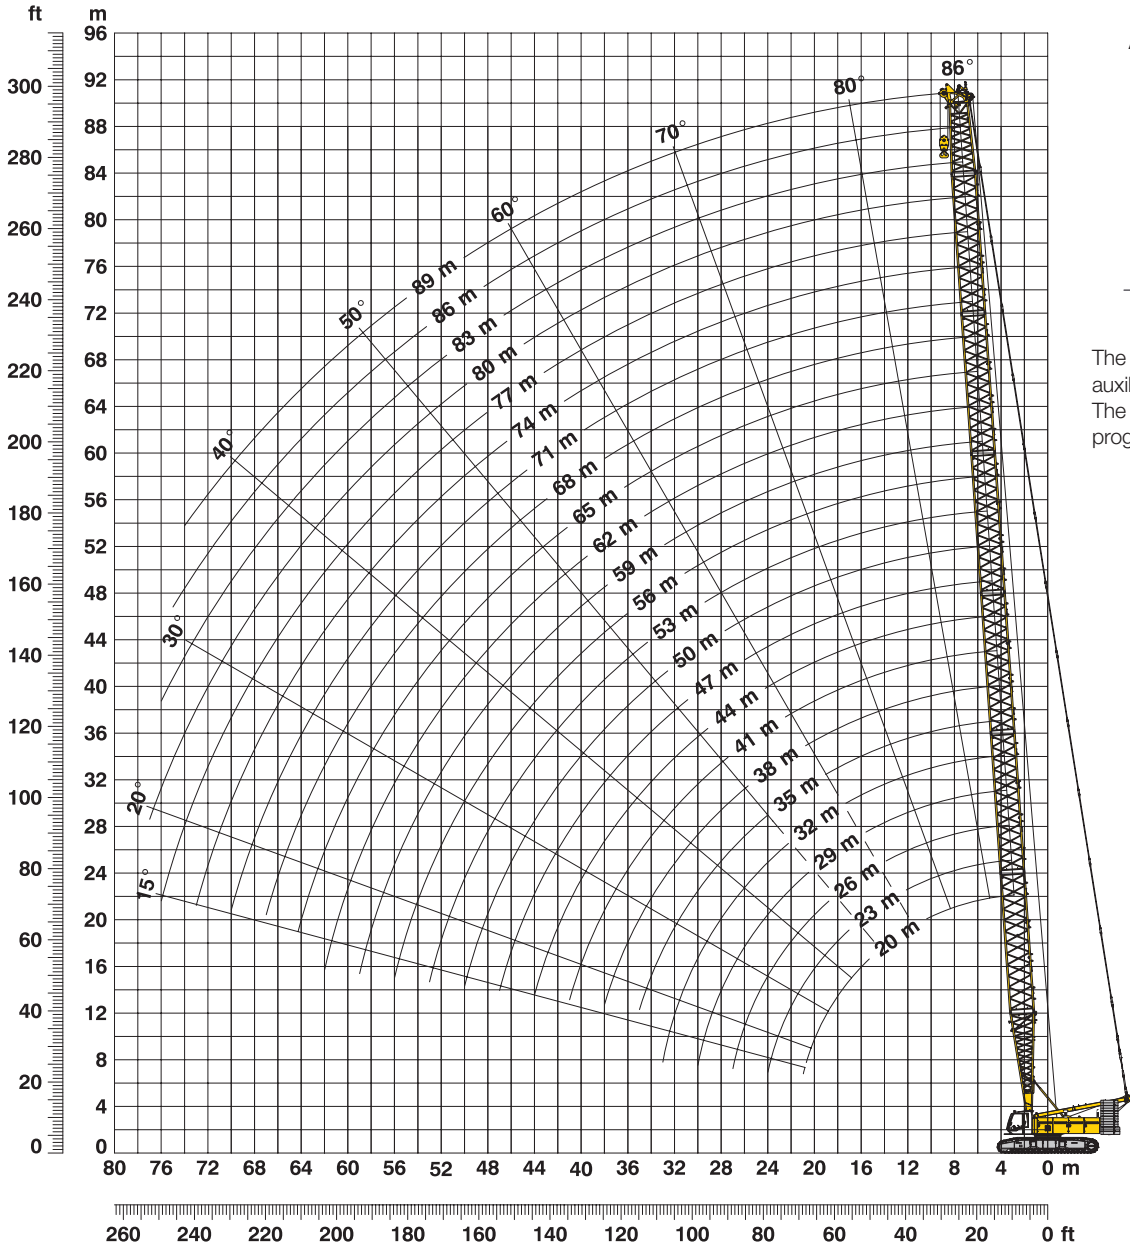

Auxiliary jib 24 t



The maximum capacity of the auxiliary jib is 24 t.
The corresponding load chart is programmed in the LMI system.

Main boom configuration (Table 1 – No. 2320.xx) Configuration for boom lengths between 20 m and 89 m

| Boom foot | Length | Amount of boom extensions | | | | | | | | | | | | | | | | | | | | | | | | |
|-----------------|--------|---------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|
| | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | |
| Boom foot | 10 m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | |
| Boom insert | 3 m | 1 | | 1 | | 1 | | 1 | | 1 | | 1 | | 1 | | 1 | | 1 | | 1 | | 1 | | | | |
| Boom insert | 6 m | | 1 | 1 | | 1 | 1 | | 1 | 1 | | 1 | 1 | | 1 | 1 | | 1 | 1 | | 1 | 1 | | | | |
| Boom insert | 12 m | | | | 1 | 1 | 1 | 1 | | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 4 | 4 | 4 | 4 | 5 | 5 | 5 | 5 | 6 |
| Boom head | 7 m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | |
| Boom length (m) | | 20 | 23 | 26 | 29 | 32 | 35 | 38 | 41 | 44 | 47 | 50 | 53 | 56 | 59 | 62 | 65 | 68 | 71 | 74 | 77 | 80 | 83 | 86 | 89 | |

Lift chart for main boom (No. 2320.xx)

82.3 t counterweight and 36 t carbody counterweight

TLT 10576478 - M00000 Offiziell

Capacities in metric tonnes for boom lengths (20 m - 89 m) – with 120 kN winches

| Radius (m) | Boom length in (m) | | | | | | | | | | | | | Radius (m) |
|---------------|--------------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------------|
| | 20 t | 26 t | 32 t | 38 t | 44 t | 50 t | 56 t | 62 t | 68 t | 74 t | 80 t | 86 t | 89 t | |
| 6 | | | | | 114.8 | | | | | | | | | 6 |
| 7 | | | | 129.5 | 107.8 | 90.1 | 80.3 | 65.4 | | | | | | 7 |
| 8 | | 140.8 | 132.2 | 118.8 | 100.9 | 83.7 | 77.6 | 64.9 | 52.1 | 45.0 | | | | 8 |
| 9 | 128.6 | 122.5 | 115.7 | 109.5 | 93.2 | 78.8 | 74.8 | 62.1 | 50.3 | 44.7 | 37.0 | 30.2 | 26.6 | 9 |
| 10 | 113.8 | 108.2 | 102.8 | 97.7 | 87.2 | 73.6 | 71.9 | 60.2 | 48.3 | 43.1 | 36.0 | 30.0 | 26.6 | 10 |
| 12 | 87.2 | 87.2 | 83.7 | 80.0 | 76.7 | 66.3 | 66.8 | 55.6 | 44.6 | 40.7 | 34.0 | 28.2 | 25.2 | 12 |
| 14 | 70.2 | 70.3 | 70.3 | 67.5 | 65.0 | 59.2 | 60.2 | 52.3 | 41.4 | 38.1 | 31.7 | 26.6 | 24.0 | 14 |
| 16 | 58.5 | 58.5 | 58.5 | 58.2 | 56.1 | 53.7 | 52.2 | 48.5 | 38.8 | 36.2 | 29.9 | 25.0 | 22.5 | 16 |
| 18 | 49.9 | 49.9 | 49.9 | 49.7 | 49.2 | 47.5 | 45.9 | 44.3 | 36.0 | 34.3 | 28.5 | 23.7 | 21.3 | 18 |
| 20 | 43.2 | 43.3 | 43.3 | 43.1 | 42.9 | 42.2 | 40.8 | 39.4 | 33.7 | 32.6 | 27.0 | 22.6 | 20.4 | 20 |
| 26 | | 30.3 | 30.4 | 30.2 | 30.0 | 29.6 | 29.4 | 29.0 | 28.0 | 27.0 | 23.5 | 19.9 | 17.7 | 26 |
| 32 | | | 22.7 | 22.6 | 22.4 | 22.0 | 21.8 | 21.4 | 21.1 | 20.6 | 19.8 | 17.6 | 16.1 | 32 |
| 38 | | | | 17.5 | 17.3 | 17.0 | 16.8 | 16.4 | 16.1 | 15.7 | 15.3 | 14.5 | 14.1 | 38 |
| 44 | | | | | 13.7 | 13.5 | 13.2 | 12.8 | 12.5 | 12.1 | 11.8 | 11.3 | 11.0 | 44 |
| 50 | | | | | | 10.8 | 10.6 | 10.2 | 9.9 | 9.5 | 9.2 | 8.8 | 8.6 | 50 |
| 55 | | | | | | | 8.8 | 8.5 | 8.2 | 7.8 | 7.4 | 7.0 | 6.9 | 55 |
| 60 | | | | | | | | 7.0 | 6.7 | 6.3 | 6.0 | 5.6 | 5.4 | 60 |
| 65 | | | | | | | | | 5.4 | 5.1 | 4.7 | 4.3 | 4.2 | 65 |
| 70 | | | | | | | | | | 4.0 | 3.7 | 3.3 | 3.2 | 70 |
| 75 | | | | | | | | | | | 2.8 | 2.4 | 2.3 | 75 |

72.3 t counterweight and 36 t carbody counterweight

TLT 10576478 - M00000 Offiziell


Capacities in metric tonnes for boom lengths (20 m - 89 m) – with 120 kN winches

| Radius (m) | Boom length (m) | | | | | | | | | | | | | Radius (m) |
|---------------|-----------------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------|---------------|
| | 20 t | 26 t | 32 t | 38 t | 44 t | 50 t | 56 t | 62 t | 68 t | 74 t | 80 t | 86 t | 89 t | |
| 4.1 | 220.0 | | | | | | | | | | | | | 4.1 |
| 5 | 217.0 | 162.8 | 153.6 | | | | | | | | | | | 5 |
| 6 | 185.8 | 159.0 | 150.7 | 140.3 | 114.8 | | | | | | | | | 6 |
| 7 | 162.1 | 152.1 | 141.4 | 129.5 | 107.8 | 90.1 | 80.3 | 65.4 | | | | | | 7 |
| 8 | 138.5 | 129.4 | 121.4 | 114.2 | 100.9 | 83.7 | 77.6 | 64.9 | 52.1 | 45.0 | | | | 8 |
| 9 | 119.4 | 112.4 | 106.2 | 100.5 | 93.2 | 78.8 | 74.8 | 62.1 | 50.3 | 44.7 | 37.0 | 30.2 | 26.6 | 9 |
| 10 | 104.4 | 99.2 | 94.2 | 89.5 | 85.3 | 73.6 | 71.9 | 60.2 | 48.3 | 43.1 | 36.0 | 30.0 | 26.6 | 10 |
| 12 | 79.9 | 79.9 | 76.7 | 73.3 | 70.2 | 66.3 | 64.5 | 55.6 | 44.6 | 40.7 | 34.0 | 28.2 | 25.2 | 12 |
| 14 | 64.3 | 64.3 | 64.3 | 61.7 | 59.4 | 57.0 | 54.9 | 52.3 | 41.4 | 38.1 | 31.7 | 26.6 | 24.0 | 14 |
| 16 | 53.4 | 53.5 | 53.4 | 53.1 | 51.2 | 49.3 | 47.5 | 45.8 | 38.8 | 36.2 | 29.9 | 25.0 | 22.5 | 16 |
| 18 | 45.5 | 45.5 | 45.5 | 45.3 | 44.9 | 43.2 | 41.7 | 40.2 | 36.0 | 34.3 | 28.5 | 23.7 | 21.3 | 18 |
| 20 | 39.3 | 39.5 | 39.4 | 39.2 | 39.0 | 38.3 | 37.0 | 35.7 | 33.7 | 32.6 | 27.0 | 22.6 | 20.4 | 20 |
| 26 | | 27.4 | 27.5 | 27.3 | 27.1 | 26.8 | 26.5 | 26.1 | 25.1 | 24.2 | 23.2 | 19.9 | 17.7 | 26 |
| 32 | | | 20.4 | 20.3 | 20.1 | 19.8 | 19.5 | 19.1 | 18.8 | 18.3 | 17.5 | 16.5 | 16.1 | 32 |
| 38 | | | | 15.6 | 15.5 | 15.2 | 14.9 | 14.5 | 14.2 | 13.8 | 13.3 | 12.5 | 12.1 | 38 |
| 44 | | | | | 12.1 | 11.9 | 11.7 | 11.3 | 11.0 | 10.6 | 10.3 | 9.6 | 9.3 | 44 |
| 50 | | | | | | 9.4 | 9.2 | 8.8 | 8.5 | 8.1 | 7.8 | 7.4 | 7.1 | 50 |
| 55 | | | | | | | 7.5 | 7.2 | 6.9 | 6.5 | 6.2 | 5.8 | 5.6 | 55 |
| 60 | | | | | | | | 5.8 | 5.5 | 5.2 | 4.8 | 4.4 | 4.3 | 60 |
| 65 | | | | | | | | | 4.4 | 4.0 | 3.7 | 3.3 | 3.1 | 65 |
| 70 | | | | | | | | | | 3.0 | 2.7 | 2.3 | 2.2 | 70 |

Above lift chart is for reference only. For actual lift duty please refer to lift chart in operator's cab or manual.

L-boom high reach 66 m - 117 m (No. 2320/1916.xx)

Working range 86° – 15°

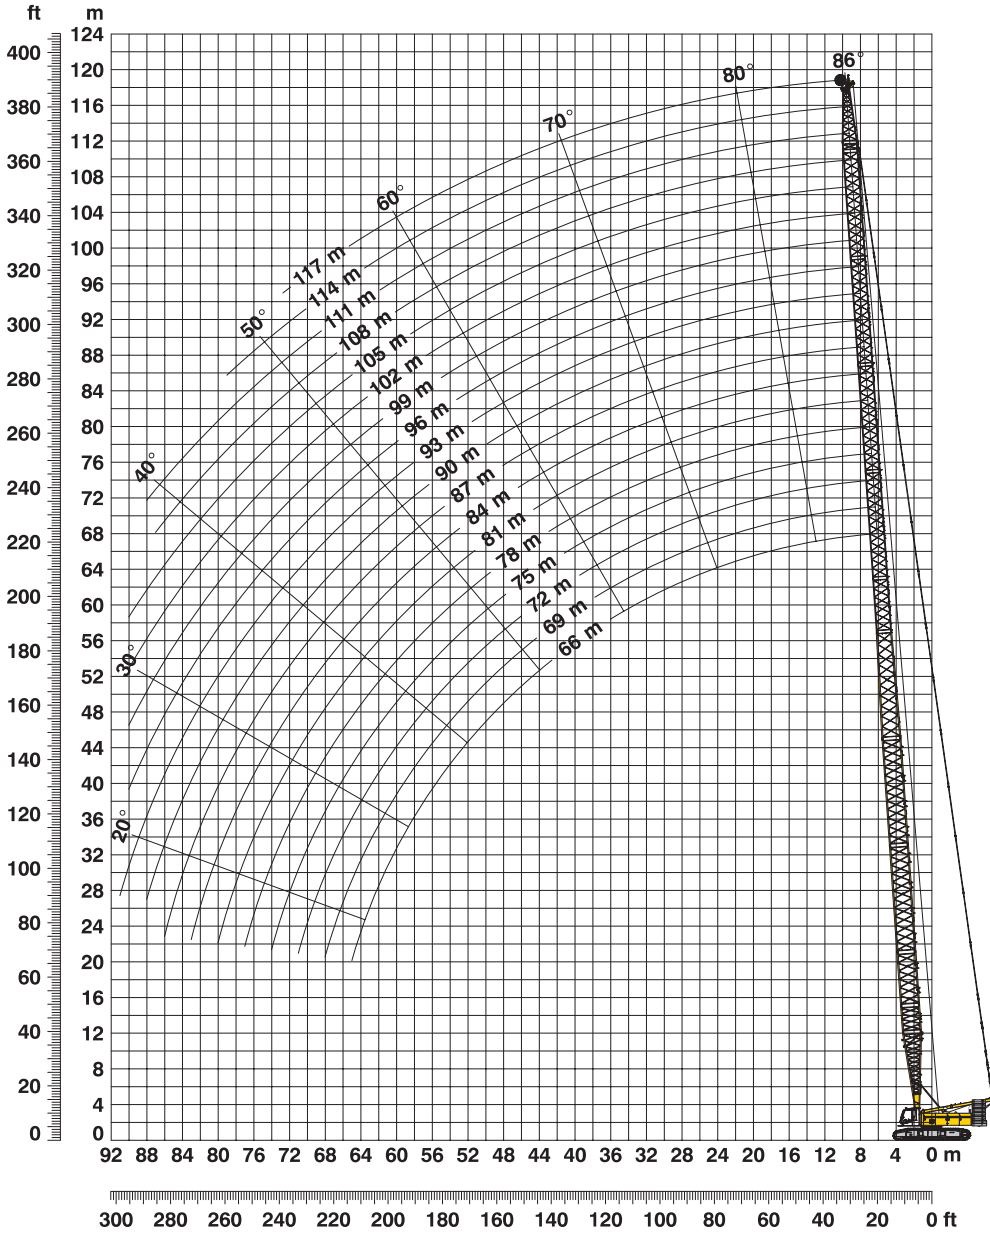

L-boom configuration with 43 m main boom (No. 2320.xx/1916.xx)

Configuration for L-boom lengths between 66 m and 117 m

| | Length | Amount of boom and luffing jib extensions | | | | | | | | | | | | | | | | | |
|------------------------|--------|---|----|----|----|----|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|-----|
| | | 66 | 69 | 72 | 75 | 78 | 81 | 84 | 87 | 90 | 93 | 96 | 99 | 102 | 105 | 108 | 111 | 114 | 117 |
| Boom foot | 10m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Boom insert | 3 m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Boom insert | 6 m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Boom insert | 12 m | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 | 2 |
| Tapered | 12 m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Luffing insert | 3 m | | | 1 | | 1 | | 1 | | | 1 | | 1 | | 1 | | 1 | | 1 |
| Luffing insert | 6 m | | 1 | 1 | | | 1 | 1 | | | 1 | 1 | | | 1 | 1 | | | 1 |
| Luffing insert | 12 m | | | | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 4 | 4 | 4 |
| Luffing jib head | 8 m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Max. L-boom length (m) | | 66 | 69 | 72 | 75 | 78 | 81 | 84 | 87 | 90 | 93 | 96 | 99 | 102 | 105 | 108 | 111 | 114 | 117 |

Lift chart for L-boom high reach (No. 2320/1916.xx)

82.3 t counterweight and 36 t carbody counterweight

TLT 10576478 - M00000 Offiziell

Main boom length 43 m

| Radius (m) | Boom length in (m) | | | | | |
|---------------|--------------------|---------|---------|---------|----------|----------|
| | 66 t | 75 t | 90 t | 99 t | 108 t | 117 t |
| 8.9 | 52.6 | | | | | |
| 10 | 51.6 | 36.7 | | | | |
| 12 | 48.0 | 34.0 | 22.0 | | | |
| 14 | 43.8 | 31.7 | 20.5 | 14.9 | 11.5 | |
| 16 | 39.3 | 29.5 | 19.1 | 13.8 | 10.9 | 8.2 |
| 18 | 35.3 | 27.8 | 17.9 | 12.9 | 10.1 | 7.7 |
| 20 | 31.7 | 26.1 | 16.7 | 12.1 | 9.5 | 7.2 |
| 22 | 29.2 | 24.5 | 15.9 | 11.3 | 8.9 | 6.8 |
| 24 | 26.6 | 23.4 | 14.9 | 10.8 | 8.3 | 6.4 |
| 26 | 24.5 | 21.7 | 14.2 | 10.2 | 8.0 | 6.0 |
| 28 | 22.9 | 20.3 | 13.6 | 9.8 | 7.6 | 5.7 |
| 30 | 21.0 | 19.1 | 13.0 | 9.4 | 7.3 | 5.5 |
| 32 | 19.5 | 18.0 | 12.5 | 9.1 | 7.0 | 5.2 |
| 34 | 18.3 | 16.8 | 12.0 | 8.7 | 6.8 | 5.0 |
| 36 | 17.2 | 15.8 | 11.7 | 8.4 | 6.5 | 4.9 |
| 38 | 16.3 | 14.9 | 11.3 | 8.1 | 6.2 | 4.7 |
| 40 | 15.5 | 14.2 | 10.9 | 7.9 | 6.0 | 4.5 |
| 42 | 14.8 | 13.3 | 10.6 | 7.6 | 5.8 | 4.3 |
| 44 | 14.1 | 12.6 | 10.3 | 7.3 | 5.7 | 4.1 |
| 46 | 13.2 | 12.0 | 10.0 | 7.0 | 5.4 | 4.0 |
| 48 | 12.5 | 11.5 | 9.7 | 6.8 | 5.2 | 3.9 |
| 50 | 11.9 | 11.0 | 9.3 | 6.6 | 5.0 | 3.7 |
| 55 | 10.3 | 9.7 | 8.4 | 6.0 | 4.7 | 3.4 |
| 60 | 8.9 | 8.7 | 7.6 | 5.4 | 4.2 | 3.1 |
| 65 | 7.6 | 7.6 | 6.6 | 5.0 | 3.8 | 2.7 |
| 70 | | 6.5 | 5.9 | 4.5 | 3.5 | 2.4 |
| 75 | | | 5.0 | 4.1 | 3.2 | 2.2 |
| 80 | | | 4.4 | 3.6 | 3.0 | |
| 85 | | | 3.7 | 3.2 | 2.7 | |
| 90 | | | | 2.8 | 2.1 | |
| 95 | | | | 2.3 | | |

Main boom length 55 m

| Radius (m) | Boom length in (m) | | | | | |
|---------------|--------------------|---------|---------|----------|----------|----------|
| | 78 t | 90 t | 96 t | 102 t | 108 t | 114 t |
| 10.2 | 37.8 | | | | | |
| 12 | 35.6 | 24.8 | | | | |
| 14 | 33.0 | 23.3 | 20.7 | 16.7 | 13.9 | |
| 16 | 30.9 | 21.9 | 19.4 | 15.6 | 13.1 | 10.9 |
| 18 | 29.0 | 20.6 | 18.5 | 14.6 | 12.2 | 10.2 |
| 20 | 27.3 | 19.5 | 17.4 | 13.8 | 11.6 | 9.6 |
| 22 | 25.4 | 18.6 | 16.6 | 13.0 | 10.9 | 9.1 |
| 24 | 23.9 | 17.8 | 15.9 | 12.3 | 10.3 | 8.6 |
| 26 | 22.3 | 17.1 | 15.3 | 11.8 | 9.9 | 8.2 |
| 28 | 20.4 | 16.5 | 14.8 | 11.3 | 9.5 | 7.9 |
| 30 | 18.8 | 15.8 | 14.4 | 10.9 | 9.1 | 7.5 |
| 32 | 17.6 | 14.9 | 13.8 | 10.6 | 8.8 | 7.2 |
| 34 | 16.3 | 14.2 | 13.1 | 10.2 | 8.6 | 7.0 |
| 36 | 15.1 | 13.6 | 12.5 | 9.8 | 8.2 | 6.8 |
| 38 | 14.0 | 12.9 | 12.0 | 9.5 | 7.9 | 6.6 |
| 40 | 13.2 | 12.0 | 11.5 | 9.3 | 7.7 | 6.3 |
| 42 | 12.6 | 11.2 | 10.7 | 9.0 | 7.4 | 6.1 |
| 44 | 12.0 | 10.5 | 10.0 | 8.5 | 7.3 | 5.9 |
| 46 | 11.5 | 9.9 | 9.3 | 8.1 | 7.0 | 5.8 |
| 48 | 11.0 | 9.4 | 8.8 | 7.7 | 6.7 | 5.6 |
| 50 | 10.6 | 9.0 | 8.3 | 7.4 | 6.4 | 5.4 |
| 55 | 9.1 | 8.1 | 7.4 | 6.6 | 5.9 | 5.1 |
| 60 | 8.0 | 7.2 | 6.7 | 5.9 | 5.2 | 4.7 |
| 65 | 6.8 | 6.2 | 5.8 | 5.3 | 4.6 | 4.1 |
| 70 | 5.9 | 5.4 | 5.0 | 4.5 | 4.1 | 3.7 |
| 75 | 5.0 | 4.6 | 4.3 | 3.8 | 3.4 | 3.2 |
| 80 | | 3.9 | 3.6 | 3.2 | 2.9 | 2.5 |
| 85 | | 3.3 | 3.1 | 2.6 | 2.4 | 2.0 |
| 90 | | | 2.5 | 2.2 | | |

Above lift chart is for reference only. For actual lift duty please refer to lift chart in operator's cab or manual.


L-boom configuration with 55 m main boom (No. 2320.xx/1916.xx)

Configuration for L-boom lengths between 78 m and 114 m

| | Länge | Amount of boom and luffing jib extensions | | | | | | | | | | | | |
|------------------------|-------|---|----|----|----|----|----|----|----|-----|-----|-----|-----|-----|
| | | 78 | 81 | 84 | 87 | 90 | 93 | 96 | 99 | 102 | 105 | 108 | 111 | 114 |
| Boom foot | 10m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Boom insert | 3m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Boom insert | 6m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Boom insert | 12m | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 | 3 |
| Tapered | 12m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Luffing insert | 3m | | | 1 | | | 1 | | | 1 | | | | 1 |
| Luffing insert | 6m | | 1 | 1 | | | | 1 | | | 1 | 1 | | |
| Luffing insert | 12m | | | | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 |
| Luffing jib head | 8m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Max. L-boom length (m) | | 78 | 81 | 84 | 87 | 90 | 93 | 96 | 99 | 102 | 105 | 108 | 111 | 114 |

Working range - luffing jib 78° - 15° (No. 1916.xx)

Main boom 88° - 45°

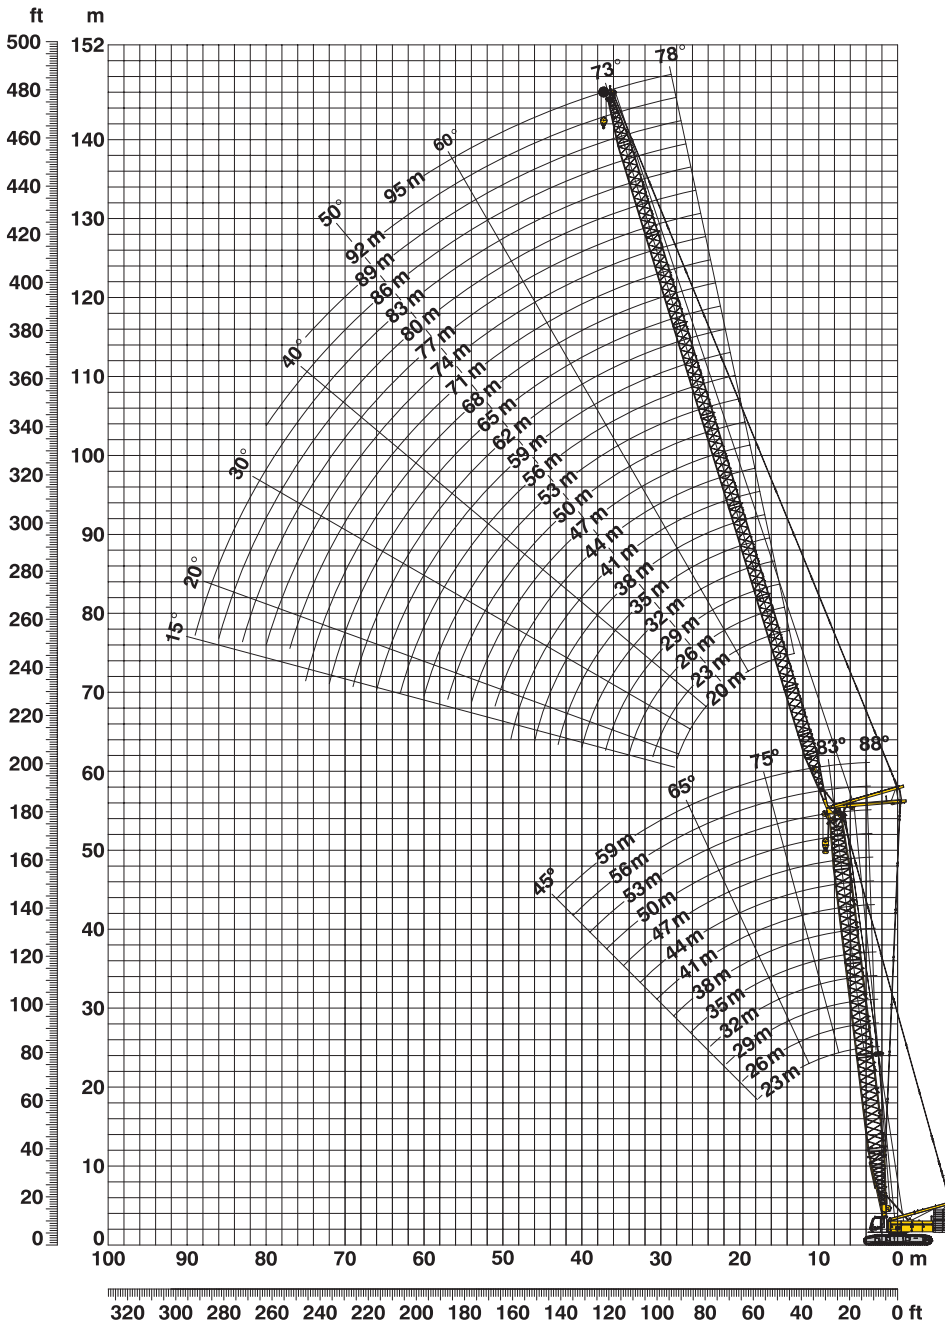

Boom configuration for main boom lengths (23 m – 59 m) (see table 1 on page 10)

Jib configuration for jib lengths (20 m – 95 m)

| Luffing jib foot | Length | Amount of luffing jib extensions | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|------------------------|--------|----------------------------------|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|----|---|---|
| | | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | |
| Luffing jib insert | 7 m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | | | | | | | | |
| Luffing jib insert | 3 m | | 1 | | 1 | | | 1 | 1 | | | | 1 | 1 | | | | 1 | 1 | | | | | | | | | | |
| Luffing jib insert | 6 m | 1 | 1 | | | 1 | 1 | | | | | 1 | 1 | | | | | 1 | 1 | | | | | | | | | | |
| Luffing jib insert | 12 m | | | | 1 | 1 | 1 | 1 | 1 | 2 | 2 | 2 | 2 | 3 | 3 | 3 | 3 | 4 | 4 | 4 | 4 | 5 | 5 | 5 | 5 | 6 | 6 | 6 | 6 |
| Luffing jib head | 7 m | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 | 1 |
| Luffing jib length (m) | | 20 | 23 | 26 | 29 | 32 | 35 | 38 | 41 | 44 | 47 | 50 | 53 | 56 | 59 | 62 | 65 | 68 | 71 | 74 | 77 | 80 | 83 | 86 | 89 | 92 | 95 | | |

Lift chart - luffing jib (No. 1916.xx)

Main boom 88°

TLT 10576478 - M00000 Offiziell

Main boom 23 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|------|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| (m) | t | t | t | t | t | t | t | t |
| 7.9 | 69.9 | | | | | | | |
| 10 | 57.2 | 52.0 | | | | | | |
| 13 | 44.4 | 40.9 | 36.0 | | | | | |
| 15 | 38.1 | 35.5 | 31.7 | 25.5 | | | | |
| 17 | 33.6 | 31.4 | 27.9 | 23.7 | 18.2 | | | |
| 19 | 29.8 | 27.9 | 25.1 | 21.7 | 17.6 | 12.9 | | |
| 22 | 25.8 | 24.0 | 21.5 | 18.9 | 16.1 | 12.4 | 8.4 | |
| 26 | | 20.2 | 18.3 | 16.2 | 14.1 | 11.7 | 8.1 | 5.1 |
| 30 | | 17.8 | 16.0 | 14.3 | 12.4 | 10.9 | 7.8 | 5.0 |
| 42 | | | 11.6 | 10.3 | 9.1 | 8.1 | 6.7 | 4.4 |
| 50 | | | | 8.6 | 7.5 | 6.8 | 5.5 | 4.0 |
| 60 | | | | | 6.1 | 5.3 | 4.3 | 3.1 |
| 65 | | | | | | 4.8 | 3.8 | 2.8 |
| 70 | | | | | | 4.3 | 3.3 | 2.3 |
| 75 | | | | | | | 2.9 | |
| 80 | | | | | | | 2.6 | |

Main boom 35 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|------|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| (m) | t | t | t | t | t | t | t | t |
| 8.3 | 65.1 | | | | | | | |
| 11 | 54.2 | 47.6 | | | | | | |
| 13 | 46.9 | 41.8 | 32.7 | | | | | |
| 16 | 38.9 | 35.2 | 29.6 | 21.6 | | | | |
| 18 | 35.0 | 32.0 | 27.0 | 20.9 | 15.5 | | | |
| 19 | 33.2 | 30.3 | 26.0 | 20.6 | 15.3 | 11.2 | | |
| 22 | 29.1 | 26.3 | 22.6 | 18.8 | 14.7 | 10.9 | 7.3 | |
| 26 | | 22.7 | 19.7 | 16.6 | 13.9 | 10.6 | 7.1 | 4.4 |
| 32 | | 12.1 | 16.7 | 14.3 | 12.5 | 10.1 | 7.0 | 4.4 |
| 42 | | | 13.2 | 11.5 | 10.3 | 8.8 | 6.4 | 4.1 |
| 46 | | | | 10.6 | 9.6 | 8.2 | 6.1 | 3.9 |
| 55 | | | | 8.6 | 8.1 | 7.0 | 5.5 | 3.4 |
| 60 | | | | | 7.3 | 6.3 | 5.0 | 3.1 |
| 70 | | | | | | 5.1 | 4.0 | 2.6 |
| 75 | | | | | | | 3.6 | 2.3 |
| 80 | | | | | | | 3.1 | 2.0 |

Main boom 44 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|-----|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| (m) | t | t | t | t | t | t | t | t |
| 8.7 | 50.1 | | | | | | | |
| 11 | 44.8 | 38.0 | | | | | | |
| 13 | 40.3 | 34.7 | 26.7 | | | | | |
| 16 | 34.7 | 30.4 | 24.5 | 18.4 | | | | |
| 18 | 31.8 | 28.2 | 22.7 | 17.6 | 13.3 | | | |
| 20 | 29.0 | 25.8 | 21.2 | 16.6 | 13.1 | 9.9 | | |
| 22 | 26.8 | 23.9 | 19.8 | 15.6 | 12.8 | 9.7 | 6.4 | |
| 26 | | 20.8 | 17.7 | 14.2 | 11.8 | 9.4 | 6.3 | 3.7 |
| 32 | | 17.6 | 15.3 | 12.7 | 10.8 | 8.9 | 6.3 | 3.7 |
| 36 | | | 13.8 | 11.8 | 10.2 | 8.5 | 6.1 | 3.7 |
| 44 | | | 11.3 | 10.0 | 8.9 | 7.5 | 5.6 | 3.5 |
| 48 | | | | 9.3 | 8.2 | 7.1 | 5.3 | 3.4 |
| 55 | | | | 7.6 | 7.1 | 6.1 | 4.8 | 3.0 |
| 60 | | | | | 6.4 | 5.5 | 4.4 | 2.7 |
| 70 | | | | | | 4.5 | 3.3 | 2.1 |
| 80 | | | | | | | 2.5 | |

Main boom 53 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|-----|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| (m) | t | t | t | t | t | t | t | t |
| 9 | 38.7 | | | | | | | |
| 11 | 35.3 | 29.5 | | | | | | |
| 14 | 30.7 | 26.1 | 20.6 | | | | | |
| 16 | 28.1 | 24.0 | 19.4 | 14.8 | | | | |
| 18 | 26.0 | 22.2 | 17.9 | 14.2 | 11.4 | | | |
| 20 | 24.0 | 20.5 | 16.7 | 13.4 | 11.1 | 8.4 | | |
| 24 | 12.1 | 18.1 | 14.6 | 11.9 | 10.1 | 8.1 | 5.3 | |
| 26 | | 17.2 | 13.9 | 11.4 | 9.7 | 7.9 | 5.3 | 3.1 |
| 32 | | 15.5 | 12.4 | 10.3 | 8.8 | 7.2 | 5.1 | 3.1 |
| 36 | | | 11.6 | 9.6 | 8.2 | 6.7 | 4.9 | 3.1 |
| 44 | | | 10.0 | 8.5 | 7.2 | 5.9 | 4.3 | 2.7 |
| 48 | | | | 8.0 | 6.8 | 5.5 | 4.0 | 2.5 |
| 55 | | | | 7.0 | 6.1 | 4.9 | 3.5 | 2.1 |
| 60 | | | | | 5.6 | 4.5 | 3.2 | |
| 70 | | | | | | 3.7 | 2.5 | |
| 75 | | | | | | | 2.2 | |

Main boom 56 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|------|-----|-----|
| | 20 | 29 | 35 | 41 | 53 | 62 | 71 | 80 |
| (m) | t | t | t | t | t | t | t | t |
| 9.1 | 37.2 | | | | | | | |
| 11 | 34.9 | 28.4 | | | | | | |
| 13 | 31.8 | 26.9 | 23.7 | | | | | |
| 14 | 30.6 | 25.7 | 22.9 | 20.0 | | | | |
| 16 | 28.1 | 23.8 | 21.4 | 18.8 | 14.4 | | | |
| 18 | 26.2 | 22.1 | 20.0 | 17.6 | 13.9 | 10.9 | | |
| 20 | 24.3 | 20.6 | 18.7 | 16.6 | 13.2 | 10.8 | 8.0 | |
| 22 | 22.9 | 19.2 | 17.7 | 15.5 | 12.4 | 10.5 | 7.9 | 5.9 |
| 24 | 12.1 | 18.2 | 16.7 | 14.7 | 11.8 | 10.0 | 7.8 | 5.8 |
| 32 | | 15.3 | 14.0 | 12.5 | 10.3 | 8.7 | 7.1 | 5.7 |
| 38 | | | 12.4 | 11.1 | 9.4 | 8.0 | 6.5 | 5.2 |
| 44 | | | | 9.7 | 8.3 | 7.3 | 5.9 | 4.8 |
| 55 | | | | | 6.8 | 5.9 | 4.9 | 4.0 |
| 60 | | | | | | 5.4 | 4.4 | 3.5 |
| 70 | | | | | | | 3.5 | 2.7 |
| 80 | | | | | | | | 2.0 |

Main boom 59 m

| Radius (m) | Jib length (m) | | | | | | |
|---------------|----------------|------|------|------|------|------|--|
| | 20 | 29 | 35 | 41 | 53 | 62 | |
| (m) | t | t | t | t | t | t | |
| 9.2 | 32.9 | | | | | | |
| 12 | 29.7 | 24.6 | | | | | |
| 13 | 28.3 | 23.7 | 20.9 | | | | |
| 14 | 27.1 | 22.8 | 20.1 | 17.9 | | | |
| 17 | 24.1 | 20.4 | 18.2 | 16.2 | 12.9 | | |
| 18 | 23.3 | 19.7 | 17.5 | 15.7 | 12.5 | 10.1 | |
| 20 | 21.6 | 18.4 | 16.2 | 14.8 | 11.8 | 9.9 | |
| 24 | 12.1 | 16.3 | 14.3 | 13.0 | 10.6 | 8.9 | |
| 28 | | 15.0 | 13.1 | 11.9 | 9.7 | 8.2 | |
| 32 | | 14.1 | 12.2 | 11.1 | 9.1 | 7.7 | |
| 38 | | | 11.2 | 10.1 | 8.2 | 7.0 | |
| 42 | | | | 9.5 | 7.7 | 6.5 | |
| 44 | | | | 8.9 | 7.5 | 6.3 | |
| 48 | | | | | 7.1 | 6.0 | |
| 55 | | | | | 6.3 | 5.4 | |
| 60 | | | | | | 4.9 | |

Capacities in metric tonnes with luffing jib (No. 1916.xx), 82.3 counterweight + 36 t carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

Lift chart - luffing jib (No. 1916.xx)

Main boom 83°

TLT 10576478 - M00000 Offiziell

Main boom 23 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|------|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| 11.7 | 57.6 | | | | | | | |
| 15 | 43.7 | 41.1 | | | | | | |
| 18 | 35.4 | 33.1 | 29.6 | | | | | |
| 22 | 28.1 | 26.3 | 24.0 | 21.2 | | | | |
| 24 | 25.5 | 24.0 | 21.8 | 19.3 | 15.9 | | | |
| 28 | | 20.3 | 18.6 | 16.6 | 14.6 | 11.8 | | |
| 32 | | 17.8 | 16.3 | 14.7 | 12.9 | 11.3 | 7.9 | |
| 34 | | | 15.2 | 13.7 | 12.3 | 10.7 | 7.7 | 5.0 |
| 44 | | | 11.6 | 10.4 | 9.4 | 8.4 | 6.9 | 4.5 |
| 48 | | | | 9.4 | 8.4 | 7.7 | 6.3 | 4.2 |
| 55 | | | | 8.1 | 7.1 | 6.5 | 5.4 | 3.8 |
| 60 | | | | | 6.4 | 5.7 | 4.8 | 3.4 |
| 65 | | | | | 5.7 | 5.1 | 4.1 | 3.1 |
| 70 | | | | | | 4.6 | 3.6 | 2.7 |
| 75 | | | | | | | 3.2 | 2.2 |
| 85 | | | | | | | 2.4 | |

Main boom 35 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|------|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| 13.1 | 55.3 | | | | | | | |
| 16 | 45.7 | 41.0 | | | | | | |
| 20 | 36.2 | 32.9 | 28.3 | | | | | |
| 24 | 29.8 | 27.3 | 23.8 | 19.3 | | | | |
| 26 | 27.7 | 25.4 | 22.1 | 18.6 | 14.3 | | | |
| 28 | | 23.7 | 20.8 | 17.8 | 14.1 | 10.6 | | |
| 32 | | 21.1 | 18.5 | 16.0 | 13.4 | 10.5 | 7.1 | |
| 34 | | 20.0 | 17.6 | 15.2 | 13.1 | 10.3 | 7.1 | |
| 36 | | | 16.6 | 14.4 | 12.8 | 10.1 | 7.0 | 4.4 |
| 40 | | | 15.1 | 13.2 | 11.8 | 9.8 | 6.7 | 4.3 |
| 46 | | | 13.2 | 11.5 | 10.6 | 9.0 | 6.4 | 4.1 |
| 50 | | | | 10.7 | 9.7 | 8.5 | 6.1 | 3.9 |
| 55 | | | | 9.7 | 8.8 | 7.8 | 5.8 | 3.6 |
| 65 | | | | | 7.4 | 6.5 | 5.1 | 3.1 |
| 75 | | | | | | 5.4 | 4.2 | 2.5 |
| 85 | | | | | | | 3.5 | 2.1 |

Main boom 44 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|-----|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| 14.2 | 40.8 | | | | | | | |
| 17 | 36.1 | 31.3 | | | | | | |
| 22 | 29.1 | 26.0 | 21.4 | | | | | |
| 24 | 27.0 | 24.1 | 20.1 | 15.7 | | | | |
| 26 | 25.7 | 22.8 | 19.1 | 15.3 | | | | |
| 28 | | 21.6 | 18.3 | 14.7 | 12.2 | | | |
| 30 | | 20.6 | 17.5 | 14.2 | 11.9 | 9.4 | | |
| 34 | | 19.0 | 16.3 | 13.3 | 11.3 | 9.2 | 6.2 | |
| 36 | | 12.1 | 15.6 | 12.8 | 11.0 | 9.1 | 6.2 | |
| 40 | | | 14.3 | 12.1 | 10.4 | 8.6 | 6.2 | 3.7 |
| 46 | | | 12.9 | 10.8 | 9.5 | 8.0 | 5.8 | 3.6 |
| 50 | | | | 10.1 | 8.9 | 7.6 | 5.5 | 3.5 |
| 55 | | | | 9.4 | 8.2 | 7.0 | 5.2 | 3.3 |
| 65 | | | | | 7.0 | 6.0 | 4.5 | 2.8 |
| 75 | | | | | | 5.1 | 3.8 | 2.3 |
| 85 | | | | | | | 3.1 | |

Main boom 53 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|-----|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| 9 | 38.7 | | | | | | | |
| 11 | 35.3 | 29.5 | | | | | | |
| 14 | 30.7 | 26.1 | 20.6 | | | | | |
| 16 | 28.1 | 24.0 | 19.4 | 14.8 | | | | |
| 18 | 26.0 | 22.2 | 17.9 | 14.2 | 11.4 | | | |
| 20 | 24.0 | 20.5 | 16.7 | 13.4 | 11.1 | 8.4 | | |
| 24 | 12.1 | 18.1 | 14.6 | 11.9 | 10.1 | 8.1 | 5.3 | |
| 26 | | 17.2 | 13.9 | 11.4 | 9.7 | 7.9 | 5.3 | 3.1 |
| 32 | | 15.5 | 12.4 | 10.3 | 8.8 | 7.2 | 5.1 | 3.1 |
| 36 | | | 11.6 | 9.6 | 8.2 | 6.7 | 4.9 | 3.1 |
| 44 | | | 10.0 | 8.5 | 7.2 | 5.9 | 4.3 | 2.7 |
| 48 | | | | 8.0 | 6.8 | 5.5 | 4.0 | 2.5 |
| 55 | | | | 7.0 | 6.1 | 4.9 | 3.5 | 2.1 |
| 60 | | | | | 5.6 | 4.5 | 3.2 | |
| 70 | | | | | | 3.7 | 2.5 | |
| 75 | | | | | | | 2.2 | |

Main boom 56 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|-----|-----|-----|
| | 20 | 29 | 35 | 41 | 53 | 62 | 71 | 80 |
| 15.7 | 31.4 | | | | | | | |
| 19 | 27.8 | 23.6 | | | | | | |
| 22 | 24.9 | 21.2 | 19.2 | 16.6 | | | | |
| 26 | 22.3 | 19.0 | 17.3 | 15.2 | 12.1 | | | |
| 28 | 21.3 | 18.2 | 16.6 | 14.6 | 11.8 | 9.8 | | |
| 32 | | 16.8 | 15.5 | 13.6 | 11.1 | 9.4 | 7.6 | |
| 34 | | 16.3 | 14.9 | 13.2 | 10.8 | 9.2 | 7.5 | 5.6 |
| 36 | | 15.7 | 14.4 | 12.8 | 10.5 | 8.9 | 7.3 | 5.6 |
| 40 | | | 13.5 | 11.9 | 9.9 | 8.5 | 6.9 | 5.6 |
| 42 | | | 13.0 | 11.5 | 9.7 | 8.3 | 6.7 | 5.4 |
| 48 | | | | 10.5 | 8.8 | 7.6 | 6.2 | 5.0 |
| 55 | | | | | 8.0 | 6.8 | 5.6 | 4.5 |
| 60 | | | | | 7.4 | 6.3 | 5.2 | 4.2 |
| 65 | | | | | | 5.9 | 4.8 | 3.8 |
| 75 | | | | | | | 4.1 | 3.2 |
| 85 | | | | | | | | 2.6 |

Main boom 59 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|-----|--|--|
| | 20 | 29 | 35 | 41 | 53 | 62 | | |
| 16 | 27.4 | | | | | | | |
| 19 | 24.6 | 20.9 | | | | | | |
| 22 | 21.9 | 18.8 | 16.8 | | | | | |
| 24 | 20.7 | 17.7 | 15.7 | 14.2 | | | | |
| 26 | 19.6 | 16.8 | 14.9 | 13.6 | 10.9 | | | |
| 28 | 18.9 | 16.1 | 14.2 | 13.0 | 10.6 | | | |
| 30 | | 15.5 | 13.6 | 12.6 | 10.3 | 8.7 | | |
| 34 | | 14.5 | 12.7 | 11.7 | 9.7 | 8.2 | | |
| 38 | | 12.1 | 12.0 | 10.9 | 9.0 | 7.7 | | |
| 42 | | | 11.4 | 10.3 | 8.5 | 7.2 | | |
| 46 | | | | 9.8 | 8.0 | 6.8 | | |
| 48 | | | | 9.5 | 7.7 | 6.6 | | |
| 55 | | | | | 7.1 | 5.9 | | |
| 60 | | | | | 6.6 | 5.5 | | |
| 65 | | | | | | 5.1 | | |
| 70 | | | | | | 4.3 | | |

Capacities in metric tonnes with luffing jib (No. 1916.xx), 82.3 counterweight + 36 t carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

Lift chart - luffing jib (No. 1916.xx)

Main boom 75°

TLT 10576478 - M00000 Offiziell

Main boom 23 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|------|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| 17.4 | 24.0 | | | | | | | |
| 22 | 33.1 | 31.7 | | | | | | |
| 28 | 12.1 | 23.4 | 21.9 | | | | | |
| 32 | | 19.9 | 18.6 | 17.1 | | | | |
| 36 | | 17.4 | 16.2 | 15.0 | 13.6 | | | |
| 40 | | | 14.2 | 13.1 | 12.0 | 10.5 | | |
| 44 | | | 12.8 | 11.7 | 10.7 | 9.7 | 7.0 | |
| 48 | | | 11.4 | 10.5 | 9.6 | 8.8 | 6.7 | |
| 50 | | | | 9.9 | 9.1 | 8.3 | 6.6 | 4.3 |
| 55 | | | | 8.8 | 7.9 | 7.4 | 6.1 | 4.0 |
| 60 | | | | 6.9 | 7.1 | 6.4 | 5.5 | 3.7 |
| 65 | | | | | 6.3 | 5.7 | 4.9 | 3.3 |
| 70 | | | | | | 5.1 | 4.2 | 3.1 |
| 75 | | | | | | 4.5 | 3.7 | 2.6 |
| 80 | | | | | | | 3.2 | 2.3 |
| 85 | | | | | | | 2.8 | |

Main boom 35 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|-----|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| 20.5 | 24.0 | | | | | | | |
| 26 | 31.0 | 29.9 | | | | | | |
| 30 | 25.9 | 25.6 | 23.7 | | | | | |
| 36 | | 20.5 | 19.6 | 17.4 | | | | |
| 40 | | 12.1 | 17.5 | 15.7 | 13.1 | | | |
| 44 | | | 15.4 | 14.1 | 12.7 | 9.8 | | |
| 48 | | | 13.8 | 12.8 | 11.7 | 9.5 | 6.4 | |
| 50 | | | 13.0 | 12.2 | 11.3 | 9.3 | 6.3 | |
| 55 | | | | 10.9 | 10.2 | 8.9 | 6.1 | 3.8 |
| 60 | | | | 9.6 | 9.2 | 8.3 | 5.8 | 3.6 |
| 65 | | | | | 8.2 | 7.5 | 5.6 | 3.3 |
| 70 | | | | | 7.3 | 6.8 | 5.3 | 3.1 |
| 75 | | | | | | 6.0 | 4.9 | 2.8 |
| 80 | | | | | | 5.3 | 4.6 | 2.6 |
| 85 | | | | | | | 4.2 | 2.3 |
| 90 | | | | | | | 3.6 | 2.1 |

Main boom 44 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|-----|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| 22.8 | 24.0 | | | | | | | |
| 28 | 26.0 | 23.3 | | | | | | |
| 32 | 23.0 | 21.3 | 18.0 | | | | | |
| 38 | | 18.3 | 16.2 | 13.5 | | | | |
| 42 | | 16.0 | 15.2 | 12.7 | 10.8 | | | |
| 46 | | | 13.8 | 11.9 | 10.4 | 8.4 | | |
| 48 | | | 13.1 | 11.7 | 10.1 | 8.3 | | |
| 50 | | | 12.4 | 11.3 | 9.8 | 8.2 | 5.7 | |
| 55 | | | | 10.3 | 9.2 | 7.7 | 5.5 | 3.4 |
| 60 | | | | 9.1 | 8.5 | 7.4 | 5.3 | 3.3 |
| 65 | | | | 8.0 | 7.7 | 6.8 | 5.0 | 3.1 |
| 70 | | | | | 6.8 | 6.2 | 4.7 | 2.8 |
| 75 | | | | | | 5.5 | 4.4 | 2.6 |
| 80 | | | | | | 4.9 | 4.1 | 2.3 |
| 85 | | | | | | | 3.5 | 2.1 |
| 90 | | | | | | | 3.1 | |

Main boom 53 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|-----|-----|-----|-----|
| | 20 | 29 | 41 | 53 | 62 | 71 | 83 | 95 |
| 25.2 | 24.0 | | | | | | | |
| 30 | 21.6 | 18.6 | | | | | | |
| 34 | 20.0 | 17.1 | 13.8 | | | | | |
| 36 | 12.1 | 16.6 | 13.6 | | | | | |
| 40 | | 15.5 | 12.7 | 10.6 | | | | |
| 44 | | 14.3 | 11.9 | 10.1 | 8.6 | | | |
| 48 | | | 11.2 | 9.5 | 8.2 | 6.7 | | |
| 55 | | | 10.1 | 8.6 | 7.5 | 6.2 | 4.5 | |
| 60 | | | | 8.1 | 6.9 | 5.7 | 4.2 | 2.5 |
| 65 | | | | 7.4 | 6.4 | 5.3 | 3.9 | 2.4 |
| 70 | | | | | 6.0 | 4.9 | 3.6 | 2.1 |
| 75 | | | | | 5.4 | 4.6 | 3.3 | |
| 80 | | | | | | 4.1 | 3.0 | |
| 85 | | | | | | 3.6 | 2.8 | |
| 90 | | | | | | | 2.4 | |
| 95 | | | | | | | 2.0 | |

Main boom 56 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|------|------|------|------|-----|-----|-----|
| | 20 | 29 | 35 | 41 | 53 | 62 | 71 | 80 |
| 26 | 24.1 | | | | | | | |
| 30 | 21.9 | 18.8 | | | | | | |
| 34 | 19.3 | 17.7 | 16.2 | | | | | |
| 36 | 18.2 | 17.1 | 15.7 | 13.7 | | | | |
| 40 | | 15.4 | 14.7 | 12.9 | 10.6 | | | |
| 44 | | 13.9 | 13.3 | 12.3 | 10.2 | 8.4 | | |
| 48 | | | 12.0 | 11.5 | 9.7 | 8.3 | 6.5 | |
| 50 | | | 11.5 | 11.0 | 9.5 | 8.1 | 6.5 | |
| 55 | | | | 9.8 | 8.8 | 7.6 | 6.2 | 4.9 |
| 60 | | | | | 7.8 | 7.1 | 5.8 | 4.7 |
| 65 | | | | | 7.0 | 6.4 | 5.5 | 4.4 |
| 70 | | | | | | 5.7 | 4.9 | 4.1 |
| 75 | | | | | | 5.1 | 4.3 | 3.7 |
| 80 | | | | | | | 3.8 | 3.2 |
| 85 | | | | | | | 3.4 | 2.8 |
| 90 | | | | | | | | 2.4 |

Main boom 59 m

| Radius (m) | Jib length (m) | | | | | | |
|---------------|----------------|------|------|------|-----|-----|--|
| | 20 | 29 | 35 | 41 | 53 | 62 | |
| 26.7 | 20.4 | | | | | | |
| 32 | 19.2 | 16.3 | | | | | |
| 34 | 18.6 | 15.7 | 13.8 | | | | |
| 36 | 17.6 | 15.2 | 13.4 | 12.0 | | | |
| 38 | | 14.8 | 12.9 | 11.8 | | | |
| 40 | | 14.3 | 12.5 | 11.5 | | | |
| 42 | | 13.9 | 12.2 | 11.1 | 9.1 | | |
| 44 | | 13.4 | 11.8 | 10.8 | 8.9 | | |
| 46 | | 12.1 | 11.5 | 10.5 | 8.7 | 7.3 | |
| 48 | | | 11.3 | 10.2 | 8.4 | 7.2 | |
| 50 | | | 11.0 | 10.0 | 8.2 | 7.0 | |
| 55 | | | | 9.4 | 7.8 | 6.6 | |
| 60 | | | | | 7.3 | 6.2 | |
| 65 | | | | | 6.7 | 5.8 | |
| 70 | | | | | | 5.3 | |
| 75 | | | | | | 4.8 | |

Capacities in metric tonnes with luffing jib (No. 1916.xx), 82.3 counterweight + 36 t carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

Lift chart - luffing jib (No. 1916.xx)

Main boom 65°

TLT 10576478 - M00000 Offiziell

Main boom 23 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|---------|---------|---------|---------|---------|---------|---------|
| | 20 t | 29 t | 41 t | 53 t | 62 t | 71 t | 83 t | 95 t |
| 24.1 | 24.0 | | | | | | | |
| 30 | 25.7 | 25.4 | | | | | | |
| 32 | 12.1 | 23.5 | | | | | | |
| 38 | | 18.7 | 18.0 | | | | | |
| 40 | | 17.3 | 16.7 | | | | | |
| 44 | | | 14.5 | 13.9 | | | | |
| 50 | | | 12.2 | 11.5 | 10.6 | | | |
| 55 | | | | 9.9 | 9.3 | 8.3 | | |
| 60 | | | | 8.7 | 8.0 | 7.5 | | |
| 65 | | | | | 7.1 | 6.6 | 5.5 | |
| 70 | | | | | 6.2 | 5.8 | 5.1 | 3.3 |
| 75 | | | | | | 5.1 | 4.4 | 3.0 |
| 80 | | | | | | 4.5 | 3.9 | 2.7 |
| 85 | | | | | | | 3.4 | 2.4 |
| 90 | | | | | | | 2.8 | 2.2 |

Main boom 35 m

| Radius (m) | Jib length (m) | | | | | | | |
|---------------|----------------|---------|---------|---------|---------|---------|---------|---------|
| | 20 t | 29 t | 41 t | 53 t | 62 t | 71 t | 83 t | 95 t |
| 29.2 | 24.0 | | | | | | | |
| 32 | 21.9 | | | | | | | |
| 36 | 18.8 | 18.5 | | | | | | |
| 42 | | 15.2 | 14.6 | | | | | |
| 44 | | 14.3 | 13.7 | | | | | |
| 50 | | | 11.6 | 11.0 | | | | |
| 55 | | | 10.1 | 9.6 | 9.1 | | | |
| 60 | | | | 8.4 | 8.0 | 7.4 | | |
| 65 | | | | 7.4 | 7.0 | 6.5 | | |
| 70 | | | | | 6.2 | 5.7 | 4.8 | |
| 75 | | | | | 5.5 | 5.0 | 4.2 | 3.0 |
| 80 | | | | | | 4.3 | 3.7 | 2.8 |
| 85 | | | | | | 3.8 | 3.2 | 2.3 |
| 90 | | | | | | | 2.7 | |
| 95 | | | | | | | 2.3 | |

Main boom 44 m

| Radius (m) | Jib length (m) | | | | | | |
|---------------|----------------|---------|---------|---------|---------|---------|---------|
| | 20 t | 29 t | 41 t | 53 t | 62 t | 71 t | 83 t |
| 33 | 19.4 | | | | | | |
| 40 | 15.2 | 14.7 | | | | | |
| 46 | | 12.3 | 11.7 | | | | |
| 48 | | 11.6 | 11.0 | | | | |
| 55 | | | 9.1 | 8.4 | | | |
| 60 | | | 8.0 | 7.4 | 6.7 | | |
| 65 | | | | 6.5 | 5.9 | 5.2 | |
| 70 | | | | 5.7 | 5.3 | 4.5 | 3.6 |
| 75 | | | | | 4.7 | 3.9 | 3.0 |
| 80 | | | | | 4.1 | 3.4 | 2.6 |
| 85 | | | | | | 3.0 | 2.1 |
| 90 | | | | | | 2.5 | |

Main boom 53 m

| Radius (m) | Jib length (m) | | | | | |
|---------------|----------------|---------|---------|---------|---------|---------|
| | 20 t | 29 t | 41 t | 53 t | 62 t | 71 t |
| 36.8 | 15.0 | | | | | |
| 42 | 12.9 | 12.1 | | | | |
| 44 | 12.1 | 11.5 | | | | |
| 48 | | 10.3 | | | | |
| 50 | | 9.8 | 8.8 | | | |
| 55 | | | 7.8 | | | |
| 60 | | | 6.9 | 5.9 | | |
| 65 | | | 6.1 | 5.2 | 4.6 | |
| 70 | | | | 4.6 | 4.0 | 3.2 |
| 75 | | | | 4.1 | 3.5 | 2.7 |
| 80 | | | | | 3.0 | 2.3 |
| 85 | | | | | 2.6 | |

Main boom 56 m

| Radius (m) | Jib length (m) | | | | | | |
|---------------|----------------|---------|---------|---------|---------|---------|---------|
| | 20 t | 29 t | 35 t | 41 t | 53 t | 62 t | 71 t |
| 38.1 | 13.7 | | | | | | |
| 44 | 11.6 | 10.8 | | | | | |
| 46 | 10.9 | 10.2 | | | | | |
| 48 | | 9.7 | 9.1 | | | | |
| 55 | | | 7.6 | 7.2 | | | |
| 60 | | | 6.8 | 6.4 | 5.4 | | |
| 65 | | | | 5.6 | 4.7 | 4.1 | |
| 70 | | | | | 4.1 | 3.5 | 2.7 |
| 75 | | | | | 3.6 | 3.0 | 2.3 |
| 80 | | | | | | 2.6 | |
| 85 | | | | | | 2.2 | |

Main boom 59 m

| Radius (m) | Jib length (m) | | | | | |
|---------------|----------------|---------|---------|---------|---------|---------|
| | 20 t | 29 t | 35 t | 41 t | 53 t | 62 t |
| 39.4 | 12.4 | | | | | |
| 44 | 10.9 | | | | | |
| 46 | 10.4 | 9.5 | | | | |
| 48 | | 9.1 | 8.4 | | | |
| 50 | | 8.6 | 8.0 | | | |
| 55 | | 7.6 | 7.1 | 6.6 | | |
| 60 | | | 6.3 | 5.8 | 4.9 | |
| 65 | | | | 5.2 | 4.2 | 3.6 |
| 70 | | | | | 3.7 | 3.0 |
| 75 | | | | | 3.2 | 2.6 |
| 80 | | | | | | 2.2 |

Capacities in metric tonnes with luffing jib (No. 1916.xx), 82.3 counterweight + 36 t carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

Lift chart - luffing jib (No. 1916.xx)

Main boom 45°

TLT 10576478 - M00000 Offiziell

Main boom 23 m

| Radius (m) | Jib length (m) | | | | | | |
|---------------|----------------|---------|---------|---------|---------|---------|---------|
| | 20 t | 29 t | 41 t | 53 t | 62 t | 71 t | 83 t |
| 35.4 | 18.9 | | | | | | |
| 38 | 17.3 | | | | | | |
| 44 | | 14.0 | | | | | |
| 46 | | 13.2 | | | | | |
| 55 | | | 9.9 | | | | |
| 65 | | | | 7.2 | | | |
| 70 | | | | 6.3 | 5.9 | | |
| 75 | | | | | 5.2 | | |
| 80 | | | | | | 4.1 | |
| 85 | | | | | | 3.6 | |
| 90 | | | | | | | 2.6 |
| 95 | | | | | | | 2.1 |

Main boom 35 m

| Radius (m) | Jib length (m) | | | | | |
|---------------|----------------|---------|---------|---------|---------|--|
| | 20 t | 29 t | 41 t | 53 t | 62 t | |
| 43.8 | 12.0 | | | | | |
| 44 | 12.0 | | | | | |
| 46 | 11.3 | | | | | |
| 55 | | 8.4 | | | | |
| 60 | | | | | | |
| 65 | | | 6.0 | | | |
| 75 | | | | 4.0 | | |
| 80 | | | | | 3.1 | |
| 85 | | | | | 2.7 | |

Main boom 44 m

| Radius (m) | Jib length (m) | | | |
|---------------|----------------|---------|---------|---------|
| | 20 t | 29 t | 41 t | 53 t |
| 50.2 | 8.2 | | | |
| 60 | | 5.8 | | |
| 70 | | | 3.9 | |
| 80 | | | | 2.3 |

Main boom 53 m

| Radius (m) | Jib length (m) | |
|---------------|----------------|---------|
| | 20 t | 29 t |
| 56.6 | 5.2 | |
| 65 | | 3.6 |

Main boom 56 m

| Radius (m) | Jib length (m) | |
|---------------|----------------|---------|
| | 20 t | 29 t |
| 58.7 | 4.3 | |
| 60 | 4.1 | |
| 70 | | 2.5 |


Main boom 59 m

| Radius (m) | Jib length (m) | |
|---------------|----------------|--|
| | 20 t | |
| 60.8 | 3.4 | |

Capacities in metric tonnes with luffing jib (No. 1916.xx), 82.3 counterweight + 36 t carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

Working range - fixed jib 15° and 30° (No. 1008.xx)

Main boom 88° – 30°

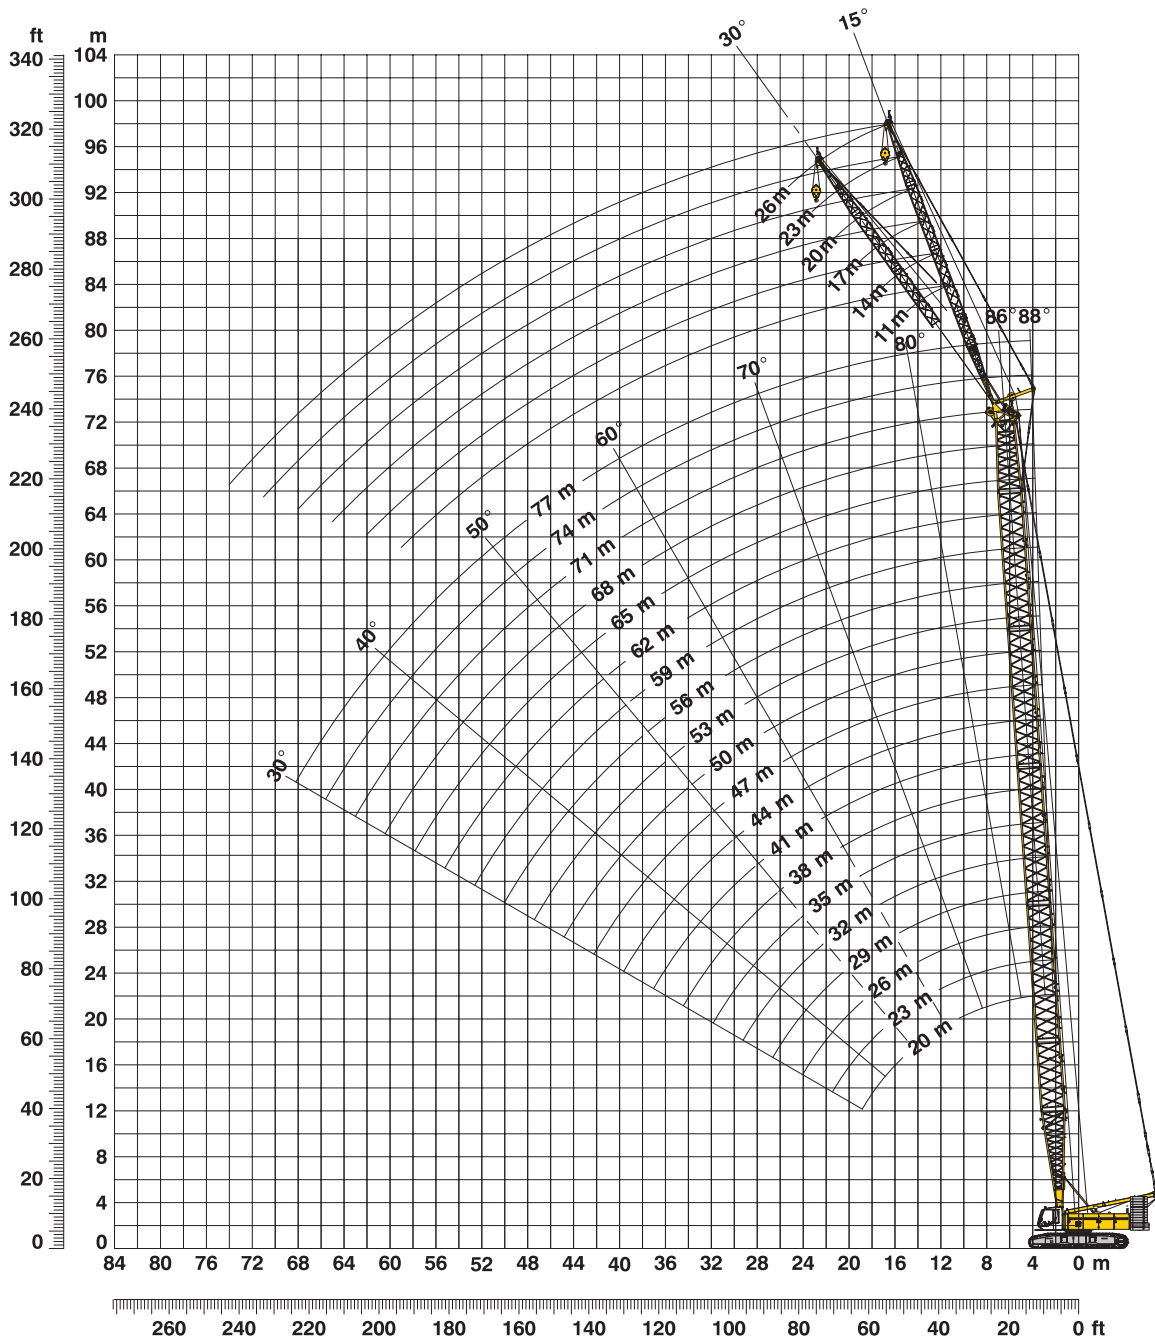

Boom configuration for boom lengths (20 m – 77 m) – see table 1 on Seite 10

Fixed jib configuration for fixed jib lengths (11 m – 26 m)

| | Length | Amount of fixed jib extensions | | | | | |
|----------------------|--------|--------------------------------|-----------|-----------|-----------|-----------|-----------|
| Fixed jib foot | 5.5 m | 1 | 1 | 1 | 1 | 1 | 1 |
| Fixed jib insert | 3.0 m | | 1 | | 1 | | 1 |
| Fixed jib insert | 6.0 m | | | 1 | 1 | 2 | 2 |
| Fixed jib head | 5.5 m | 1 | 1 | 1 | 1 | 1 | 1 |
| Fixed jib length (m) | | 11 | 14 | 17 | 20 | 23 | 26 |

Lift chart - fixed jib (No. 1008.xx)

Offset 15°

TLT 10576478 - M00000 Offiziell

Main boom 20 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 9 | 35.9 | 35.5 | | |
| 11 | 35.9 | 34.0 | 28.9 | |
| 12 | 35.9 | 33.2 | 27.7 | 19.8 |
| 14 | 35.9 | 31.5 | 25.5 | 18.3 |
| 16 | 35.1 | 29.9 | 23.9 | 17.1 |
| 20 | 32.8 | 26.5 | 20.0 | 15.1 |
| 24 | 27.5 | 23.2 | 17.0 | 13.4 |
| 28 | 24.0 | 20.7 | 14.8 | 11.7 |
| 30 | 23.0 | 19.5 | 13.8 | 11.1 |
| 32 | | 18.4 | 13.0 | 10.5 |
| 38 | | | 11.3 | 9.0 |
| 44 | | | | 7.9 |

Main boom 29 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 8 | 35.9 | | | |
| 9 | 35.9 | 34.9 | | |
| 10 | 35.9 | 34.2 | 28.3 | |
| 12 | 35.9 | 33.1 | 26.5 | 19.5 |
| 14 | 35.9 | 32.1 | 24.9 | 18.4 |
| 18 | 35.8 | 30.0 | 22.4 | 16.5 |
| 24 | 33.0 | 26.3 | 19.2 | 14.2 |
| 32 | 23.1 | 21.4 | 15.0 | 11.6 |
| 38 | 17.9 | 18.2 | 12.9 | 10.1 |
| 40 | | 16.9 | 12.4 | 9.7 |
| 46 | | | 11.2 | 8.7 |
| 50 | | | | 8.1 |

Main boom 38 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 6.3 | 35.9 | | | |
| 8 | 35.9 | 35.4 | | |
| 10 | 35.9 | 34.3 | 28.1 | |
| 13 | 35.9 | 33.0 | 26.0 | 18.6 |
| 18 | 35.9 | 31.3 | 22.9 | 16.5 |
| 24 | 33.4 | 29.0 | 20.1 | 14.6 |
| 32 | 22.5 | 22.8 | 16.8 | 12.6 |
| 40 | 16.0 | 16.3 | 14.1 | 10.7 |
| 46 | 12.7 | 13.0 | 12.7 | 9.5 |
| 48 | | 12.1 | 12.3 | 9.2 |
| 55 | | | 9.9 | 8.3 |
| 60 | | | | 7.8 |

Main boom 47 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 6.6 | 35.9 | | | |
| 8 | 35.9 | 34.4 | | |
| 11 | 35.9 | 33.2 | 26.2 | |
| 13 | 35.9 | 32.4 | 25.0 | 18.1 |
| 20 | 35.0 | 30.1 | 21.3 | 15.7 |
| 28 | 26.6 | 26.3 | 19.0 | 13.8 |
| 36 | 18.4 | 18.7 | 16.3 | 12.5 |
| 44 | 13.2 | 13.5 | 14.0 | 10.7 |
| 50 | 10.5 | 10.8 | 11.2 | 9.7 |
| 55 | | 8.9 | 9.4 | 9.0 |
| 60 | | | 7.8 | 8.2 |
| 65 | | | | 6.9 |

Main boom 56 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 6.9 | 35.9 | | | |
| 9 | 35.9 | 33.5 | | |
| 11 | 35.9 | 32.8 | 25.1 | |
| 13 | 35.9 | 32.0 | 24.2 | 17.2 |
| 18 | 33.3 | 29.5 | 22.0 | 15.8 |
| 24 | 29.7 | 26.7 | 19.8 | 14.3 |
| 32 | 21.4 | 21.8 | 18.1 | 13.2 |
| 40 | 15.0 | 15.2 | 15.7 | 12.1 |
| 48 | 10.8 | 11.0 | 11.5 | 10.6 |
| 60 | 6.6 | 6.9 | 7.3 | 7.7 |
| 70 | | | 4.9 | 5.2 |
| 75 | | | | 4.2 |

Main boom 62 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 7.1 | 35.9 | | | |
| 9 | 35.8 | 32.6 | | |
| 11 | 35.2 | 31.7 | 23.8 | |
| 13 | 33.5 | 30.4 | 23.2 | 16.5 |
| 20 | 27.8 | 25.8 | 20.3 | 14.8 |
| 28 | 24.1 | 22.4 | 17.9 | 13.4 |
| 36 | 17.4 | 17.7 | 16.6 | 12.7 |
| 44 | 12.3 | 12.5 | 13.1 | 11.6 |
| 55 | 7.7 | 8.0 | 8.4 | 8.8 |
| 65 | 5.0 | 5.2 | 5.6 | 6.0 |
| 75 | | | 3.5 | 3.8 |
| 80 | | | | 3.0 |

Main boom 68 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 7.3 | 34.1 | | | |
| 9 | 33.7 | 30.2 | | |
| 11 | 31.8 | 29.2 | 22.2 | |
| 14 | 28.3 | 26.7 | 21.4 | 15.7 |
| 18 | 24.7 | 23.8 | 19.6 | 14.8 |
| 24 | 21.1 | 20.3 | 17.5 | 13.6 |
| 32 | 18.7 | 18.0 | 15.7 | 12.6 |
| 40 | 14.2 | 14.5 | 14.3 | 11.9 |
| 48 | 10.0 | 10.3 | 10.8 | 10.7 |
| 65 | 4.6 | 4.8 | 5.2 | 5.6 |
| 75 | | 2.8 | 3.2 | 3.5 |
| 80 | | | 2.3 | 2.6 |

Main boom 74 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 23 |
| 7.6 | 29.0 | | | |
| 9 | 29.0 | 26.1 | | |
| 12 | 26.1 | 24.6 | 20.2 | |
| 13 | 25.0 | 24.0 | 20.1 | 17.2 |
| 16 | 22.7 | 21.6 | 18.7 | 16.5 |
| 20 | 19.9 | 19.2 | 17.0 | 15.4 |
| 28 | 16.9 | 16.3 | 14.9 | 14.0 |
| 36 | 15.1 | 14.9 | 13.6 | 12.8 |
| 44 | 11.5 | 11.7 | 12.0 | 11.6 |
| 55 | 7.0 | 7.2 | 7.7 | 7.9 |
| 75 | 2.2 | 2.4 | 2.8 | 3.0 |
| 80 | | | | 2.1 |

Main boom 77 m

| Radius (m) | Fixed jib length in (m) | | |
|---------------|-------------------------|------|------|
| | 11 | 14 | 17 |
| 7.7 | 26.7 | | |
| 9 | 26.7 | 23.8 | |
| 10 | 25.8 | 23.8 | 21.5 |
| 12 | 24.2 | 22.5 | 21.3 |
| 14 | 22.4 | 21.2 | 20.1 |
| 16 | 21.0 | 19.8 | 18.9 |
| 20 | 18.5 | 17.8 | 17.0 |
| 28 | 15.7 | 15.0 | 14.4 |
| 36 | 14.4 | 13.9 | 13.4 |
| 44 | 11.2 | 11.4 | 11.5 |
| 55 | 6.8 | 7.0 | 7.3 |
| 75 | 2.1 | 2.2 | 2.5 |

Capacities in metric tonnes with fixed jib (No. 1008.xx), 82.3 counterweight + 36 t carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

Lift chart - fixed jib (No. 1008.xx)

Offset 30°

TLT 10576478 - M00000 Offiziell

Main boom 20 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 11 | 34.8 | | | |
| 12 | 32.7 | 26.9 | | |
| 14 | 29.8 | 24.7 | 17.5 | |
| 18 | 25.1 | 21.6 | 15.1 | 12.1 |
| 20 | 23.4 | 20.1 | 14.0 | 11.3 |
| 24 | 21.5 | 17.6 | 12.3 | 9.8 |
| 26 | 20.3 | 16.7 | 11.7 | 9.2 |
| 28 | 19.6 | 15.9 | 11.2 | 8.7 |
| 30 | 19.0 | 15.2 | 10.8 | 8.3 |
| 34 | | 14.5 | 9.8 | 7.6 |
| 40 | | | 9.1 | 6.8 |
| 46 | | | | 6.4 |

Main boom 29 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 10 | 35.9 | | | |
| 12 | 34.6 | 27.8 | | |
| 14 | 31.8 | 26.0 | | |
| 15 | 30.7 | 25.0 | 17.3 | |
| 16 | 29.6 | 24.0 | 16.8 | |
| 18 | 27.5 | 23.5 | 15.6 | 12.0 |
| 24 | 23.2 | 19.5 | 13.1 | 10.2 |
| 32 | 20.2 | 16.2 | 11.1 | 8.5 |
| 38 | 18.0 | 14.9 | 10.0 | 7.6 |
| 44 | | | 9.4 | 7.0 |
| 46 | | | 9.3 | 6.8 |
| 50 | | | | 6.6 |

Main boom 38 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 17 | 20 | 26 |
| 8.9 | 35.9 | | | |
| 13 | 34.4 | 21.7 | | |
| 15 | 32.2 | 20.6 | 17.8 | |
| 19 | 28.6 | 18.2 | 15.9 | 12.1 |
| 24 | 25.3 | 16.0 | 14.0 | 10.5 |
| 32 | 22.3 | 13.7 | 12.0 | 8.9 |
| 40 | 16.2 | 12.2 | 10.7 | 7.8 |
| 44 | 13.8 | 11.8 | 10.1 | 7.4 |
| 46 | 12.8 | 11.7 | 9.9 | 7.2 |
| 50 | | 11.4 | 9.6 | 6.9 |
| 55 | | | 9.4 | 6.6 |
| 60 | | | | 6.5 |

Main boom 47 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 9.3 | 35.9 | | | |
| 12 | 35.7 | 28.0 | | |
| 15 | 33.6 | 26.4 | 17.1 | |
| 19 | 30.1 | 23.9 | 15.9 | 12.0 |
| 20 | 29.5 | 23.4 | 15.5 | 11.9 |
| 28 | 24.9 | 20.3 | 13.2 | 9.9 |
| 36 | 18.7 | 17.7 | 11.7 | 8.7 |
| 44 | 13.5 | 13.8 | 10.6 | 7.8 |
| 50 | 10.7 | 11.0 | 9.8 | 7.3 |
| 55 | | 9.0 | 9.5 | 6.9 |
| 60 | | | 8.0 | 6.7 |
| 65 | | | | 6.6 |

Main boom 56 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 17 | 20 | 26 |
| 9.6 | 35.5 | | | |
| 14 | 32.8 | 21.2 | | |
| 16 | 31.3 | 20.4 | 17.4 | |
| 19 | 29.1 | 19.1 | 16.5 | 11.7 |
| 24 | 26.6 | 17.2 | 14.8 | 10.8 |
| 32 | 21.9 | 15.0 | 13.0 | 9.5 |
| 40 | 15.3 | 13.5 | 11.7 | 8.5 |
| 48 | 11.0 | 11.7 | 10.8 | 7.7 |
| 60 | 6.7 | 7.3 | 7.6 | 6.9 |
| 65 | | 5.9 | 6.2 | 6.6 |
| 70 | | | 4.9 | 5.4 |
| 75 | | | | 4.3 |

Main boom 62 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 9.8 | 33.0 | | | |
| 12 | 32.1 | 26.7 | | |
| 16 | 29.1 | 24.8 | 17.2 | |
| 19 | 26.9 | 23.3 | 16.5 | 11.6 |
| 24 | 24.1 | 20.8 | 15.1 | 10.9 |
| 32 | 21.4 | 18.7 | 13.2 | 9.6 |
| 40 | 15.0 | 15.4 | 12.0 | 8.6 |
| 48 | 10.7 | 11.0 | 11.0 | 7.9 |
| 65 | 5.1 | 5.3 | 5.8 | 6.3 |
| 70 | | 4.1 | 4.7 | 5.1 |
| 75 | | | 3.6 | 4.0 |
| 80 | | | | 3.1 |

Main boom 68 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 26 |
| 10 | 30.2 | | | |
| 12 | 29.7 | 25.2 | | |
| 16 | 26.4 | 23.7 | 16.9 | |
| 20 | 23.5 | 21.5 | 16.0 | 11.5 |
| 24 | 21.0 | 19.4 | 14.9 | 11.0 |
| 28 | 19.7 | 18.0 | 14.0 | 10.3 |
| 36 | 17.4 | 16.3 | 12.6 | 9.3 |
| 44 | 12.3 | 12.6 | 11.5 | 8.4 |
| 55 | 7.6 | 7.9 | 8.5 | 7.6 |
| 70 | 3.6 | 3.9 | 4.4 | 4.8 |
| 75 | | 2.8 | 3.3 | 3.8 |
| 80 | | | 2.4 | 2.8 |

Main boom 74 m

| Radius (m) | Fixed jib length in (m) | | | |
|---------------|-------------------------|------|------|------|
| | 11 | 14 | 20 | 23 |
| 10.2 | 26.3 | | | |
| 13 | 25.1 | 22.7 | | |
| 16 | 22.7 | 21.3 | 16.3 | |
| 18 | 21.3 | 20.1 | 16.2 | 13.5 |
| 20 | 20.2 | 19.0 | 15.6 | 13.3 |
| 24 | 18.0 | 17.3 | 14.4 | 12.5 |
| 28 | 16.7 | 16.0 | 13.5 | 11.9 |
| 36 | 15.5 | 14.6 | 12.3 | 10.8 |
| 44 | 11.9 | 12.2 | 11.4 | 9.8 |
| 55 | 7.2 | 7.6 | 8.2 | 8.5 |
| 75 | 2.3 | 2.5 | 3.0 | 3.2 |
| 80 | | | 2.1 | 2.3 |

Main boom 77 m

| Radius (m) | Fixed jib length in (m) | | |
|---------------|-------------------------|------|------|
| | 11 | 14 | 17 |
| 10.3 | 24.2 | | |
| 13 | 23.3 | 21.0 | |
| 14 | 22.4 | 21.0 | 18.5 |
| 16 | 21.0 | 19.8 | 18.5 |
| 18 | 19.8 | 18.7 | 17.6 |
| 20 | 18.8 | 17.6 | 16.8 |
| 24 | 16.8 | 16.1 | 15.3 |
| 28 | 15.6 | 15.0 | 14.4 |
| 36 | 14.5 | 13.8 | 13.2 |
| 44 | 11.6 | 11.9 | 12.2 |
| 55 | 7.1 | 7.4 | 7.8 |
| 75 | 2.2 | 2.4 | 2.6 |

Capacities in metric tonnes with fixed jib (No. 1008.xx), 82.3 counterweight + 36 t carbody counterweight. Above lift chart is for reference only. For actual lift duty and complete chart with all available configurations please refer to lift chart in operator's cab or manual.

Notice

