

EN-US



LRH 200 unplugged

LRH 3102.07
www.liebherr.com

LIEBHERR

Piling and drilling rigs




Assistance systems




Remote-controlled assembly and disassembly

The remote control facilitates the safe assembly and disassembly of the machine. The operator can change position and thus has a better view of collision points.

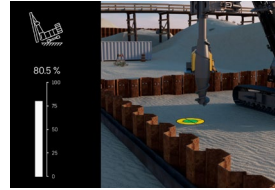

Ground pressure visualisation

Changes in the leader position or swinging the uppercarriage lead to a shift in the centre of gravity. Centres of gravity, load moments and ground pressure distribution under the crawler are calculated in real time.

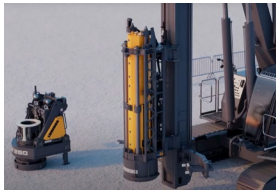

Attachment recognition

The basic machine's control system detects attachments, records their operating hours and optimises oil quantities and pressures. Operating parameters and faults are recorded and can be recalled via LiDAT.



Automatic leader adjustment

The operator can save the leader inclination. At the touch of a button, the leader can be set to the desired inclination at the piling or drilling point for each new working step. This saves time and ensures precise results.



Drilling assistant for single pass method

The rope crowd system, rotary drive and the amount of flowing concrete are optimally matched during drilling and subsequent extraction.

Technical description



Drive system

Max. drive power	255 kW
Battery type	High Performance Battery System
Technology	Li-Ion NMC (nickel manganese cobalt)
Max. charging power	40 kW (CEE socket 63 A / 400 VAC) 20 kW (CEE socket 32 A / 400 VAC)
Option	80 kW (CEE socket 125 A / 400 VAC)
Battery capacity	300 kWh
Option	400 kWh 600 kWh
Mains voltage	400 VAC (3 phase + N + PE)
Capacity	4 h*
Option	8 h 12 h

* in normal operation in the pile driving mode



Hydraulic system

Pump for working tools	2x 73 gal/min
Separate pump for kinematics	34 gal/min
Hydraulic oil tank capacity	159 gal
Max. working pressure	5,076 PSI
Hydraulic oil	electronic monitoring of all filters use of synthetic environmentally friendly oil possible



Crawlers

Drive system	with fixed axial piston hydraulic motors
Crawler side frames	maintenance-free, with hydraulic chain tensioning device
Brake	hydraulically released, spring-loaded multi-disc holding brake
Drive speed	0-0.83 mph
Track force	149,498 lbf
Grousers	Width 35.4 inch (option 27.6 and 31.5 inch)



Swing gear

Drive system	with fixed axial piston hydraulic motors, planetary gearbox, pinion
Swing ring	triple-row roller bearing with external teeth
Brake	hydraulically released, spring-loaded multi-disc holding brake
Swing speed	0-3.75 rpm continuously variable



Hammer winch with free fall

Line pull (effective)	44,962 lbf
Line pull in pile driving operation	40,466 lbf
Rope diameter	24 mm
Rope speed	0-185 ft/min

The winch is outstanding in its compact design and easy assembly.

Clutch and braking functions on the free-fall system are provided by a compact designed, low wear and maintenance-free multi-disc service brake.



Pile winch with free fall

Line pull (effective)	44,962 lbf
Line pull in pile driving operation	35,969 lbf
Rope diameter	24 mm
Rope speed	0-185 ft/min

The winch is outstanding in its compact design and easy assembly.


Clutch and braking functions on the free-fall system are provided by a compact designed, low wear and maintenance-free multi-disc service brake.

Remarks:

- Illustrations showing the types of application (e.g. full displacement drilling, continuous flight auger drilling etc.) are examples only.
- Weights and transport dimensions can vary with the final configuration of the machine. The figures in this brochure may include options which are not within the standard scope of supply of the machine.

Dimensions

Standard

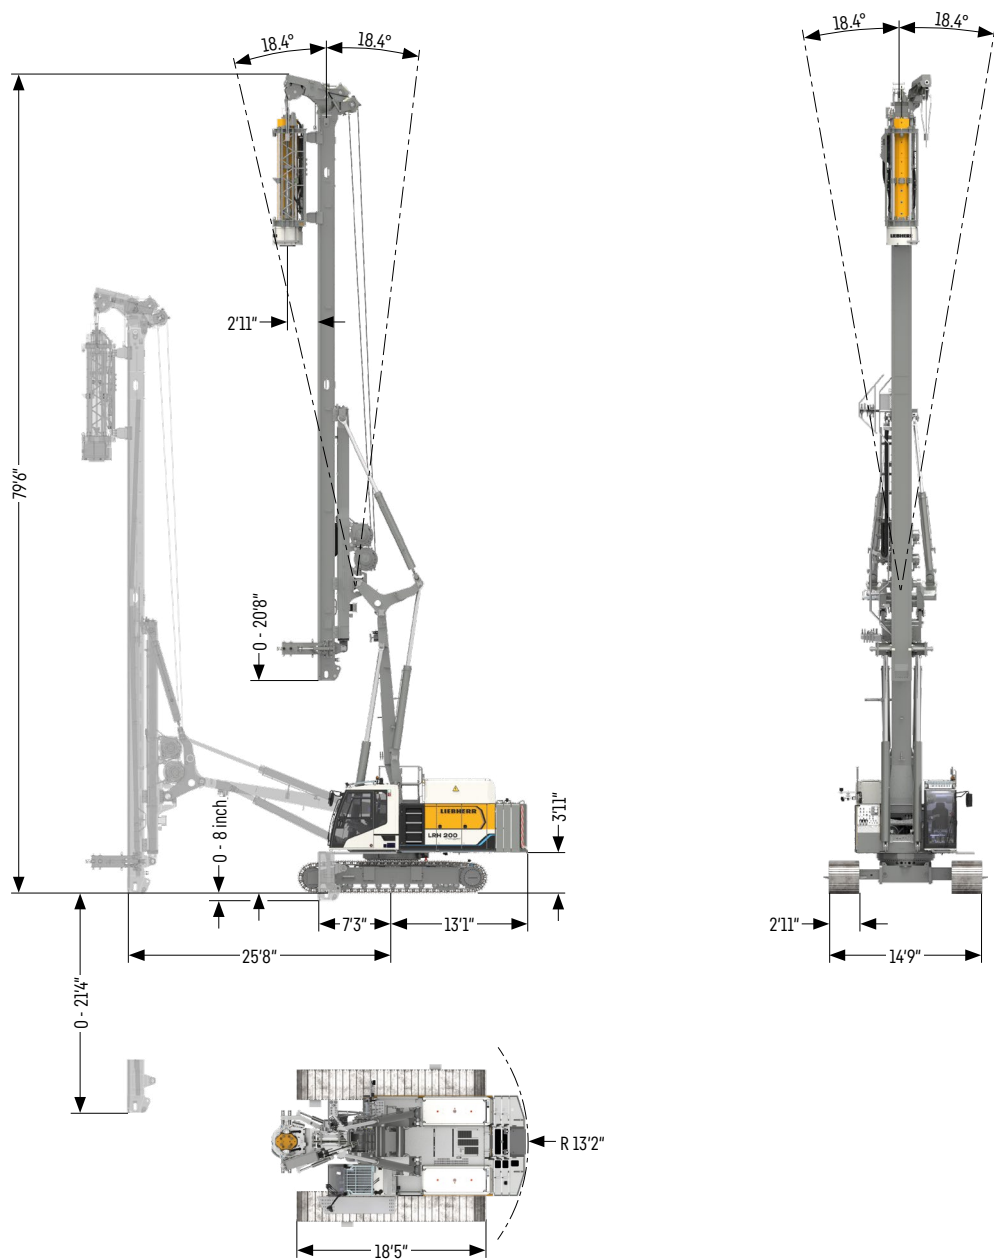


Operating weights

Total weight with hammer H 6-6	lbs 179,678
Total weight with hammer H 10-100	lbs 194,007

The operating weight includes the basic machine LRH 200 unplugged and 39,683 lbs counterweight.
* Hammer H 10-100

Folding leader

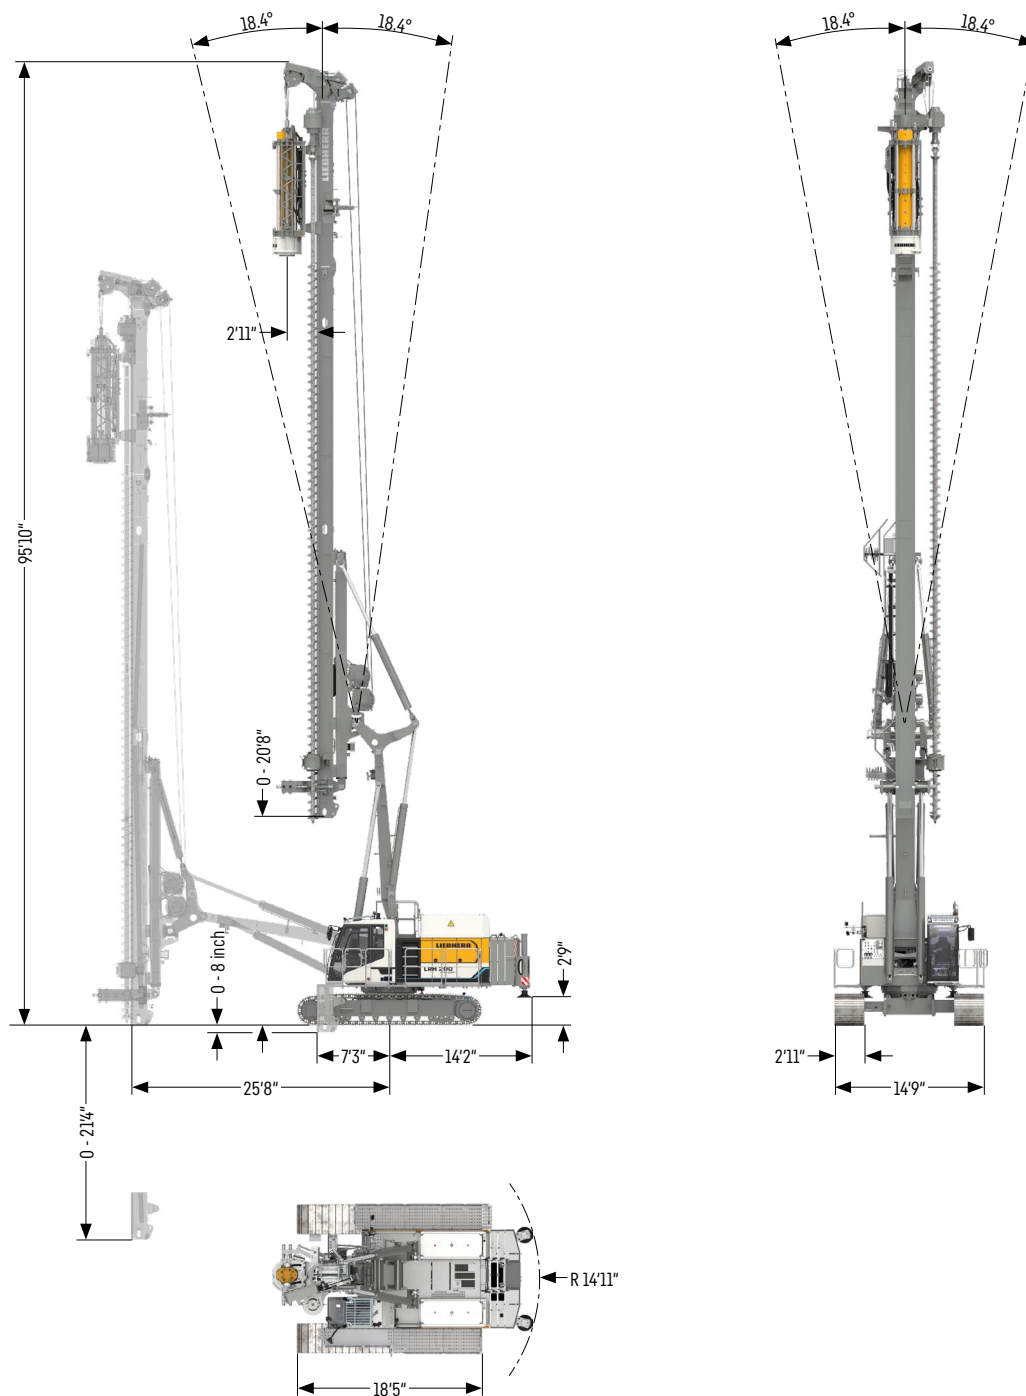


Operating weights

Total weight with hammer H 6-6	lbs 187,172
Total weight with hammer H 10-100	lbs 201,502

The operating weight includes the basic machine LRH 200 unplugged, rotary BA 35 and 39,683 lbs counterweight.

* Hammer H 10-100


Drilling version

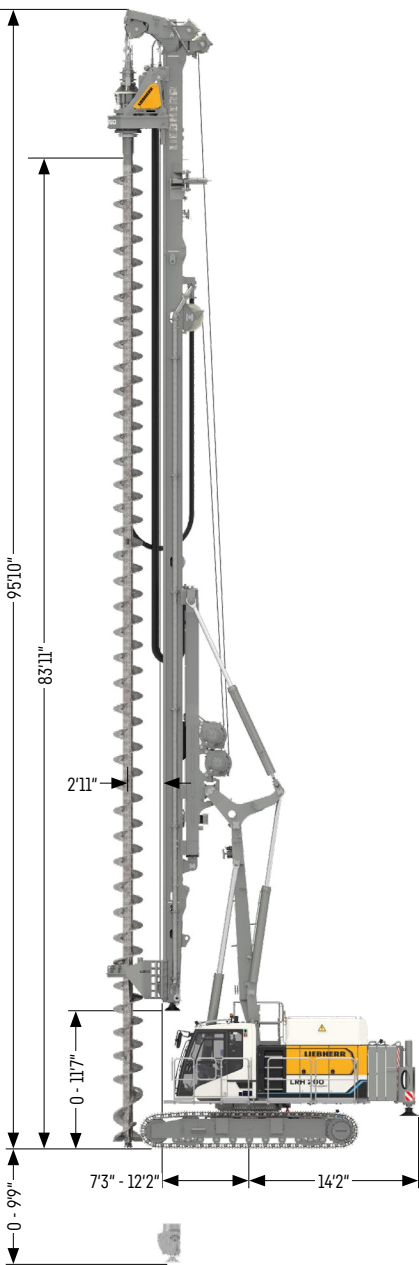

Operating weight

Total weight with 35.4 inch 3-web grousers	lbs 200,400
The operating weight includes the basic machine LRH 200 unplugged incl. rotary BAT 250, auger, auger cleaner and 39,683 lbs counterweight.	

Inclinations for pile driving operation and down-the-hole drilling

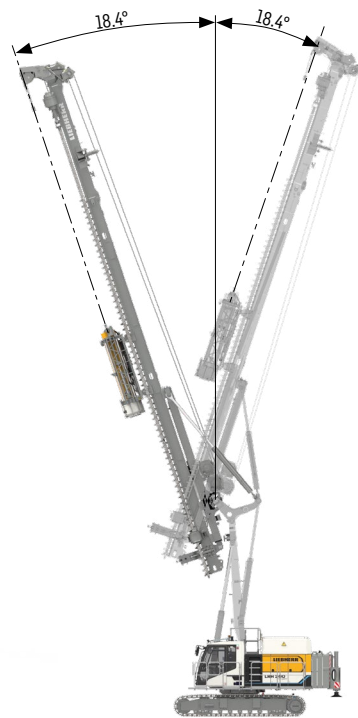

Local zero emission

Emission-free

The new machines with alternative electro-hydraulic drive have a very low noise level and are also emission-free. That is a huge advantage in areas sensitive to noise and also for the people working on the jobsite.

Operation

The LRH 200 unplugged can be operated both connected to the power supply (plugged in) or powered by battery (unplugged).

Sustainability


Liebherr is aware of its responsibility towards society and the environment and, with the unplugged series, strives for the best possible combination of environmental sustainability, customer benefit and efficiency.





Plugged in


When connected to the power supply, there are no restrictions in performance and application of the machine when compared to the conventional version with diesel engine. The battery is constantly charged when connected to the power supply and therefore always provides sufficient energy.

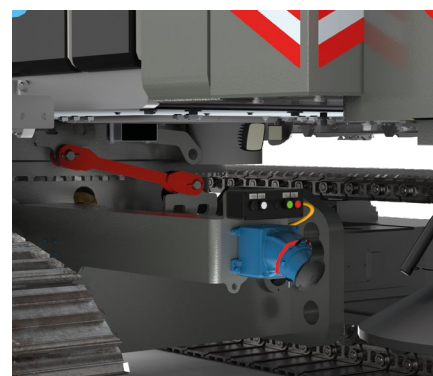

Unplugged


In normal operation in the pile driving mode, the battery is designed for an operating time of 4 hours (standard) and 8 or 12 hours (option). It can be simply recharged using a conventional jobsite electric supply (32 A, 63 A, 125 A).

Transport dimensions and weights

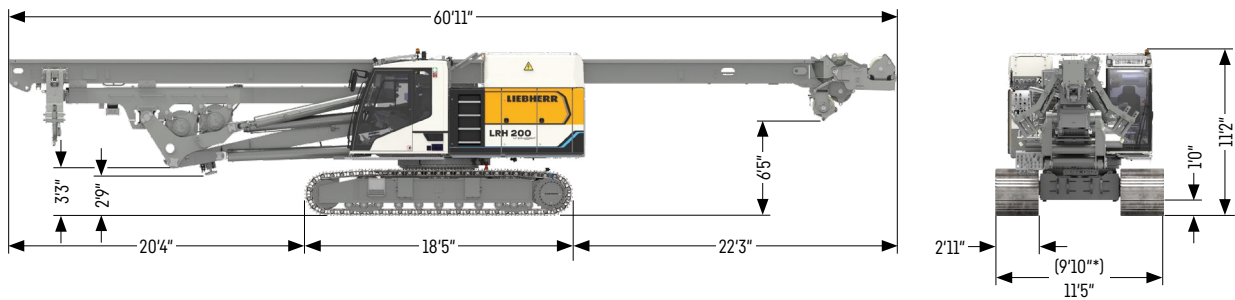


Transport standard

includes the basic machine (ready for operation) with leader, without counterweight	lbs 118,609
* with 27.6 inch grousers, without all round platform and without railings	

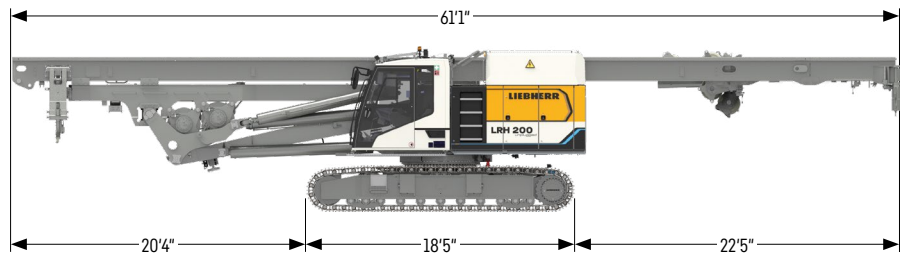


Transport folding leader

includes the basic machine (ready for operation) with leader, without counterweight	lbs 122,357
---	-------------

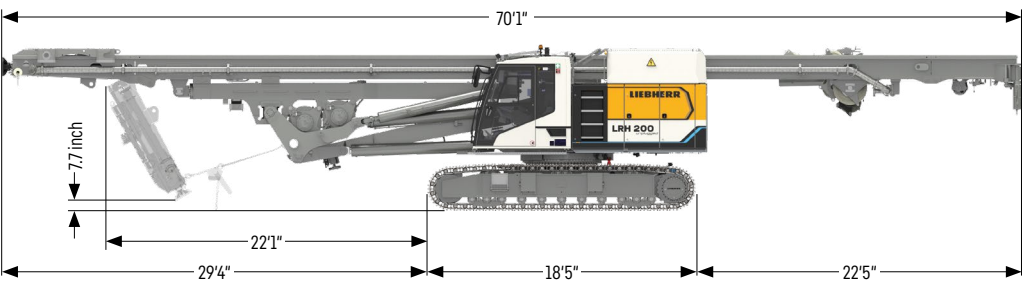





Transport drilling version

includes the basic machine (ready for operation) with leader, concrete supply line and multi-sledge, without counterweight	lbs 126,766
--	-------------

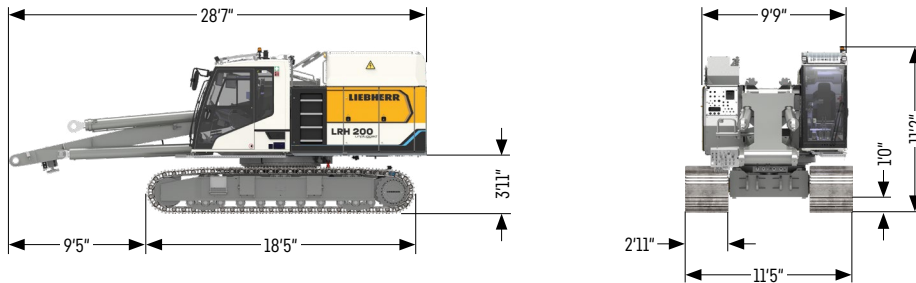

Basic machine

with crawler side frames, without counterweight	lbs 79,807
---	------------

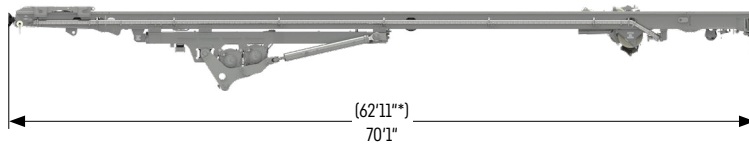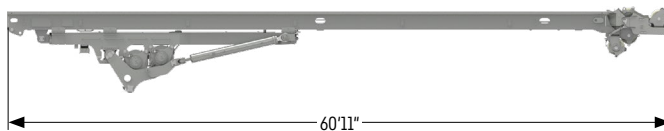



Leader

Weight standard leader	lbs 37,258
Weight folding leader	lbs 41,006
Weight drilling version	lbs 46,958

* leader lower part folded



Options

Concrete supply line	lbs 1,323
All round platform with railings	lbs 882





Counterweight

Weight lbs 17,637





Counterweight with rear support unit

Weight lbs 17,637





Intermediate slab

Weight lbs 11,023





BA 35

Weight lbs 3,086

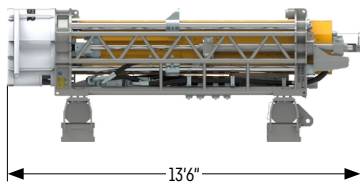



Hammer H 6-6

Weight incl. 13,228 lbs drop weight lbs 21,385

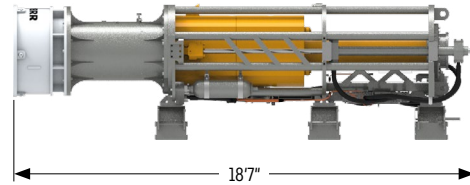



Hammer H 10-100

Weight incl. 22,046 lbs drop weight lbs 35,715



BAT 250


Weight lbs 14,330



MA 180

Weight lbs 12,566

Hydraulic hammer H 6 and H 10

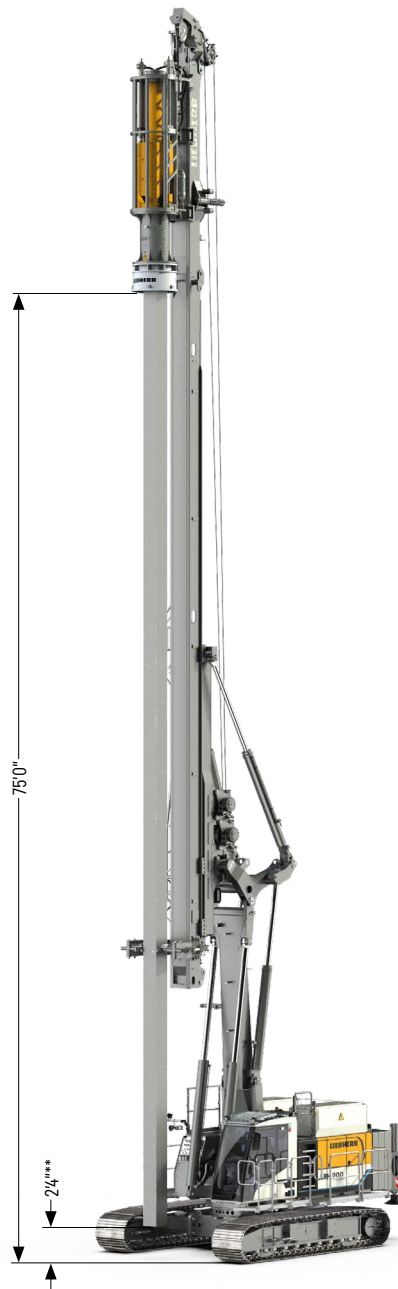

Performance data

Hammer type		H 6-3	H 6-4	H 6-5	H 6-6	H 10-75	H10-100
Drop weight	lbs	6,614	8,818	11,023	13,228	16,535	22,046
Max. rated energy	lbf-ft	26,552	35,403	44,254	53,104	66,381	88,507
Blow rate	Blows/min	50-150	50-150	50-150	40-150	50-150	50-150
Max. recommended pile length*	ft	80.0	80.0	80.0	80.0	73.5	73.5
Hammer weight incl. pile helmet and dolly	lbs	14,771	16,976	19,180	21,385	30,203	35,715



Various pile helmet sizes up to diameters of 2.1 ft for the hammer H 6, up to 2.6 ft for the hammer H 10 or in square design available as standard.

Other pile helmet sizes available on request

* For the version without leader upper part the max. pile length is reduced by 16.4 ft.

** X dimension with pile mounted in the pile helmet.

Pre-drill BA 35

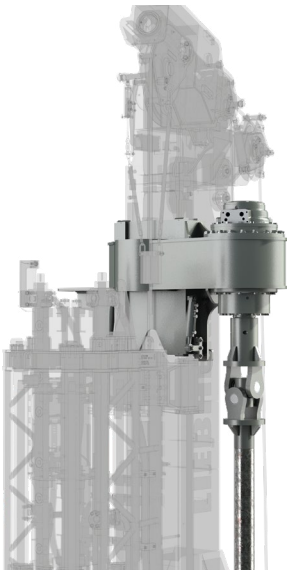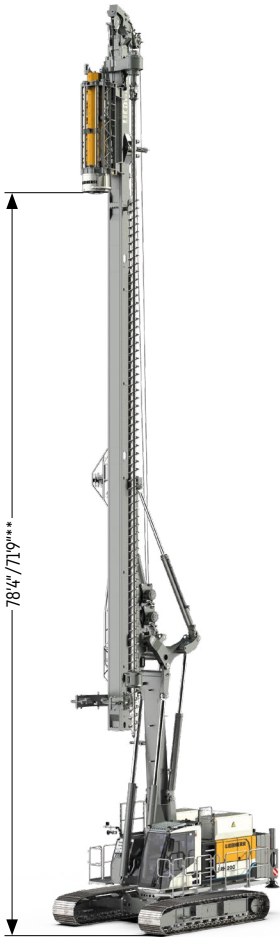

Performance data


Rotary drive - torque	lbf-ft	0-25,815
Rotary drive - speed	rpm	0-20
Max. drilling diameter	ft	1.2
Max. recommended pile length* H 6/H 10	ft	76.9/70.2
Max. drilling depth* H 6/H 10	ft	49.2/43.6
Additional crowd force	Hammer weight	

Other drilling diameters available on request

* For the version without leader upper part the max. drilling depth and the max. pile length are reduced by 16.4 ft.

** Dimension H 10

Continuous flight auger drilling

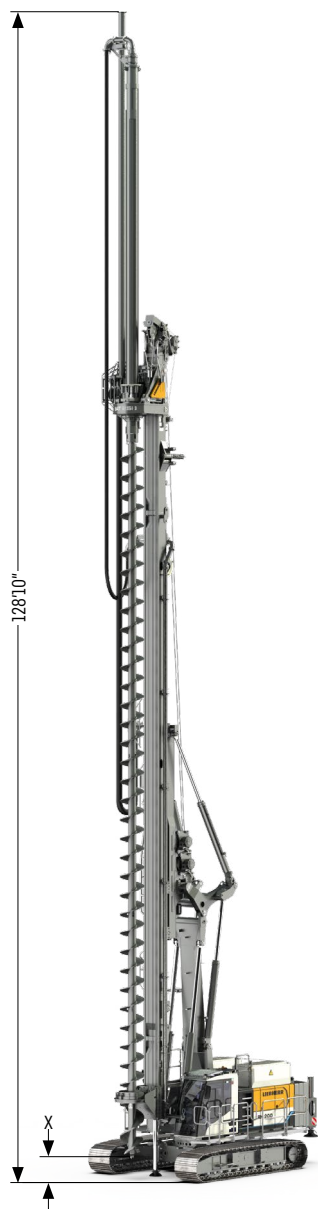

Performance data

Rotary drive - torque	lbf-ft	0-169,639
Rotary drive - speed	rpm	0-58
Max. drilling diameter*	ft	3.3
Drilling depth without Kelly extension**	ft	80.4
Drilling depth with 32.8ft Kelly extension**	ft	113.2
Max. pull force/max. crowd force (standard)	lbf	89,923/44,962
Max. pull force/max. crowd force (option)	lbf	134,885/0

Above drilling depths take into account that an auger cleaner is used and the cardan joint has been removed.
Above drilling depths are valid for the use of standard tools and for an X dimension of 1.3 ft (see above illustration).

* Other drilling diameters available on request

** For the version without leader upper part the drilling depth is reduced by 16.4 ft.

Full displacement drilling



Performance data

Rotary drive - torque	lbf-ft	0-169,639
Rotary drive - speed	rpm	0-58
Max. drilling diameter*	ft	1.6
Drilling depth without Kelly extension**	ft	82.7
Drilling depth with 32.8 ft Kelly extension**	ft	115.5
Max. pull force/max. crowd force (standard)	lbf	89,923/44,962
Max. pull force/max. crowd force (option)	lbf	134,885/0

Above drilling depths are valid for the use of standard tools and for an X dimension of 0.6 ft (see above illustration).

* Other drilling diameters available on request

** For the version without leader upper part the drilling depth is reduced by 16.4 ft.

Soil mixing



Performance data BAT 250

Rotary drive - torque	lbf-ft	0-169,639
Rotary drive - speed	rpm	0-58
Max. mixing diameter*	ft	4.9
Mixing depth**	ft	79.7
Mixing depth with 32.8 ft Kelly extension**	ft	112.3
Max. pull force/max. crowd force (standard)	lbf	89,923/44,962
Max. pull force/max. crowd force (option)	lbf	134,885/0

Above mixing depths are valid for the use of standard tools and for an X dimension of 3.7 ft for MA 180, and 1.9 ft for BAT 250 (see above illustration).

* Other mixing diameters available on request.


** For the version without leader upper part the mixing depth is reduced by 16.4 ft.



Performance data MA 180

Rotary drive - torque	lbf-ft	0-121,698
Rotary drive - speed	rpm	0-80
Max. mixing diameter*	ft	3.3
Mixing depth**	ft	79.7
Max. pull force/max. crowd force (standard)	lbf	89,923/44,962
Max. pull force/max. crowd force (option)	lbf	134,885/0

Down-the-hole drilling

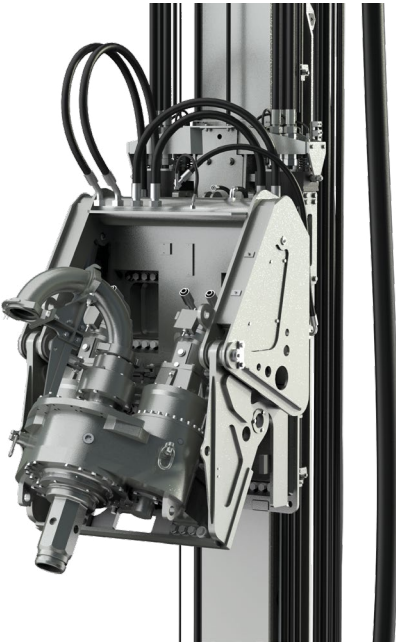

Performance data DHR 110

Rotary drive - torque	lbf-ft	0-78,182
Rotary drive - speed	rpm	0-41
Max. drilling depth*	ft	82.7
Max. pull force/max. crowd force (standard)	lbf	89,923/44,962
Max. pull force/max. crowd force (option)	lbf	134,885**/0

* For the version without leader upper part the drilling depth is reduced by 16.4 ft.


** In recovery mode, drilling operation max. 89,923 lbf

Elevation mode



By supporting the leader on the ground and extending the rear support cylinders, the carrier machine is elevated. The undercarriage can thus be swivelled on the spot, which makes it easier to move the piling rig in restricted spaces.

Service mode (without attachments)

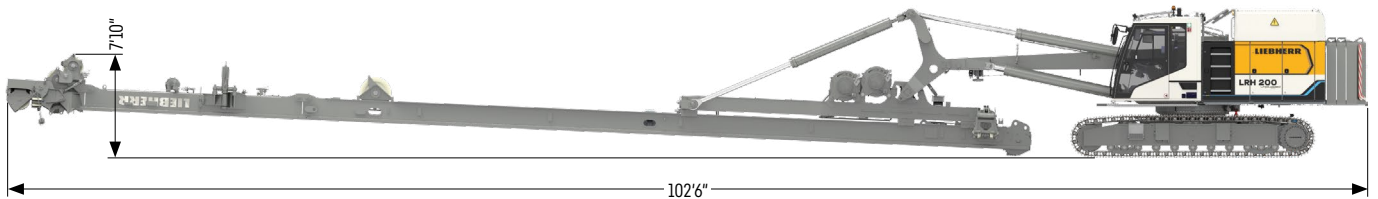

For maintenance and service work on the leader and carrier machine, the leader can be folded forward. In this position the piling rig cannot move or travel.

Digital solutions

Liebherr-Werk Nenzing GmbH has set itself the goal of using digital solutions to network and optimise processes on the jobsite.

In the progression from an experienced machine manufacturer to a full-service provider Liebherr already has a number of digital solutions, which provide substantial support for all those involved in the construction site.



MyLiebherr

One portal, all services



PDE

Process data recording



MyJobsite

Your jobsite at a glance



LIPOS

Positioning system



XpertAssist

Remote support in real time




LiDAT

Data transfer and positioning system



MyNotifier

Monitoring tool for wind conditions and battery status

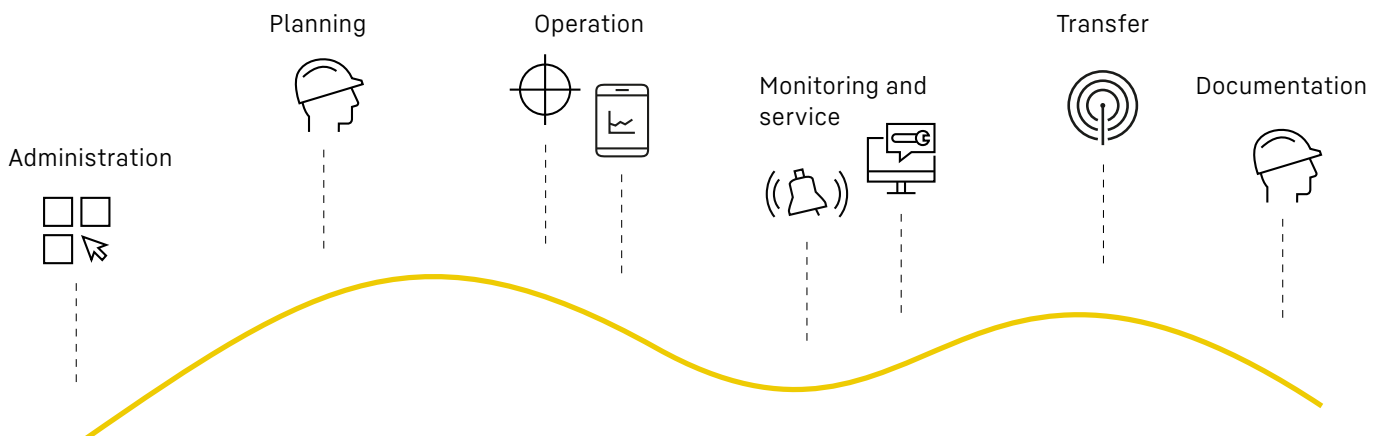



Download datasheet



Please contact us.

Liebherr-Werk Nenzing GmbH · Dr. Hans Liebherr Str. 1 · 6710 Nenzing, Austria
Phone +43 50809 41-473 · foundation.equipment@liebherr.com · www.liebherr.com
facebook.com/LiebherrConstruction