

# **LHM 600**

www.liebherr.com


## LIEBHERR

**Mobile harbour crane** 

Maximum lifting capacity 208 t Maximum outreach 58 m Ship size New Panamax, Very Large Bulk Carrier, Ultra Large Container Ship

# **Main dimensions**

## Heavy lift operation

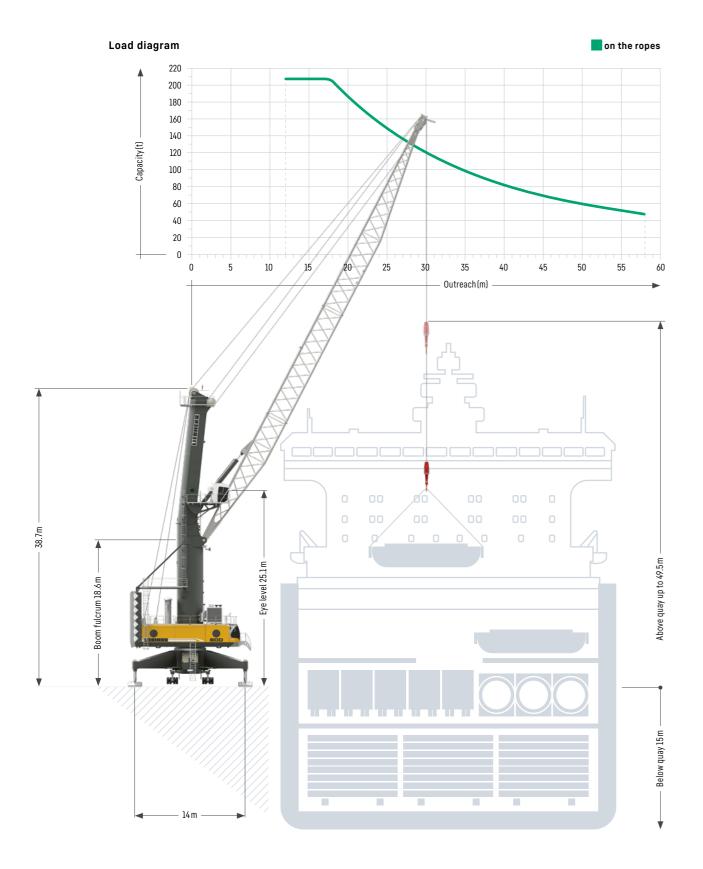

# **Lifting capacities**

## Heavy lift operation

## Maximum crane capacity 208 t

	Hook operation on the ropes
Outreach	Heavy lift
(m)	(t)
12	208.0
17	208.0
18	203.9
20	185.4
22	168.4
24	153.2
26	141.2
28	130.4
30	120.0
32	110.5
34	102.0
36	94.8
38	88.6
40	82.7
42	77.3
44	72.2
46	67.6
48	63.5
50	59.6
52	56.1
53	54.5
56	50.2
58	47.8


Weight rotator 5.5 t

## Project cargo & heavy lift up to 208 tonnes

Safety and precision are the most important criteria when lifting heavy goods.

## **Main dimensions**

## **Bulk operation**

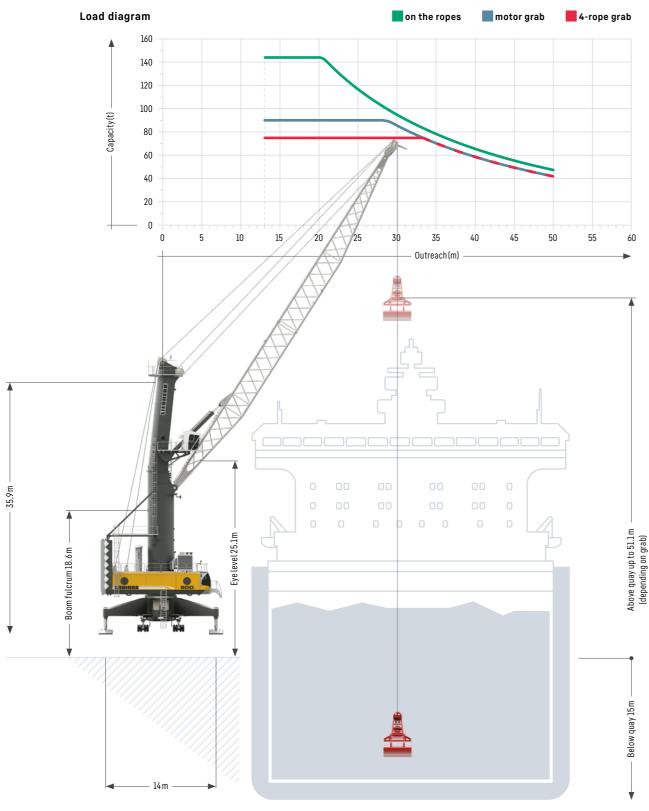

Very Large Bulk Carrier

# Lifting capacities

## **Bulk operation**

Maximum crane capacity 144t

	Hook operation	Grab operation	
Outreach	on the ropes	4-rope grab	motor grab
(m)	(t)	(t)	(t)
13-18	144.0	75.0	90.0
19	144.0	75.0	90.0
20	144.0	75.0	90.0
22	133.0	75.0	90.0
24	121.1	75.0	90.0
25	115.9	75.0	90.0
26	111.6	75.0	90.0
28	103.1	75.0	90.0
29	98.8	75.0	89.0
30	94.8	75.0	85.3
31	91.0	75.0	81.9
32	87.3	75.0	78.6
33	83.9	75.0	75.5
34	80.6	72.5	72.5
36	74.9	67.4	67.4
38	70.0	63.0	63.0
40	65.4	58.8	58.8
42	61.0	54.9	54.9
44	57.0	51.3	51.3
46	53.4	48.1	48.1
48	50.1	45.1	45.1
50	47.1	42.4	42.4


Weight ramshorn hook 3.8t; Weight rotator 4.0t

# Standard configuration – turnover up to 1,500 t per hour Pactronic® – turnover up to 2,000 t per hour

The powerful hydrostatic transmission and advanced Liebherr electronics ensure short, productive working cycles during bulk handling.

## **Main dimensions**

## **Container operation**

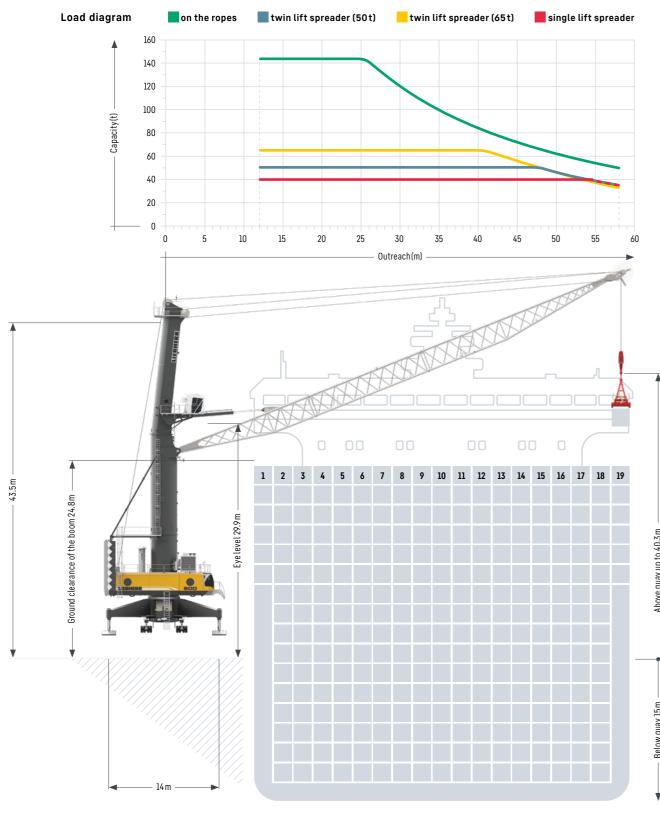

Ultra Large Container Vessel

# **Lifting capacities**

## **Container operation**

<b>4</b> /4/11/10									
	Spreader ope	ration under		Hook operation on the ropes		Spreader ope	ration under		Hook operation on the ropes
Outreach	Single lift	Twin lift (50t)	Twin lift (65t)	Standard	Outreach	Single lift	Twin lift (50t)	Twin lift (65t)	Standard
(m)	(t)	(t)	(t)	(t)	(m)	(t)	(t)	(t)	(t)
12	41.0	50.0	65.0	104.0	12	41.0	50.0	65.0	144.0
14	41.0	50.0	65.0	104.0	14	41.0	50.0	65.0	144.0
16	41.0	50.0	65.0	104.0	16	41.0	50.0	65.0	144.0
18	41.0	50.0	65.0	104.0	18	41.0	50.0	65.0	144.0
20	41.0	50.0	65.0	104.0	20	41.0	50.0	65.0	144.0
22	41.0	50.0	65.0	104.0	22	41.0	50.0	65.0	144.0
24	41.0	50.0	65.0	104.0	24	41.0	50.0	65.0	144.0
26	41.0	50.0	65.0	104.0	25	41.0	50.0	65.0	144.0
28	41.0	50.0	65.0	104.0	28	41.0	50.0	65.0	130.4
30	41.0	50.0	65.0	104.0	30	41.0	50.0	65.0	120.0
33	41.0	50.0	65.0	104.0	33	41.0	50.0	65.0	106.1
34	41.0	50.0	65.0	102.0	34	41.0	50.0	65.0	102.0
36	41.0	50.0	65.0	94.8	36	41.0	50.0	65.0	94.8
38	41.0	50.0	65.0	88.6	38	41.0	50.0	65.0	88.6
40	41.0	50.0	65.0	82.7	40	41.0	50.0	65.0	82.7
42	41.0	50.0	62.8	77.3	42	41.0	50.0	62.3	77.3
44	41.0	50.0	57.7	72.2	44	41.0	50.0	57.2	72.2
47	41.0	50.0	50.9	65.4	47	41.0	50.0	52.6	65.4
48	41.0	49.3	49.0	63.5	48	41.0	48.8	48.5	63.5
50	41.0	45.4	45.1	59.6	50	41.0	44.9	44.6	59.6
52	41.0	41.9	41.6	56.1	52	41.0	41.4	41.1	56.1
53	41.0	40.3	40.0	54.5	53	41.0	39.8	39.5	54.5
54	40.5	38.8	38.5	53.0	54	40.0	38.3	38.0	53.0
56	37.7	36.0	35.7	50.2	56	37.2	35.5	35.2	50.2
58	35.3	33.6	33.3	47.8	58	34.8	33.1	32.8	47.8

Weight rotator 3.5t; Weight fully automatic (telescopic) spreader 9t Weight (50t) twin lift spreader 10.7t; Weight (65t) twin lift spreader 11.0t Weight rotator 4.0t; Weight fully automatic (telescopic) spreader 9t Weight (50t) twin lift spreader 10.7t; Weight (65t) twin lift spreader 11.0t

# Standard configuration – turnover up to 32 cycles per hour Pactronic® – turnover up to 38 cycles per hour

Precision to perfection: With incredibly short acceleration times for all crane motions, Liebherr is the top performer in container handling.

## **Technical Data**

## Heavy lift operation

## **Capacity and Classification**

	Capacity	Classification
Standard operation	≤ 73t	A8
Heavy lift operation	≤ 208t	A3

#### **Main Dimensions**

Min. to max. outreach	12 – 58 m
Height of boom fulcrum	18.6 m
Tower cabin height (eye level)	25.1m
Overall height (top of tower)	38.7 m
Overall length of undercarriage	26.7 m
Overall width of undercarriage	6.4 m
Number of axle sets (standard)	26
Number of axle sets (optional)	28

## **Working Speeds**

Hoisting / lowering	0 – 90 m/min
Slewing	0 – 1.6 rpm
Luffing (average horizontal speed)	0 – 58 m/min
Travelling	0 - 5.0 km/h

## **Propping Arrangements**

Standard supporting base	14.0 m x 14.0 m
Standard pad dimension	4.0 x 5.5 m x 1.8 m
Standard supporting area of pads	9.9 m <sup>2</sup>

Optional size of supporting pads and bases on request

## **Quay Load Arrangements**

Uniformly distributed load	2.2t/m2	
Max. load per tyre	5.5t	
1 0 0	in the quay loads specified above can even be reduced number of axle sets can easily be adapted to comply astrictions	i.

## Weight

Total weight of crane in heavy lift version	approx. 575 t	
(206t winch, 58 m boom, Pactronic®)		

## **Hoisting Heights**

Above quay at minimum radius	49.5 m
Above quay at maximum radius	35.5 m
Below quay level (approx.)	15.0 m

## **Bulk Operation**

## **Capacity and Classification**

	Capacity	Classification
Four rope grab operation	≤ 63t	A8
Motor grab	≤ 63t	A8

#### **Main Dimensions**

Min. to max. outreach	13-50 m
Height of boom fulcrum	18.6 m
Tower cabin height (eye level)	25.1m
Overall height (top of tower)	35.9 m
Overall length of undercarriage	24.7 m
Overall width of undercarriage	6.4 m
Number of axle sets (standard)	22
Number of axle sets (optional)	28

## **Working Speeds**

Hoisting / lowering	0 – 120 m/min
Slewing	0 – 1.6 rpm
Luffing (average horizontal speed)	0 – 53 m/min
Travelling	0 - 5.0 km/h

## **Propping Arrangements**

Standard supporting base	14.0 m x 14.0 m
Standard pad dimension	4.0 x 5.5 m x 1.8 m
Standard supporting area of pads	9.9 m <sup>2</sup>

Optional size of supporting pads and bases on request

## **Quay Load Arrangements**

Uniformly distributed load	2.0 t/m <sup>2</sup>
Max. load per tyre	5.8 t

Due to a unique undercarriage design the quay loads specified above can even be reduced. Pad sizes, supporting base and the number of axle sets can easily be adapted to comply with the most stringent quay load restrictions.

## Weight

Total weight of crane in bulk version	approx E07+
(144t winch, 50 m boom, Pactronic®)	approx. 503 t

#### **Hoisting Heights**

Above quay at minimum radius	51.1m	
Above quay at maximum radius	32.9 m	
Below quay level (approx.)	15.0 m	

## Container operation

## **Capacity and Classification**

	Capacity	Classification
Container operation	≤ 73 t	A8
Standard operation	≤ 63t	A7

#### **Main Dimensions**

Min. to max. outreach	12-58 m
Height of boom fulcrum	23.4 m
Tower cabin height (eye level)	29.9 m
Overall height (top of tower)	43.5 m
Overall length of undercarriage	24.7 m
Overall width of undercarriage	6.4 m
Number of axle sets (standard)	24
Number of axle sets (optional)	28

## **Working Speeds**

Hoisting / lowering	0 – 120 m/min
Slewing	0 - 1.6rpm
Luffing (average horizontal speed)	0 - 58 m/min
Travelling	0 - 5.0 km/h

## **Propping Arrangements**

Standard supporting base	14.0 m x 14.0 m
Standard pad dimension	5.5 m x 1.8 m
Standard supporting area of pads	9.9 m2

Optional size of supporting pads and bases on request

## **Quay Load Arrangements**

0.26	0.01/2
Uniformly distributed load	2.0t/m <sup>2</sup>
Max. load per tyre	5.8t
Due to a unique undercarriage design the quay	•

Due to a unique undercarriage design the quay loads specified above can even be reduce Pad sizes, supporting base and the number of axle sets can easily be adapted to comply with the most stringent quay load restrictions.

## Weight

Total weight of crane in container version	
(144t winch, 58 m boom, 4.8 m tower extension,	approx. 560t
Pactronic®)	

#### **Hoisting Heights**

• •	
Above quay at minimum radius	45.0 m
Above quay at maximum radius	40.3 m
Relow quay level (annrox )	15 N m


8 LHM 600 S

## Undercarriage

#### Mobility


- Outstanding mobility and manoeuvrability
- Curves at any possible radii and even slewing on the spot

#### Schematic diagram

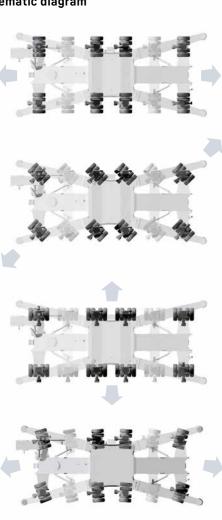

#### Modular propping system

- Minimised stress and strain of undercarriage due to cruciform support base which directs the load path from boom tip to quay
- Modular system allows further reduction of quay loads by installing additional axle sets
- Easy adaptation to various sizes of support pads and bases



## Hydraulic load distribution

- Hydraulic suspension avoids overloading of individual wheel sets
- Standard trailer tyres making requisition of spares economical and time-saving
- Increased lifetime of tyres due to individually steerable wheel sets




Optimum pressure distribution and adaption of wheel sets on uneven surfaces

# **Optional equipment**

## Additional products and services

- Pactronic® power by accumulator and electronics
- SmartGrip intelligent grabbing
- Cycoptronic® anti-sway system
- Teach-In semi-automatic point to point system
- Sycratronic® synchronizing crane control system
- Vertical Line Finder diagonal pull preventing system
- Collision alert system
- LiDAT® smartApp
- Economy software for optimised fuel consumption
- Video monitoring system
- Radio remote control
- Autopropping undercarriage
- Cyclone air-intake system for the engine
- Low temperature package
- Customer-specific painting & logo
- Additional (driven) axle sets
- Axle sets equipped with foamed tyres
- Different supporting bases and pad sizes
- Tower extension 4.8 m 9.6 m
- And many more as per customers' requirements

10 LHM 600 1:

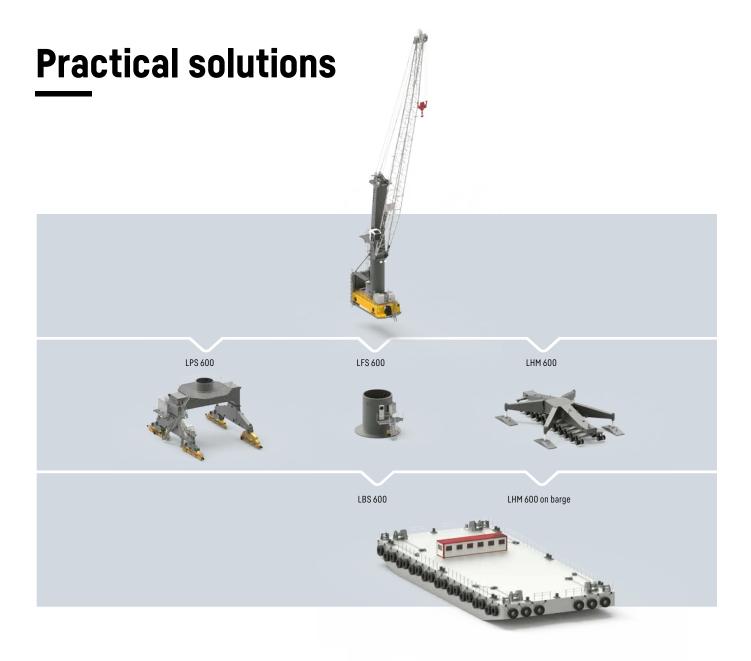

# Liebherr develops and produces special designs and solutions to meet customer-specific requirements

- The Liebherr Portal Crane (LPS) is an efficient combination of a space-saving portal (mounted on rails) and the proven mobile harbour crane concept.
  Particularly on narrow quays, individual portal solutions permit (railway) trains and (road) trucks to travel below the portal.
- Liebherr floating cranes (LBS) can be used for transhipment and midstream operation between oceangoing vessels and river barges on different types of waterways, including those having no or few quays. In addition, the LBS solution allows direct cargo transfer from ship to shore – especially when quays reach capacity limits.
- Depending on customer specifications, the LBS range may have varying lifting capacities due to tailor-made design solutions.
- Liebherr Fixed Slewing Cranes (LFS) are an efficient combination of a mobile harbour crane upper carriage and a fixed pedestal. LFS cranes provide an economical and space-saving solution for the installation on quaysides and jetties, especially where room for manoeuvring is limited and low ground pressure is essential. Additionally LFS solutions are also ideally suited for the installation on crane barges.