

# R 9200

Generation 7

## LIEBHERR

Mining excavator



#### Technologies

- Liebherr Power Efficiency
- IoMine ready

#### Powertrain options

Cummins ICE - Diesel: 810kW (FCO, Tier 4f)  
1,086 HP

GE E-Motor: 850kW (50Hz, 60Hz)  
1,139 HP

#### Backhoe configuration

Overall weight: 205 tonnes  
225 tons

Bucket payload: 22.5 tonnes  
25 tons

#### Face shovel configuration

Overall weight: 210 tonnes  
231 tons

Bucket payload: 22.5 tonnes  
25 tons

## Overview

# R 9200

 Diesel drive 810 kW / 1,086 HP  
Electric drive 850 kW / 1,139 HP

  $\text{m}^3$  BH 12.5 m<sup>3</sup> / 16.4 yd<sup>3</sup>  
FS 12.5 m<sup>3</sup> / 16.4 yd<sup>3</sup>

 BH 205 tonnes / 225 tons  
FS 210 tonnes / 231 tons

Patented EVO bucket



### Stress-relieved structure

The R 9200 is the optimal loading excavator to load 65t and 130t off-highway trucks. The R 9200 can meet any customer requirement thanks to leading technology. High productivity, exceptional reliability and true 200t class performance make the R 9200 a world-class loading tool.

### Standard heavy-duty bucket

- Highest bucket capacity in its class with proven EVO bucket design
- Maximised payload with versatile Liebherr bucket solution
- Shift levers and bucket links with integrated greasing system

### Perfect shovel truck match

- 3-4 pass loading of 65 tonne trucks
- 5 pass loading of 100 tonne trucks
- 7 pass loading of 140 tonne trucks



#### Latest cabin generation

- Increased comfort and ergonomics
- User-friendly operator station
- Elevated cab installation
- Suspended operator seat
- Slim line dash and LED lighting

#### Latest cutting-edge technologies

- Liebherr Assistance Systems
- Advanced machine monitoring with modern 15" touchscreens (day & night mode)
- Permanent vision system

#### Sustainable performance

- US EPA Tier 4f / EU Stage V compliant engine
- SCR after-treatment technology
- Serial implementation Liebherr Power Efficiency solutions
- Electric drive version

Performance & sustainability  
**Powertrain**

---



**+25 %**  
Fuel efficiency



## Diesel drive

### Cummins QSK38


810kW/1,086HP at 1,800RPM

12 cylinder V-engine

Displacement 37.8l/2,307 in<sup>3</sup>

### US EPA Tier 4f / EU Stage V

Using selective catalytic reduction technology to comply with latest emission regulations the R 9200 combines flexibility to meet customer expectations without compromising productivity.

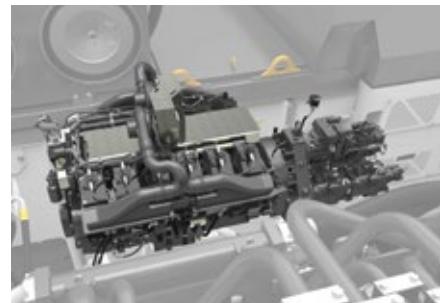

## Electric drive

Liebherr offers an alternative to diesel engines allowing customers to balance performance with environmental consciousness. Building on 40 years' experience in electric drive excavators, the electric drive option allows lower maintenance costs and reduced noise pollution. With high motor efficiency, the electric drive gives maximum performance.

- Lower maintenance costs
- 6,000V ( 50Hz other voltage and frequency on request)
- Integrated design elements on all machine structures

### No exhaust emission

Liebherr electric R 9200 provides class leading cycle times using electric motors without exposing people and the environment to diesel exhaust emissions. Complying with all Non Road Mobile Machinery (NRMM) emission regulations, the R 9200 E can be operated all around the world.

### Less noise level

Liebherr Electric driven machines can be operated without restrictions in noise sensitive areas.



# Productivity Attachment

## Build for maximum productivity



### Backhoe

12.5 m<sup>3</sup> / 16.4 yd<sup>3</sup>



140t trucks  
7 passes



100t trucks  
5 passes



65t trucks  
3-4 passes



### Face shovel

12.5 m<sup>3</sup> / 16.4 yd<sup>3</sup>



140t trucks  
8 passes



100t trucks  
5-6 passes



65t trucks  
3-4 passes

Site-specific factors like loose material density, bucket size, fill factors, truck body size and payload capacity will influence pass match. Contact your local Liebherr affiliate or sales partner for analysis of your site.

### Maximised payload

Designed for best force distribution, the attachment design delivers high digging and hoisting forces, which ensures maximum payload during each cycle. The EVO bucket allows the operator to take advantage of each pass and therefore increase productivity.

### Optimised cost per tonne

Built to outperform all competitors in its class, the R 9200 is a perfect loader for 65t up to 130t off-highway trucks.

\*Liebherr EVO bucket compared to competitor's average bucket capacity.



**+4 %**  
**Loading capacity\***



## Automation

### Bucket Filling Assistant

The first automation product of the Liebherr hydraulic excavator portfolio allows easier bucket filling and consistent bucket fill factors, especially in blocky or hard digging conditions. As a result overall productivity improves while operator's fatigue decreases.



### Anti-stalling function

Prevents the bucket from being stalled during the digging phase.



### Semi-automatic bucket filling function

Allows the machine electronic to realise fully automatic attachment movements.



Discover more.

# Comfort Operator cabin

## Enhanced comfort & ergonomics




### Advanced machine monitoring

- Modern and large touchscreens
- State-of-the-art on-board technologies
- Long term data storage for maintenance
- User-friendly piloting station
- On-board diagnostics to service staff



### Superior comfort

- Tinted laminated safety glass
- Armored front window
- Adjustable air suspended seat
- Foldable trainer seat
- Pressurised A/C system (single or double)

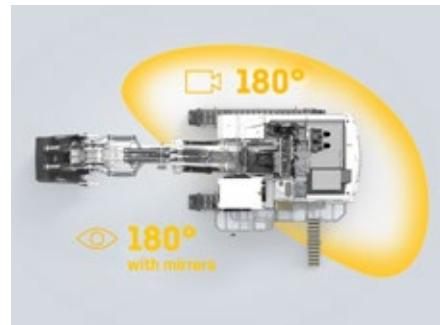

### Vision system

The R 9200 offers superior visibility of the machine's surroundings. The dedicated monitor inside the cabin provides continuous rear and side vision around the machine, from the two cameras strategically fixed on the uppercarriage.



## Working environment

### Operator comfort

Operator comfort and safety were the main concerns when designing the R 9200 cabin: a panoramic view, low noise level, strong structure (FOPS) and high safety standards. In addition Liebherr provides options to adapt the cab to specific thermal conditions or requirements.

### Optional

- Double A/C system
- External louvers
- Premium heated seats
- Four point harness
- Sliding hatch window
- Front protective grid
- HEPA filtration system



IoMine

# Unleash the full potential of your mine.



IoMine

## Your connected mining ecosystem

IoMine, Liebherr Mining's cutting-edge technology product line, supports customers' transition to integrated operations. By adopting IoMine, customers can improve decision-making and provide greater operational safety – all while fostering sustainable development and ensuring cost optimisation in the management of their mines. IoMine is a reliable partner for achieving a more efficient, cost-effective, and productive mining operation.

## Partnering for mining success

IoMine, Liebherr Mining's advanced technology product line, optimises operations by improving asset availability, efficiency and productivity. These products enhance fleet capabilities, simplify operations and improve fleet management for more profitability and smarter energy use.



## Unlock peak performance



### Enhanced decision-making

Optimise your mining operations and increase efficiency by making informed decisions supported by accurate, real-time data.



### Increased operational efficiency

Real-time operator assistance, streamlined maintenance and autonomous technologies work together to enhance integration, productivity, efficiency and profitability.



### Increased safety

Real-time machine monitoring and operator alerts from assistance systems enhance safety while autonomous technology reduces risks, ensuring a safer worksite.



### Maximised machine availability

Proactive maintenance, operational insights and advanced automation collectively prevent breakdowns, minimise downtime and boost efficiency, productivity and profitability for continuous operations.



## Let's journey together on the path to data-driven decision-making and autonomy in digging, dozing and hauling.



### Operate – Empower mining success.

Find the right IoMine products dedicated to operations to optimise processes, reinforce safety and increase the profitability of your mining operations.



### Automate – Safe. Efficient. Automated.

Liebherr's advanced automation solutions integrate seamlessly into your existing systems for real-time monitoring and intelligent automation.



### Maintain – Less downtime, more mining.

Keep your mining fleet running at peak performance with IoMine's dedicated maintenance products, whose innovative maintenance solutions are designed to minimise downtime and increase efficiency.



# Assistance Systems


## The best performance. Easy.



IoMine

### Get the best out of your Liebherr mining excavator

Available today on the R 9200, the Liebherr Assistance Systems are advanced onboard applications designed to support operators to become more efficient through analytics and actionable insights. Systems will assist the operator to obtain optimal productivity and efficiency by providing realtime operational information.



Want to live the real experience?



Measure and analyse every bucket payload for optimal truck loading



Data visualised within different views & advanced filtering



Display targeted productivity and actual payload with 99% accuracy



Provide transparency of performance, operating time and fuel efficiency



Identify operational conformance and improve operator effectiveness




State-of-the-art on-board touchscreen displays



Make informed decisions



Increase productivity

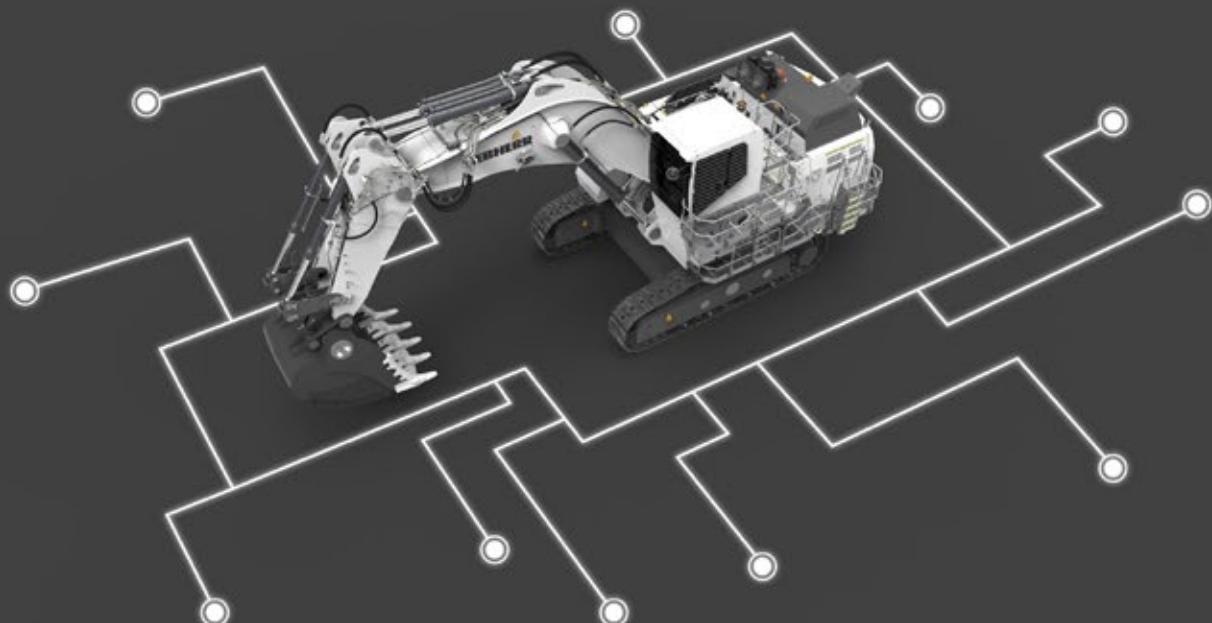



## Truck Loading Assistant

Assists the operator to obtain target truck payloads.

### With 99% measurement accuracy

- Measures instantaneously the bucket payload
- Provides real-time information to the operator
- Strategises the number of passes required
- Computes the best truck loading strategy
- Automatic truck recognition (optional)



## Performance monitoring

Measures and analyses the overall performance.

### Using KPIs, histograms and time-related charts

- Production KPIs
- Loading indicators
- Time distribution
- Energy efficiency



## Application severity

Quantifies application, reports severity indicators and provides an overall application severity score.

### KPIs to indicate and display the application as sensed by the machine

- Underfoot and digging conditions
- Abrasiveness and travel ratio
- Engine load factor and temperature variation
- Machine inclination, loading, etc.



## Operational conformance

Detects and counts events to improve operator effectiveness.

### Several filtering criteria to identify specific events

- Swinging into digging face
- Digging with swing brake activated
- Turning the machine with the attachment
- Bucket hitting track pads, etc.

Performance

# Advanced hydraulic system

Highest  
digging force

**650 kN**

Breakout force

**740 kN**

in its class



## Fast & precise movement

### Intelligent power management system

The Liebherr R 9200 mining excavator is equipped with a closed loop swing circuit. Kinetic energy is recovered when the swing motion is used during deceleration to drive the main and auxiliary pumps resulting in fuel consumption reduction.

Cylinder dampening through IMUs provides smoother attachment movements without affecting attachment speed.

### Independent cooling system

Oil and water cooling fans are independently and electronically managed. The oversized cooling systems reduce parasitic demand on engine horsepower ensuring maximum available horsepower is provided to the excavator working circuits.

### Valve bank control system

- Under slung arch hoses to improve lifetime
- Flow optimized hose fittings
- Less hydraulic pressure losses by design
- Pilot valves integrated into valve blocks



Up to **20 %**  
less fuel consumption


*"Adapt the power and the  
hydraulic flow specifically  
to the load profile."*

## Moving more with less

### Patented Liebherr Power Efficiency

Specific engine and hydraulic management, drastically reducing fuel consumption without any compromise on machine productivity.

- Adapted piloting processes according to operator requirements and machine condition
- Electronically controlled pressure and oil flow
- Reduce hydraulic throttling and load profile of the engine for increased component lifetime

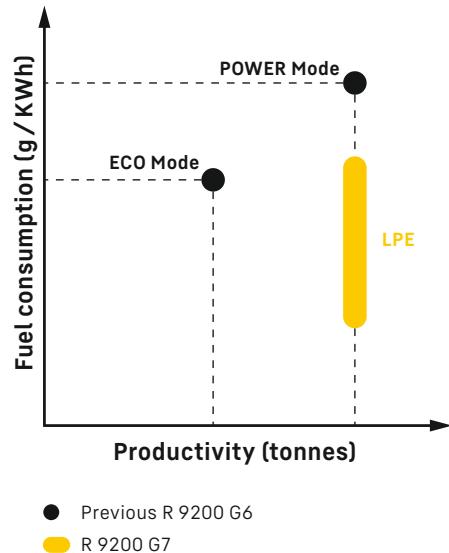


Safety

# Protecting your most important asset



## Machine accessibility

The R 9200 is fitted with an ergonomic hydraulically controlled 45 degree stairway with handrails, providing safe access to the uppercarriage. Single side access to all service points.

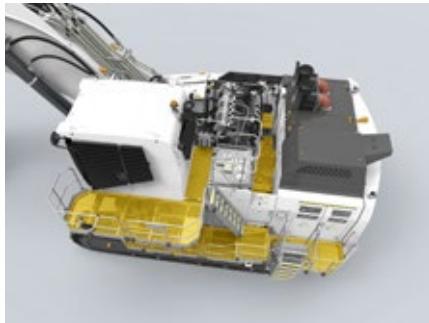

## Wide catwalks for inspection

Enlarged walkways allow easy and safe access for inspection and maintenance around engine, fans, and pumps. All routine service items have been located to allow effortless inspection and replacement.




## Emergency stops and emergency exits

Emergency stops are specifically located throughout the machine, increasing safety. A emergency drop-down ladder guarantees safe and quick exit from the machine.



## Advanced engine fire protection

After treatment systems and turbo-chargers are heat shielded. The engines are mechanically segregated from hydraulic components, further improving on machine safety.

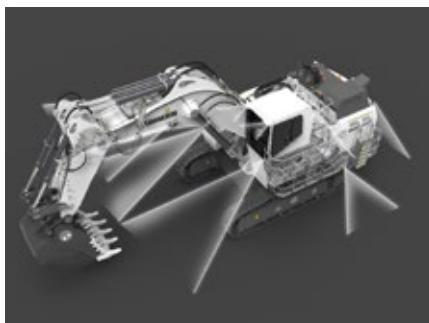


## LED lighting system

Thanks to LED long-reach lights located on attachment, uppercarriage and counterweight, the machine offers best visibility to the operator and to the people / equipment around.



## Safe surrounding area

Horn, LED working lights, LED service lights, LED access lights, flashing lights and travel alarm guarantee safe 24/7 operation and maintenance conditions.

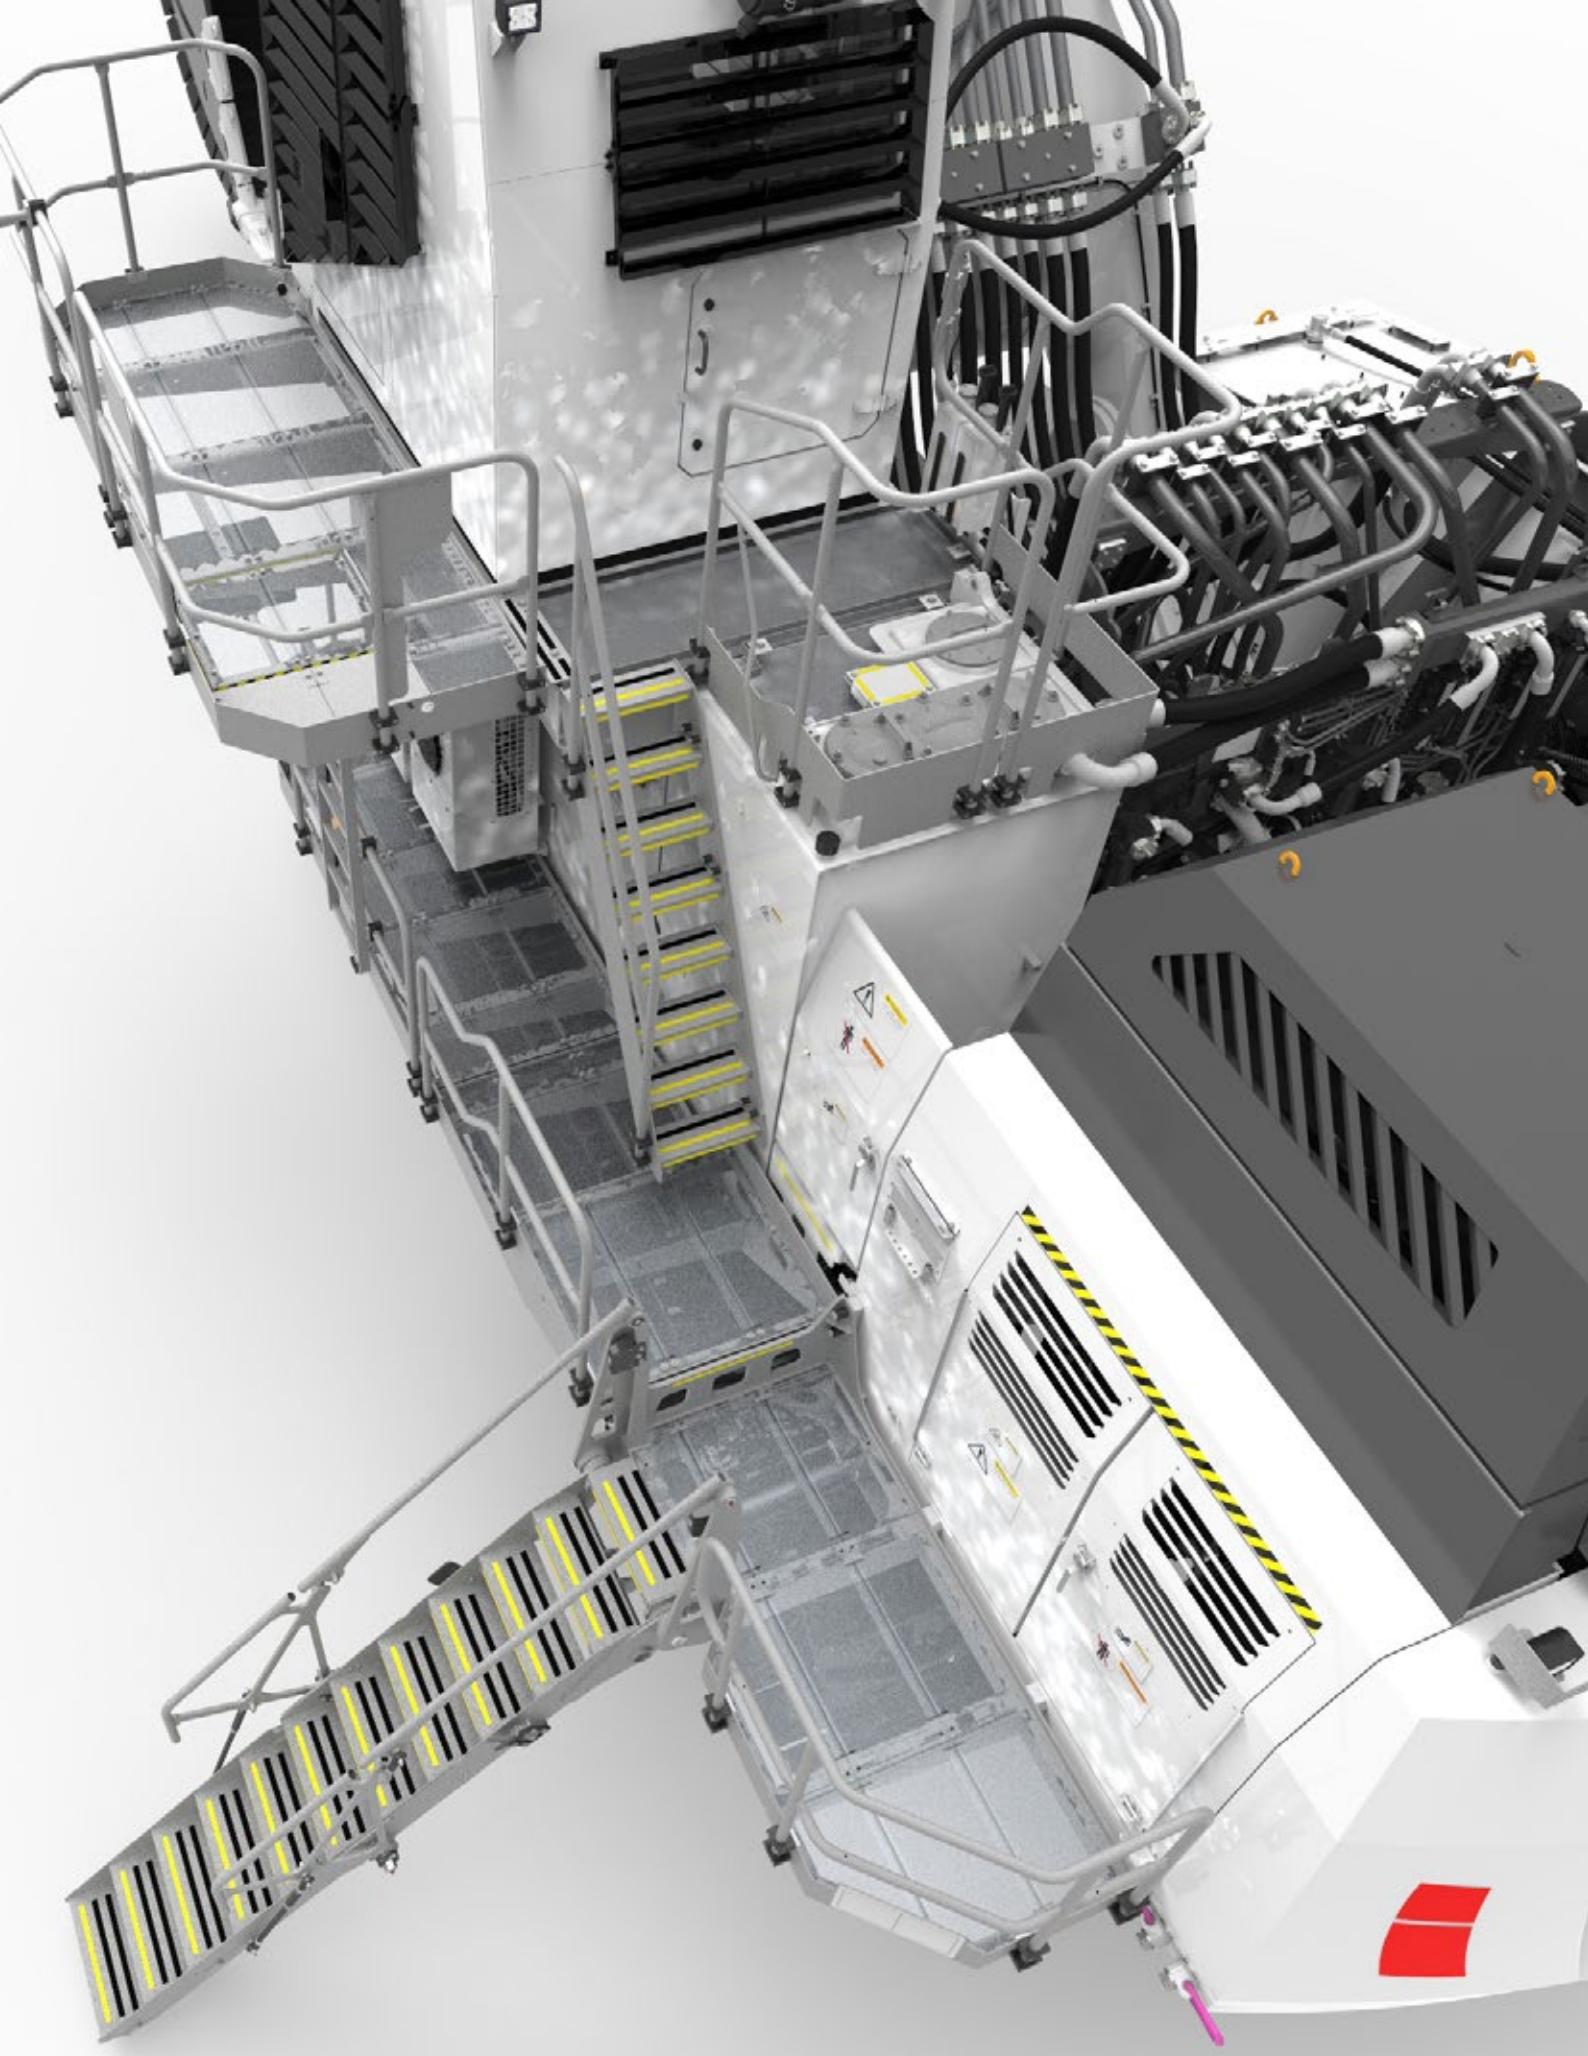

Maintenance

# Easy & safe operations

---



**24 / 7**

Operations

## Centralised service & service flap

Uppercarriage of the R 9200 has been designed for easier maintenance and quicker servicing. The central service area provides accessibility to uppercarriage fluid compartments reducing machine downtime. Refill and drain points of the

R 9200 are easily accessed from the upperstructure or directly from the ground with the service flap equipped with fast couplings and depressurized valves.



### Automatic greasing system

- Grease tank for the attachment, uppercarriage and swing ring bearing
- Grease tank for the swing ring teeth
- Simplified component layout
- Automatic greasing cycles
- Reduced number of injectors & hoses
- Electric shut-off valve in the refill line

### Superior engine accessibility

- Central service area
- Maintenance-friendly maintenance items installation
- Wide catwalks with slip-resistant surfaces

### Ease of troubleshooting

- Control system hardware and software completely developed and managed by Liebherr
- Reduced number of connections and connectors

## Optional

- Rock protection for swing gear
- Undercarriage bottom cover

- Steel grease lines on swing ring
- Swing ring scrapers

- Banlaw or Wiggins couplings
- Piston rod guards
- Kidney loop filtration system



**45,000**  
Operational hours

# Reliability

# Long-lasting performances

---

## Vertical integration

As an OEM, Liebherr has built a solid reputation for its development and production of high quality strategic mining components. The R 9200 integrates robust and reliable mining optimised components that are developed and manufactured by Liebherr, which ensures the best reliability and highest performance.

## Quality: the Liebherr trademark

Providing reliable machinery is the highest priority for Liebherr mining. Utilised in tough mining applications all around the world, our R 9200 is built to last over 45,000 operational hours. Liebherr's engineering expertise and continuous improvement programs combine to deliver industry leading machines.

## Mining know-how


Liebherr mining excavators are conceptualised, designed and dedicated to the mining industry. The engineering department uses specific 3D simulation solutions in order to meet possible requirements, such as finite element and fatigue life analysis.

## Super structure

- Optimised welding penetration
- Increased structural rigidity and life
- Heavy duty conception through advanced 3D design and validation softwares

## Robust undercarriage

- Heavy-duty conception with durable side frame links
- Fatigue resistant steel structure design
- Travel motors with standard rock protection
- Large track pads choice

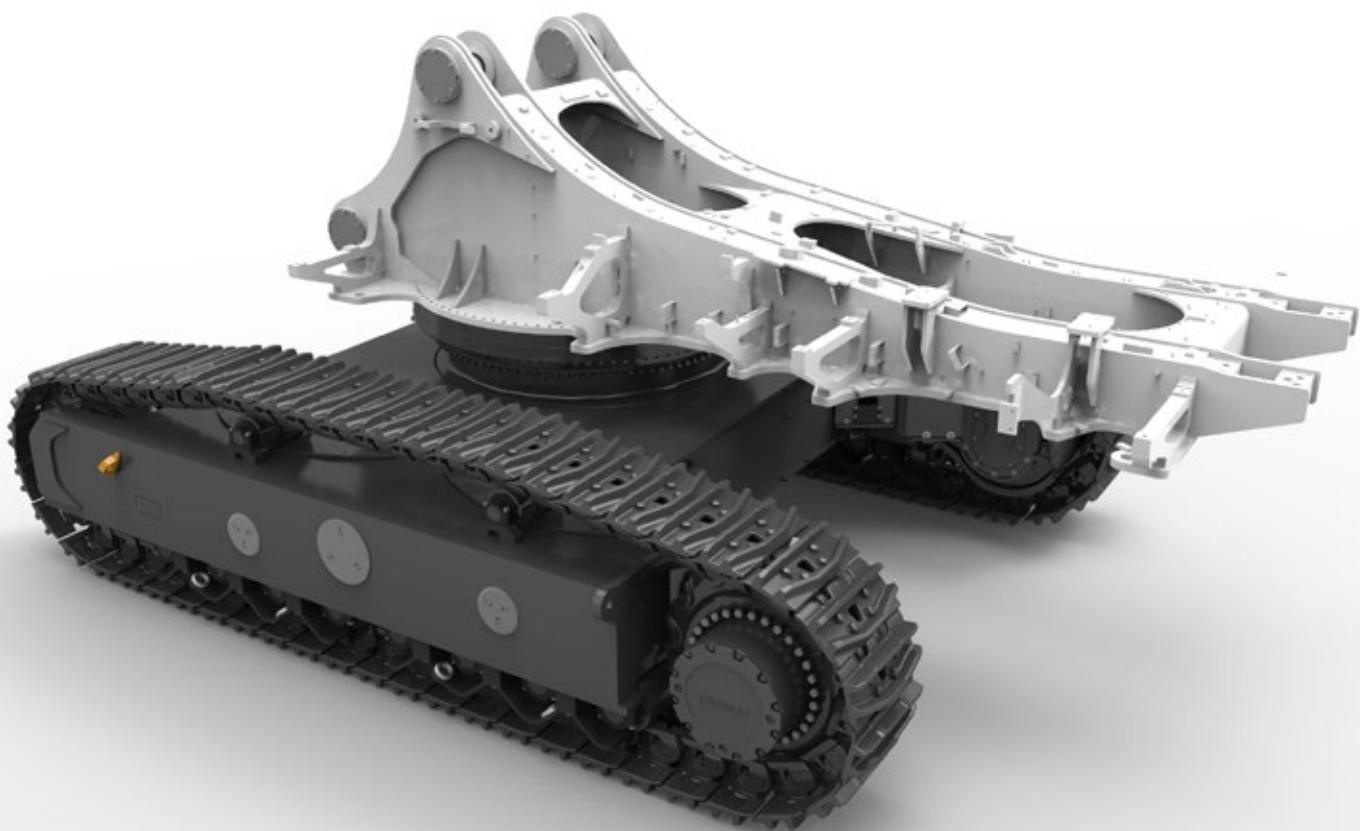

# The four pillars of the Liebherr mining division

---

With more than 50 years of experience in the mining industry, Liebherr has identified four key factors of customer satisfaction: Performance, Safety, Service, and Sustainability. These pillars provide structure and focus for all our activities, and embody Liebherr's customer commitments.





### Performance

Productive, efficient and reliable



### Safety

Protecting your most important assets



### Service

Where you need it, when you need it



### Sustainability

Committed to our future



# Technical data

## Powertrain

1 Cummins ICE – Diesel	
Rating per SAE J1995	810kW (1,086 HP) at 1,800rpm
Model	Cummins QSK38 (US EPA Tier 4f / EU Stage V compliant or fuel consumption optimized setting)
Type	12 cylinder V-engine
Bore / Stroke	159 / 159 mm / 6.26 / 6.26 in
Displacement	37.8l / 2,307 in <sup>3</sup>
Aspiration	turbocharged after cooled
Fuel tank capacity	4,500l / 1,189 gal
DEF tank capacity	665l / 176 gal
Electrical system	
Voltage	24 V, 25 V additional
Batteries	4 x 180 Ah / 12V
Alternator	24V / 260A
Liebherr Power Efficiency – Engine Control	engine management systems adapting the power specifically to the load profile
Automatic engine shut off protection	engine self-controlled shut off 3 min.
Water cooler	cooler with temperature controlled fans driven via hydraulic piston motor
or	
1 GE E-Motor	
Power output	850kW (1,139 HP)
Type	3-phase AC squirrel cage motor
Voltage	6,000V, other voltage on request
Frequency	50Hz (or 60Hz)
Revolutions	1,500 rpm or 1,800 rpm
Motor cooling	integrated air-to-air heat exchanger
Starting method	inrush current limited to 2.2 full load current

## Electro-hydraulic controls

Servo circuit	independent, electric over hydraulic proportional controls of each function
Emergency control	via accumulator for all attachment functions with stopped engine
Power distribution	via monoblock control valves with integrated primary relief valves and flanged on secondary valves, 4 independent circuits
Flow summation	attachment and travel drive
Attachment and swing	proportional via electronic joystick levers
Travel	proportional via electronic pedals or removable hand levers
Shovel flap functions	proportional via electronic pedals
Electronic dampening system	Liebherr designed electronic control of cylinder position via inertial measurement units

## Swing drive

Hydraulic motor	2 Liebherr axial piston motors
Swing gear	2 Liebherr planetary reduction gears
Swing ring	Liebherr, sealed triple roller swing ring, internal teeth
Swing speed	0-5.0 rpm
Swing-holding brake	hydraulically actuated, maintenance-free, multi-disc brakes integrated in each swing gear

## Hydraulic system

Hydraulic pump for attachment and travel drive	4 variable flow axial piston pumps
Max. flow	4 x 512l/min. / 4 x 135 gpm
Max. pressure	350bar / 5,076 psi
for swing drive	1 reversible swashplate pump, closed-loop circuit
Max. flow	1 x 640l/min. / 1 x 169 gpm
Max. pressure	350bar / 5,076 psi
Pump management	electronically controlled pressure, flow and power management with oil flow optimisation
Hydraulic tank capacity	1,800l / 475 gal
Hydraulic system capacity	3,400l / 900 gal
Hydraulic oil filter	1 high pressure safety filter after each high pressure pump + extra-fine filtration of entire return flow with integrated by-pass filtration (15 / 5 µm) + dedicated leak-oil filtration
Hydraulic oil cooler	cooler with temperature controlled fans driven via hydraulic piston motor, reverse fan function
Liebherr Power Efficiency – Hydraulic Control	hydraulic management system adapting the hydraulic flow specifically to the load profile

## Electric system

Electric isolation	easy accessible battery isolators
Working lights	high brightness LED lights: - 4 on cabin - 2 on working attachment with grid protection - 3 on RHS of uppercarriage - 3 on LHS of uppercarriage other: - LED service lights with timer 20 min.
Emergency stop switches	at ground level, in hydraulic compartment, in engine compartment and in operator cab
Electrical wiring	heavy duty execution in IP 65 standard for operating conditions of -50 °C to 100 °C / -58 °F to 212 °F

## Undercarriage

Design	3-piece undercarriage, box-type structures for center piece and side frames, stress relieved
Hydraulic motor	1 axial piston motor per side frame
Travel gear	Liebherr planetary reduction gear
Travel speed	0-2.8 km/h / 0-1.70 mph
Parking brake	hydraulically actuated, maintenance-free, multi-disc brakes for each travel motor
Track components	B 11, maintenance-free, forged double grouser pad
Track rollers / Carrier rollers	8/2 per side frame
Track tensioner	hydraulic and grease tensioner
Transport	undercarriage side frames are removable

## Uppercarriage

Design	torque resistant designed upper frame in boxtype construction for superior strength and durability
Attachment mounting	parallel longitudinal main girders in box section construction
Machine access	hydraulically operated 45° access stair, full controlled descent, in case of emergency stop additional emergency ladder fitted near the cab

## Cab

Design	resiliently mounted, sound insulated, large windows for all around visibility, integrated falling object protection FOPS (ISO 10262)
Operator's seat	suspended pneumatic seat, body-contoured with shock absorber, adjustable to operator's weight, seat heating, additional "retractable" passenger / trainer seat"
Cabin windows	tinted armored glass for front window and right-hand side windows, all other windows in tinted safety glass, wind-shield-washer system 30l / 8 gal watertank, sun louvers on all windows in heavy duty design optional and frontguard optional
Heating system / Air conditioning	heavy duty, fully automatic, high output air conditioner and heater unit, contains fluorinated greenhouse gases HFC 134a with a Global Warming Potential (GWP) of 1430, the AC circuit contains 3.6 kg / 7.9 lb of HFC-134 representing an equivalent of 5.1 tonnes / 5.6 tons of CO <sub>2</sub> , the 2 <sup>nd</sup> AC circuit (optional) contains 2.2 kg / 4.8 lb of HFC-134 representing an equivalent of 3.1 tonnes / 3.4 tons of CO <sub>2</sub>
Cabin pressurization	ventilation with filter
Controls	joystick levers integrated into armrest of seat
Monitoring	via LCD-display, data memory
Rear vision system	camera installation on counterweight and right-hand side of the uppercarriage, displayed on the monitoring display
Noise level (ISO 6396)	Diesel: L <sub>PA</sub> (inside cab) = 71 dB(A)
Hand-arm vibrations	≤ 2.5 m/s <sup>2</sup>
Whole-body vibrations	≤ 0.5 m/s <sup>2</sup>

## Service flap

Design	manually actuated service flap, easily accessible from ground level to allow: - fuel fast refill - engine oil quick change - attachment / swing ring bearing grease barrel refilling via grease filter - 2 x swing gear oil refill - 2 x swing gear oil draining - splitterbox oil change other coupler type on request
--------	--


## Central lubrication system

Type	single-line lubrication system, for the entire attachment / swing ring bearing and teeth
Grease pumps	hydraulic grease pump for the attachment / swing ring bearing, electric grease pump for the swing ring teeth
Capacity	200l / 53 gal bulk container for attachment / swing ring bearing, separated 15l / 4.0 gal bulk container for swing ring teeth
Refill	via the service flap for both containers, fill line with grease filters
Monitoring	via a specific Liebherr control module with data memory


## Attachment

Design	box-type structure with large steel castings in all high-stress areas
Stick	wear protection underneath lower beam plate
Hydraulic cylinder	Liebherr design, electronically controlled end-cushioning
Hydraulic connections	pipes and hoses equipped with SAE flange connections
Pivots bucket-to-stick	O-ring sealed and completely enclosed
Pivots bucket-to-link	Liebherr parallel face shovel attachment geometry, electronic controlled end-cushioning
Kinematics	

# Dimensions

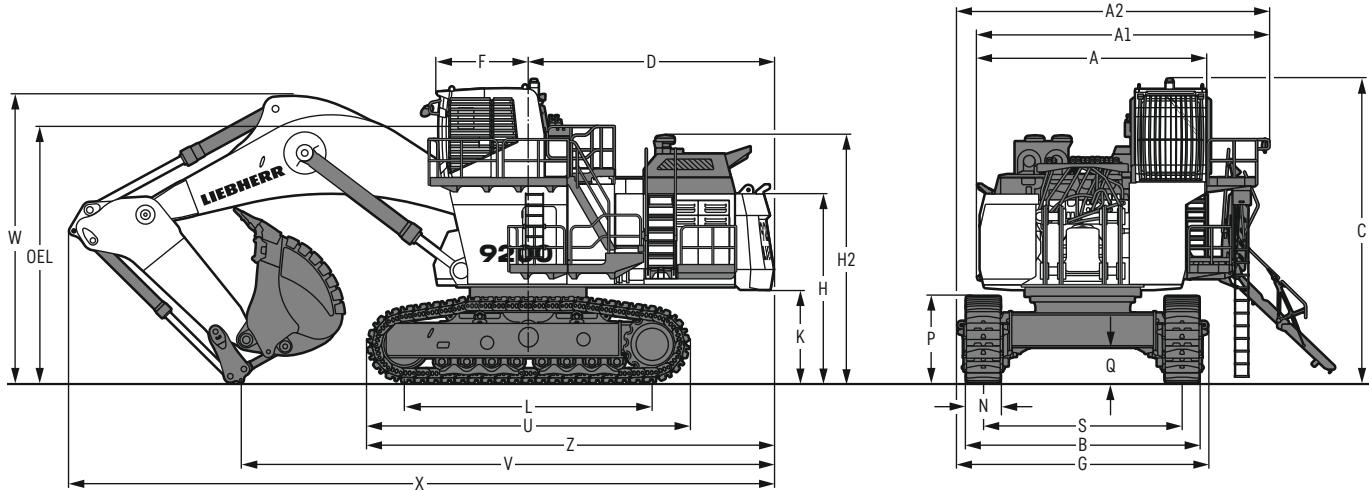

	mm/ft in		mm/ft in		mm/ft in		mm/ft in	
A	5,400/17'9"	D	5,800/19'	L	5,862/19'3"	U	7,600/24'11"	
A1	6,920/22'8"	F	2,158/ 7'1"	N	800/ 2'7"	V	10,700/35' 1"	
A2	7,400/24'3"	H	4,440/14'7"	P	2,040/ 6'8"	W	6,780/20' 3"	
B	5,930/19'5"	H2	5,815/19'1"	Q	837/ 2'9"	X	16,700/54' 9"	
C	7,175/23'6"	K	2,175/ 7'2"	S	4,700/15'5"	Z	9,600/31' 6"	
OEL (Operator's eye level)								

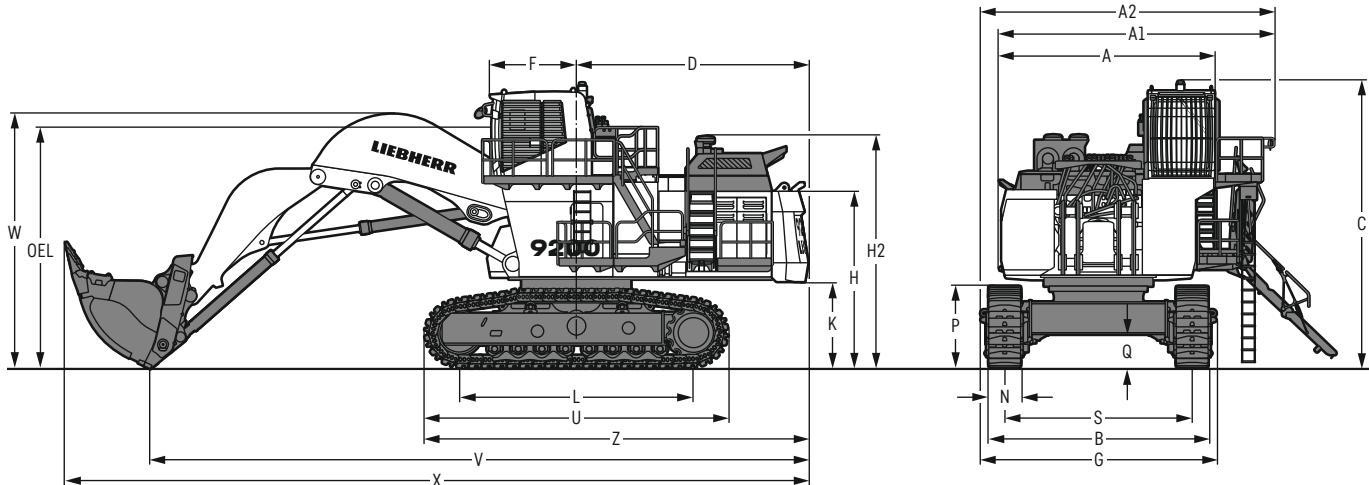


	mm/ft in		mm/ft in		mm/ft in		mm/ft in	
A	5,400/17'9"	D	5,800/19'	L	5,862/19'3"	U	7,600/24'11"	
A1	6,920/22'8"	F	2,158/ 7'1"	N	800/ 2'7"	V	14,500/47' 7"	
A2	7,400/24'3"	H	4,440/14'7"	P	2,040/ 6'8"	W	6,500/21' 4"	
B	5,930/19'5"	H2	5,815/19'1"	Q	837/ 2'9"	X	18,700/61' 4"	
C	7,175/23'6"	K	2,175/ 7'2"	S	4,700/15'5"	Z	9,600/31' 6"	
OEL (Operator's eye level)								

According to ISO 9248, measurements of general machinery dimensions, performances and capacities may vary within tolerances given by this norm.

# Backhoe attachment (standard)

with mono boom 8.50 m / 27'9"

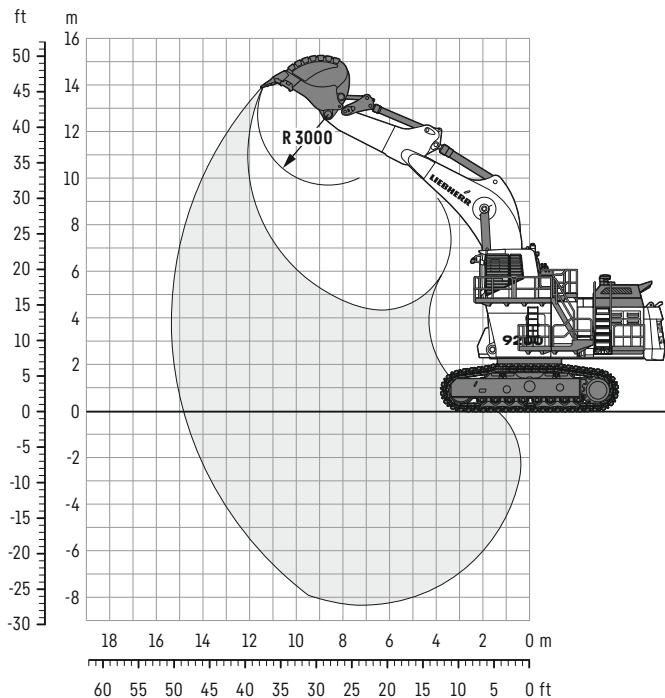

## Digging envelope

Stick length	m ft in	3.80 12'5"
Max. digging depth	m ft in	8.30 27'2"
Max. reach at ground level	m ft in	14.80 48'7"
Max. dumping height	m ft in	9.70 31'10"
Max. teeth height	m ft in	14.00 46'

## Forces

Max. digging force (ISO 6015)	kN lbf	650 146,126
Max. breakout force (ISO 6015)	kN lbf	740 166,359

Machine shown without option with a bucket for average material abrasiveness and 1.8 t/m<sup>3</sup> (3,034 lb/yd<sup>3</sup>) density.

The characteristics of the material to be extracted and additional options can change the bucket volume, its shape, its radius and therefore may also change the work area reachable by the bucket.

## Operating weight and ground pressure

The operating weight includes the basic machine with backhoe attachment and backhoe bucket 12.50 m<sup>3</sup>/16.35 yd<sup>3</sup>.

Pad width	mm ft in	800 2'6"
Weight	t sh tn	205 225
Ground pressure*	kg/cm <sup>2</sup> psi	1.98 28.16

\* according to ISO 16754

## Backhoe buckets

For materials class according to VOB, Section C, DIN 18300	<5	<5	<5	5-6	5-6	5-6	7-8	7-8	7-8	7-8
Typical operation according to VOB, Section C, DIN 18300	GP	GP	GP	HD	HD	HD	XHD	XHD	XHD	XHD
Capacity ISO 7451	m <sup>3</sup> yd <sup>3</sup>	15.50 20.3	14.00 18.3	12.50 16.4	14.00 18.3	12.50 16.4	11.50 15.0	12.50 16.4	11.50 15.0	10.50 13.7
Suitable for material up to a specific weight of	t/m <sup>3</sup> lb/yd <sup>3</sup>	1.45 2,445	1.68 2,833	1.90 3,204	1.60 2,698	1.80 3,035	1.95 3,288	1.70 2,867	1.95 3,288	2.15 3,626
Cutting width	mm ft in	3,100 10'2"	2,900 9'6"	2,800 9'2"	2,900 9'6"	2,800 9'2"	2,650 8'8"	2,800 9'2"	2,750 9'	2,700 8'10"
Weight	kg lb	11,900 26,235	10,900 24,030	10,700 23,589	11,900 26,235	11,560 25,485	11,700 25,794	13,200 29,101	12,050 26,566	11,900 26,235

GP: Loading bucket with Liebherr Z10 teeth


HD: Heavy-duty bucket with Liebherr Z12 teeth

XHD: Heavy-duty rock bucket with Liebherr Z12 teeth

According to ISO 9248, measurements of general machinery dimensions, performances and capacities may vary within tolerances given by this norm.

# Face shovel attachment

with shovel boom 6.00 m / 19'7"

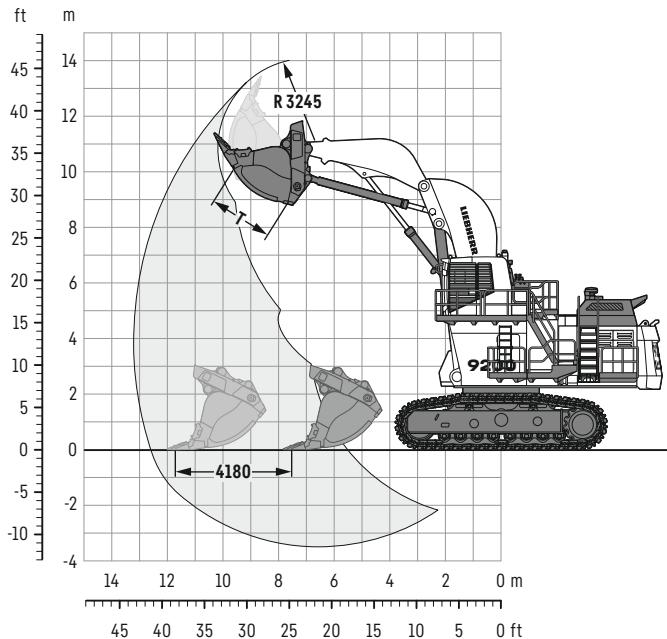

## Digging envelope

Stick length	m ft in	4.37 14'4"
Max. reach at ground level	m ft in	12.60 41'4"
Max. dumping height	m ft in	9.00 29'5"
Max. crowd length	m ft in	4.20 13'8"
Bucket opening width T	m ft in	2.20 7'1"

## Forces

Max. crowd force at ground level (ISO 6015)	kN lbf	868 195,134
Max. crowd force (ISO 6015)	kN lbf	924 207,723
Max. breakout force (ISO 6015)	kN lbf	750 168,606

Machine shown without option with a bucket for average material abrasiveness and 1.8t/m<sup>3</sup> (3,034lb/yd<sup>3</sup>) density.

The characteristics of the material to be extracted and additional options can change the bucket volume, its shape, its radius and therefore may also change the work area reachable by the bucket.

## Operating weight and ground pressure

The operating weight includes the basic machine with shovel attachment and bucket 12.50 m <sup>3</sup> / 16.35 yd <sup>3</sup> .		
Pad width	mm ft in	800 2'6"
Weight	t sh tn	210 231
Ground pressure*	kg/cm <sup>2</sup> psi	2.02 28.73

\* according to ISO 16754

## Face shovel buckets

For materials class according to VOB, Section C, DIN 18300	<5	<5	5-6	5-6	5-6	7-8	7-8	7-8
Typical operation according to VOB, Section C, DIN 18300	GP	GP	HD	HD	HD	XHD	XHD	XHD
Capacity ISO 7451	m <sup>3</sup> yd <sup>3</sup>	14.00 18.3	13.50 17.7	13.50 17.7	12.50 16.4	11.50 15.0	12.50 16.4	11.50 15.0
Suitable for material up to a specific weight of	t/m <sup>3</sup> lb/yd <sup>3</sup>	1.6 2,698	1.7 2,867	1.6 2,698	1.8 3,035	2.0 3,373	1.7 2,867	1.9 3,204
Cutting width	mm ft in	3,050 10'						
Weight	kg lb	17,600 38,801	17,000 37,479	18,400 40,565	17,500 38,581	17,000 37,479	18,750 41,337	18,150 40,014

GP: Loading bucket with Liebherr Z10 teeth

HD: Heavy-duty bucket with Liebherr Z12 teeth

XHD: Heavy-duty rock bucket with Liebherr Z12 teeth

According to ISO 9248, measurements of general machinery dimensions, performances and capacities may vary within tolerances given by this norm.

# Optional equipment

## Undercarriage

Undercarriage bottom cover  
Rock protection for travel drive

## Uppercarriage

Fast fueling system with Multiflo Hydraul-Flo®  
Wiggins / Banlaw counter plugs for fuel / lube trucks  
Rock protection for swing gear  
Steel grease lines on swing ring  
Semi-automatic swing brake with joystick control  
Swing ring scrapers  
External grease refill station (hydraulic-powered)  
Hydraulic connection with quick coupler for external grease refill station

## Hydraulic system

Bio-degradable hydraulic oil  
Oil cooler inlet screens

## Cab

Front protective grid  
Double A/C system  
External louvers on back and side cab windows  
Operator comfort package  
Sliding hatch window on door  
HEPA filtration system

## Attachment

Piston rod guard for bucket cylinder (BH)  
Piston rod guard for hoist cylinder (BH / FS)

## Specific solutions

Arctic package (different stages available)  
High altitude package

## Safety

Automatic fire suppression system  
Isolation & energy dissipation system - MDG 41 compliant

## General

Maritime transport packaging

## IoMine

Truck Loading Assistant  
Operational Analytics  
Bucket Filling Assistant

The photos in this brochure represent machines in operation that may be equipped with local options not developed by, or available from, a Liebherr factory. Please contact your Liebherr representative if you have any questions about options not mentioned above.

## Notes





Mining excavator



Mining truck



Mining dozer



Mining dragline



Service tools



Customer service

## Quality commitment

- Liebherr-Mining Equipment Colmar, France, ISO 9001 certified
- Compliance of materials tested in laboratory
- Quality control during all stages of production
- CE certified, MDG 15 & MDG 41 compliant

Subject to technical modifications. All comparisons and claims of performance are made with respect to the prior Liebherr model unless specifically stated.

### Liebherr-Mining Equipment Colmar SAS

49 rue Willi Liebherr · 68025 Colmar Cedex, France · Phone +33 369 49 20 00  
info.lec@liebherr.com · www.liebherr.com · www.facebook.com/LiebherrMining